



SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 162A



| | | | 111 |
|--|-------------------------------|-----|---|
| Product designation Product type designation | | | Soft Starter ADXL |
| Motor type | | | Asynchronous three phase |
| Electrical features | | | · |
| Supplies voltage | | | |
| | Type of system | | Three phase |
| | Rated supply voltage | V | 208600VAC |
| | auxiliary supply voltage (Us) | | 100240VAC |
| | Rated frequency | Hz | 50/60 |
| Rated starter current le | | Α | 162 |
| Rated motor power | | | |
| IEC ratings (T≤40°C) | | | |
| | 230VAC | kW | 45 |
| | 400VAC | kW | 90 |
| | 500VAC | KW | 110 |
| UL ratings (T≤40°C) | | | |
| | 220-240VAC | HP | 60 |
| | 380-415VAC | HP | 75 |
| | 440-480VAC | HP | 125 |
| | 550-600VAC | HP | 150 |
| Number of controlled phases | | Nr. | 2 |
| Built-in bypass | | | Yes |
| Cooling System | | | Forced |
| Rated insulation voltage Ui | | V | 600 |
| Programming interface | | | |
| Display | | | Backlit icon LCD display |
| Programming with NFC technology | | | Yes |
| Optical port | | | Yes |
| Startup and stop settings | | | 103 |
| Startup method | | | Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit |
| Stop method | | | Torque ramp, voltage ramp, free-wheel stop |
| Protections | | | |
| Auxiliary supply protection | | | Voltage too low |





SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 162A

| Power supply Protection | No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage |
|---|---|
| Motor protection | Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), |
| Starter protection | Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request |
| Functions | |
| Built-in bypass | 2 |
| Built-in display and keypad | Yes |
| Languages | Yes |
| View measurements | 6 |
| Torque control | Yes |
| | |
| Adjustable current limit | Yes |
| Dynamic braking | Yes |
| Dynamic braking Kick Start function | Yes No |
| Dynamic braking Kick Start function Motor overload electronic protection | Yes No Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input | Yes No Yes Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss | Yes No Yes Yes Yes Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion | Yes No Yes Yes Yes Yes Yes Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor | Yes No Yes Yes Yes Yes Yes Yes Yes Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature | Yes No Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load | Yes No Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm | Yes No Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs | Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs | Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs | Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output | Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication | Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming | Yes |
| Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication | Yes |





SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 162A


| Clock calendar | | | | Yes |
|-----------------------|-----------------------|----------------------------|------|------------------------------------|
| Remote external keypa | ad | | | No |
| Plug-in version | | | | Optional |
| Input and Output | | | | |
| Digital inputs | | No. of Particles of | N.1. | 0 |
| | | Number of digital input | Nr. | 3 |
| | | | | 2 input with dry contact + 1 input |
| | | Digital input type | | with dry contact |
| | | | | or PTC |
| | | | | (configurable) |
| | | | | Programmable (motor start, |
| | | | | motor stop, |
| | | | | freewheel stop, |
| | | | | motor preheating |
| | | Digital input functions | | commands lock, alarms inhibition, |
| | | | | thermal status |
| | | | | reset, keyboard |
| | | | | lock, motor selection, user |
| | | | | alarm, command) |
| Digital outputs | | | | |
| | | Number of digital output | Nr. | 3 |
| | | | | 2 x 1 NO (SPST) |
| | | | | + 1 C/O (SPDT) Ratings: 2 x 1NO |
| | | | | contacts: 3A |
| | | | | 250VAC - 3A |
| | | Digital output arrangement | | 30VDC 1 x C/O contact: NO |
| | | Digital output arrangement | | contact 5A |
| | | | | 250VAC - 5A |
| | | | | 30VDC; NC |
| | | | | contact 3A |
| | | | | 250VAC - 3A 30VDC |
| | | | | Programmable |
| | | | | (line contactor, |
| | | Division to the contract | | run, global alarm, |
| | | Digital output functions | | limits, remote variable, alarm |
| | | | | Axx, user alarm |
| | | | | Axx, OFF) |
| Ambient conditions | | | | |
| Temperature | Operating temperature | | | |
| | Sporacing temperature | min | °C | -20 |
| | | | | +60°C (with |
| | | max | °C | current derating |
| | | | = | >40°C of 0.5%/ °C) |
| | Storage temperature | | | <u> </u> |
| | c.orago tomporataro | min | °C | -30 |
| | | max | °C | +80 |
| | | | | |

ENERGY AND AUTOMATION

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 162A

| Max altitude | m | 1000 without derating (over 1000mt with current derating of 0.5%/100m) |
|-------------------------|----|--|
| Relative humidity | % | <80% |
| Pollution degree | | 2 |
| Installation category | | III |
| Housing | | |
| Mounting | | Screw-fixing |
| IP degree of protection | | IP00 |
| Dimensions (W x H x D) | mm | 212 x 301 x 216 |
| Weight | Kg | 7.8 |
| Dimensions | | |

212 (8.35") 195 (7.68") 90 (3.54") Ø10.60 (0.42") (0.98") @L1 5 L3⊚ 00000000 154 (6.06") 275 (10.82") 301 (11.85") 0 0 - 0 000000 00 ⊚_{T1} 6 T3◎

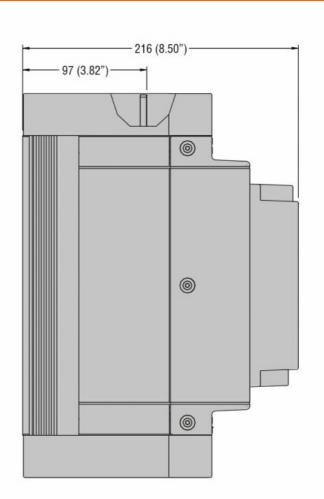

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508

Certificates

cULus

EAC

RCM

ETIM classification



ADXL0162600

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 162A

ETIM 8.0

EC000640 - Soft starter