



Product designation

Power contactor

Product type designation

B250

**Contact characteristics**

Number of poles	Nr.	3
Rated insulation voltage $U_i$ IEC/EN	V	1000
Rated impulse withstand voltage $U_{imp}$	kV	8
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current $I_{th}$	A	350
Operational current $I_e$	AC-1 ( $\leq 40^\circ\text{C}$ )	A 350
	AC-1 ( $\leq 55^\circ\text{C}$ )	A 300
	AC-1 ( $\leq 70^\circ\text{C}$ )	A 250
	AC-3 ( $\leq 440\text{V } \leq 55^\circ\text{C}$ )	A 265
	AC-4 (400V)	A 115
Rated operational power AC-3 ( $T \leq 55^\circ\text{C}$ )	230V	kW 83
	400V	kW 140
	415V	kW 155
	440V	kW 164
	500V	kW 176
	690V	kW 212
	1000V	kW 156
Rated operational power AC-1 ( $T \leq 40^\circ\text{C}$ )	230V	kW 124
	400V	kW 214
	500V	kW 282
	690V	kW 380
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	75V	A 350
	110V	A 160
	220V	A --
	330V	A --
	460V	A --
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	75V	A 350
	110V	A 300
	220V	A 250
	330V	A --
	460V	A --
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	75V	A 350
	110V	A 300
	220V	A 300

	330V	A	250
	460V	A	--
IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 4 poles in series			
	75V	A	350
	110V	A	300
	220V	A	300
	330V	A	300
	460V	A	250
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	75V	A	280
	110V	A	150
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	75V	A	280
	110V	A	250
	220V	A	200
	330V	A	--
	460V	A	--
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	75V	A	280
	110V	A	280
	220V	A	250
	330V	A	200
	460V	A	--
IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	75V	A	280
	110V	A	280
	220V	A	280
	330V	A	200
	460V	A	200
Short-time allowable current for 10s (IEC/EN60947-1)		A	2200
Protection fuse			
	gG (IEC)	A	400
	aM (IEC)	A	250
Making capacity (RMS value)		A	2750
Breaking capacity at voltage			
	440V	A	2500
	500V	A	2250
	690V	A	2200
Resistance per pole (average value)		mΩ	0.2
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	24.5
	AC-3	W	12.5
Tightening torque for terminals			
	min	Nm	35
	max	Nm	35
	min	lbin	25.8
	max	lbin	25.8
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1

	min	I <sub>bin</sub>	0.74
	max	I <sub>bin</sub>	0.74
Max number of wires simultaneously connectable		Nr.	2
Conductor section			
	AWG/Kcmil		
	max		500 kcmil
Power terminal protection according to IEC/EN 60529			IP00
<b>Mechanical features</b>			
Operating position			
	normal allowable		Vertical plan ±30°
Fixing			Screw
Weight		g	9560
Conductor section			
	AWG/kcmil conductor section		
	max		500 kcmil
<b>Operations</b>			
Mechanical life		cycles	10000000
Electrical life		cycles	1000000
<b>Safety related data</b>			
Performance level B10d according to EN/ISO 13489-1			
	rated load mechanical load	cycles cycles	1000000 10000000
Mirror contacts according to IEC/EN 60947-4-1			yes
EMC compatibility			yes
<b>AC coil operating</b>			
Rated AC voltage at 50/60Hz, 60Hz			
	min	V	220
	max	V	240
AC operating voltage			
	of 50/60Hz coil powered at 50Hz		
	pick-up		
	min	%U <sub>s</sub>	80
	max	%U <sub>s</sub>	110
	drop-out		
	min	%U <sub>s</sub>	20
	max	%U <sub>s</sub>	60
	of 50/60Hz coil powered at 60Hz		
	pick-up		
	min	%U <sub>s</sub>	80
	max	%U <sub>s</sub>	110
	drop-out		
	min	%U <sub>s</sub>	20
	max	%U <sub>s</sub>	60
	of 60Hz coil powered at 60Hz		
	pick-up		
	min	%U <sub>s</sub>	80
	max	%U <sub>s</sub>	110
	drop-out		
	min	%U <sub>s</sub>	20
	max	%U <sub>s</sub>	60
AC average coil consumption at 20°C			
	of 50/60Hz coil powered at 50Hz		


		in-rush	VA	300
		holding	VA	10
of 50/60Hz coil powered at 60Hz				
		in-rush	VA	300
		holding	VA	10
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W		10
DC coil operating				
DC rated control voltage				
		min	V	220
		max	V	240
DC operating voltage				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$				
		in-rush	W	300
		holding	W	10
Max cycles frequency				
Mechanical operation		cycles/h		2400
Operating times				
Average time for Us control				
in AC		Closing NO		
		min	ms	80
		max	ms	120
		Opening NO		
		min	ms	30
		max	ms	75
in DC		Closing NO		
		min	ms	80
		max	ms	120
		Opening NO		
		min	ms	30
		max	ms	75
UL technical data				
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	240
		at 600V	A	242
Yielded mechanical performance				
for three-phase AC motor		200/208V	HP	75
		220/230V	HP	100
		575/600V	HP	250
General USE				
Contactor		AC current		
		A		350
Short-circuit protection fuse, 600V				
Standard fault		Short circuit current		
		kA		18
		Fuse rating		
		A		800

		Fuse class		L
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-50
		max	°C	70
	Storage temperature			
		min	°C	-60
		max	°C	80
Max altitude			m	3000


**Resistance & Protection**

Pollution degree	3
------------------	---

**Dimensions**

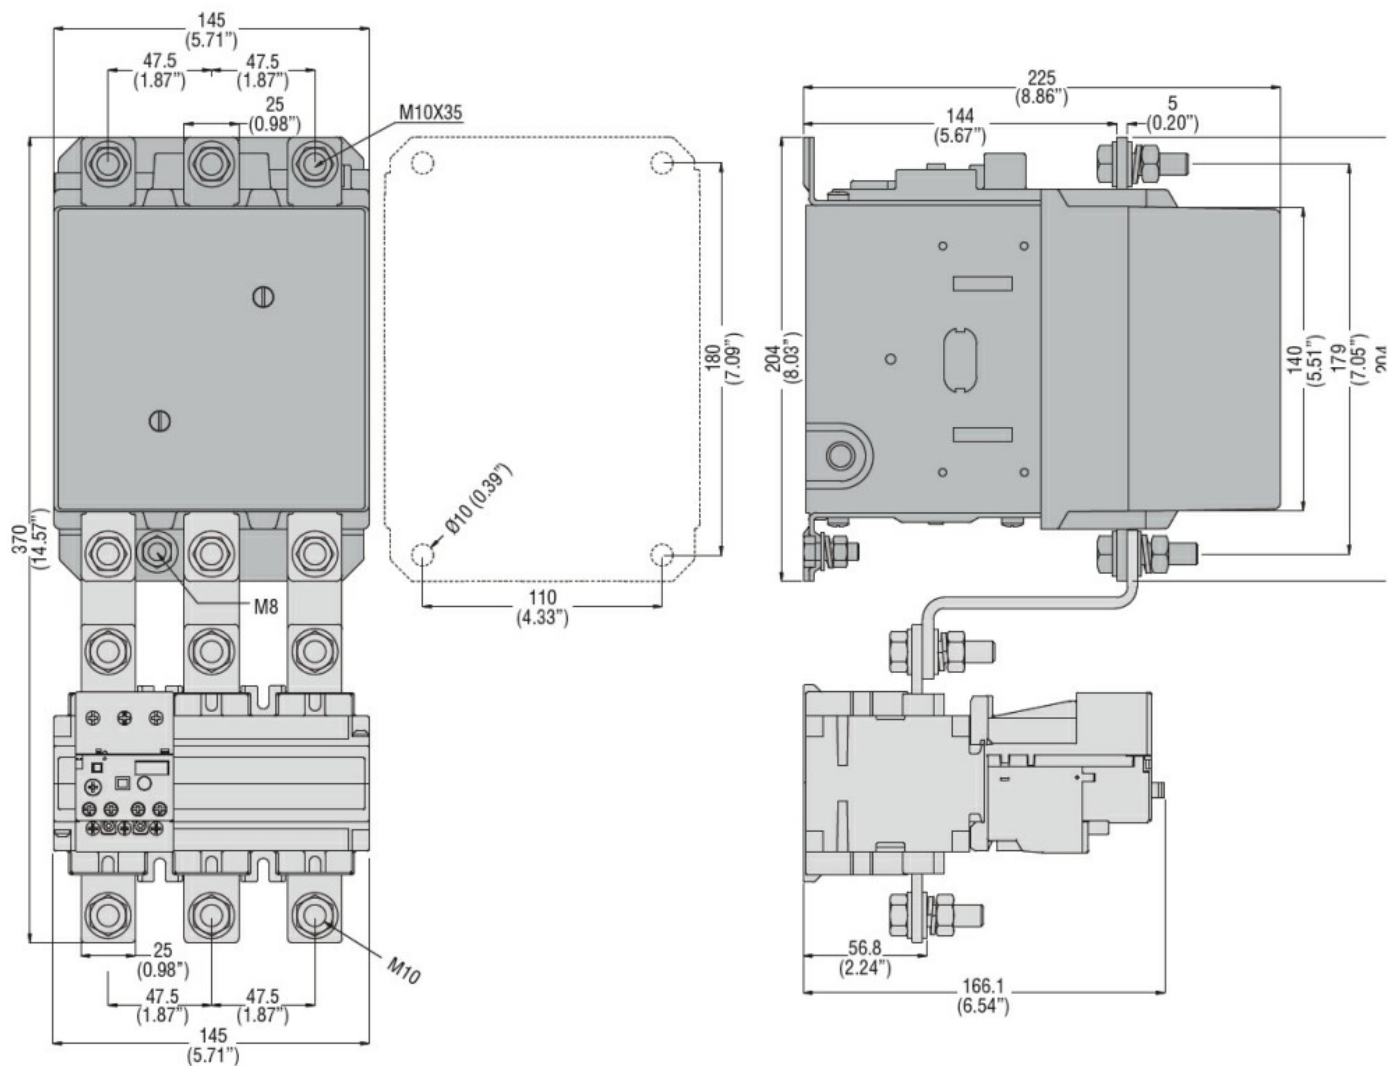

**Wiring diagrams**

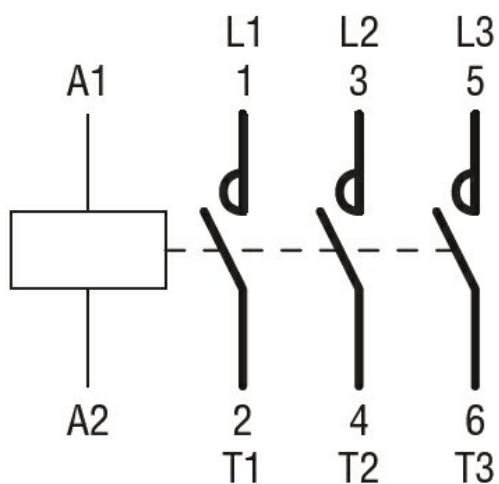

## Certifications and compliance

### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

### Certificates

CCC

cULus

EAC

## ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching