



Product designation			Variable speed drives
Product type designation			VLB3
General characteristics			
Rated power supply voltage			400...480VAC 50/60Hz
Rated output voltage		VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current		A	1.3
Rated output power		kW	0.4
Rated output power		HP	0.5 (heavy load)
EMC filter			Built-in EMC suppressor cat. C1/C2
Communication port			RS485, Modbus- RTU
Technical features			
Input type			Three-phase
Rated mains voltage		VAC	400...480
Operating mains voltage range		VAC	340...528
Rated mains frequency		Hz	50/60
Operating mains frequency range		Hz	45...65
Rated mains current without mains choke			1.8
Rated mains current with mains choke			1.4
Output type			Three-phase
Output voltage range		VAC	0...480
Output frequency range		Hz	0...599
Current overload		%/s	150% for 60s; 200% for 3s
Apparent output power			0.9 (heavy load)
Power loss			4kHz: 20W (heavy load)
Brake chopper			Yes
Switching frequency			2...16kHz
Max motor cable length			
Shielded		Without EMC category	m 15
		Category C1	m 3
		Category C2	m 15
		Category C3	m 15
Unshielded			
		Without EMC category	m 30

Functions

Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer
3-wire control	Yes
S-shape curves	Yes
Slip compensation	Yes
Flying restart	Yes
Access to DC bus	Yes
DC braking	Yes
DC injection at start	Yes
PID control	Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)	Yes
Preset speeds	Yes
Motorpotentiometer	Yes
Different parameter configuration sets	Yes
Parameters changeover function	Yes
Favorite parameters menu	Yes
Autotuning	No
Safe torque Off (STO) safety function	Optional
PTC probe input	Yes


Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse		
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)		
Input and Output			
Number of digital input	Nr.	5	
Digital input type		Selectable PNP or NPN logic	
Number of digital output	Nr.	2	
Digital output arrangement		1 relay output with changeover contact (C/O-SPDT) + 1 digital output	
Output contacts ratings		Relay output: 3A 250VAC Digital output: 100mA max 30VDC	
Number of analog input	Nr.	2	
Analog input type		Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA	
Number of analog output	Nr.	1	
Analog output type		configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA	
Ambient conditions			
Temperature	Operating temperature		
	min	°C	-10
	max	°C	+55
	Current derating		2.5%/°C over 45°C
	Storage temperature		
	min	°C	-25
	max	°C	+60
Relative humidity		%	5...95% (with no condensing)

Max altitude	m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree		2
Overvoltage category		III up to 2000m altitude (II above 2000m)


Housing

Installation position		Vertical
IP degree of protection		IP20
Dimensions (W x H x D)	mm	60 x 214 x 130
Weight	Kg	0.85

Dimensions

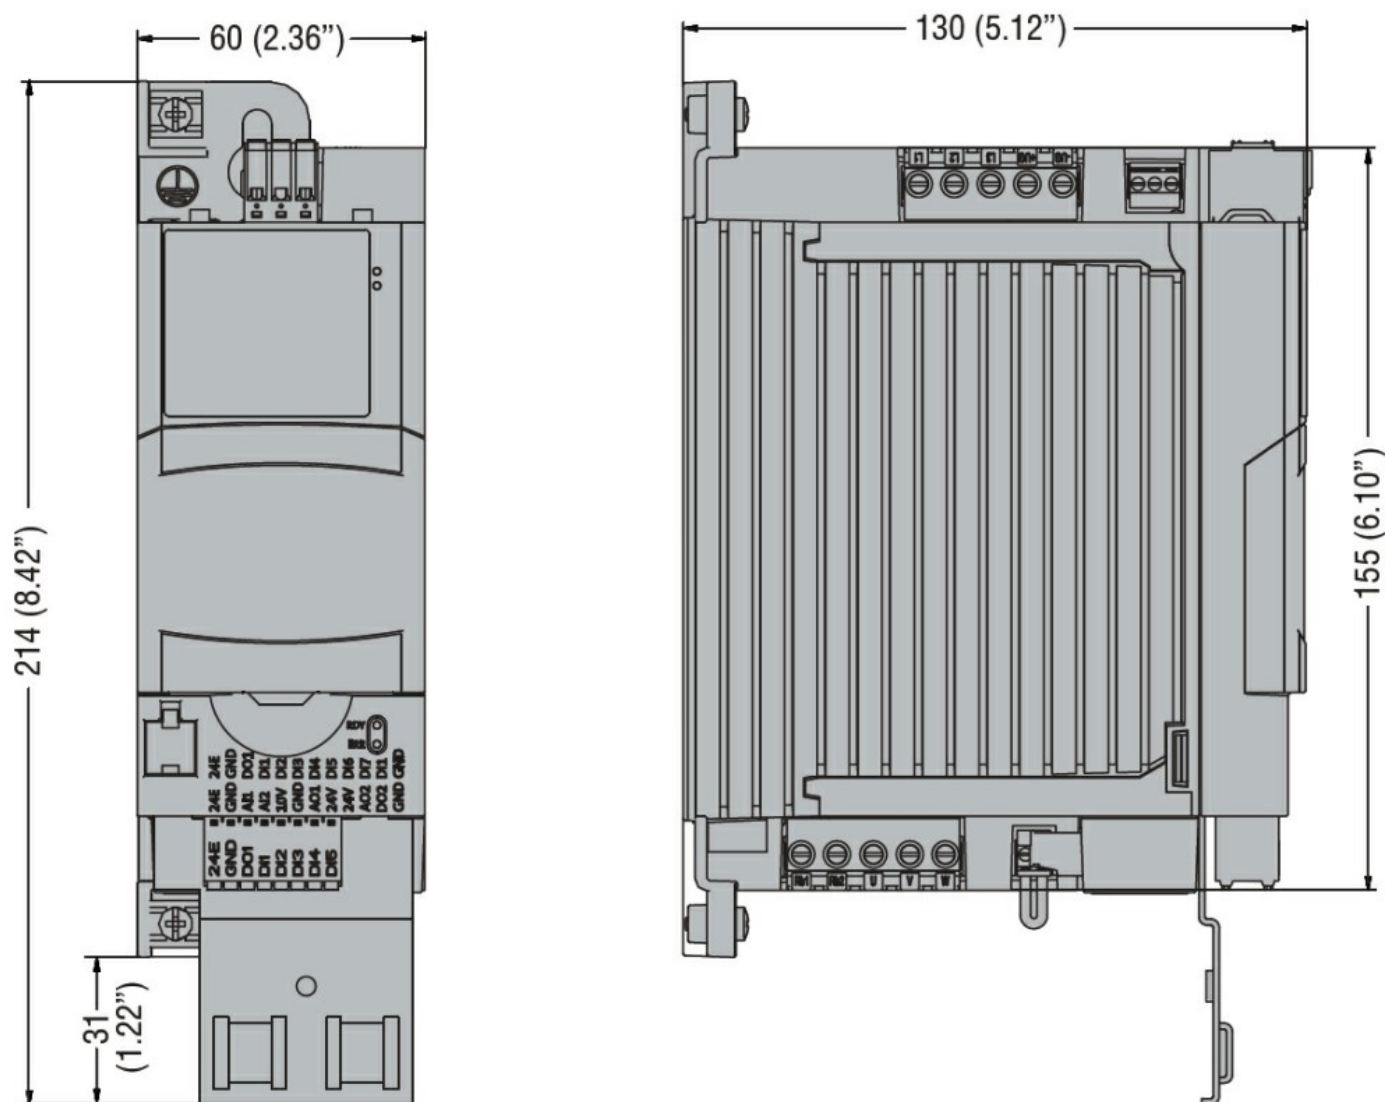

Wiring diagrams

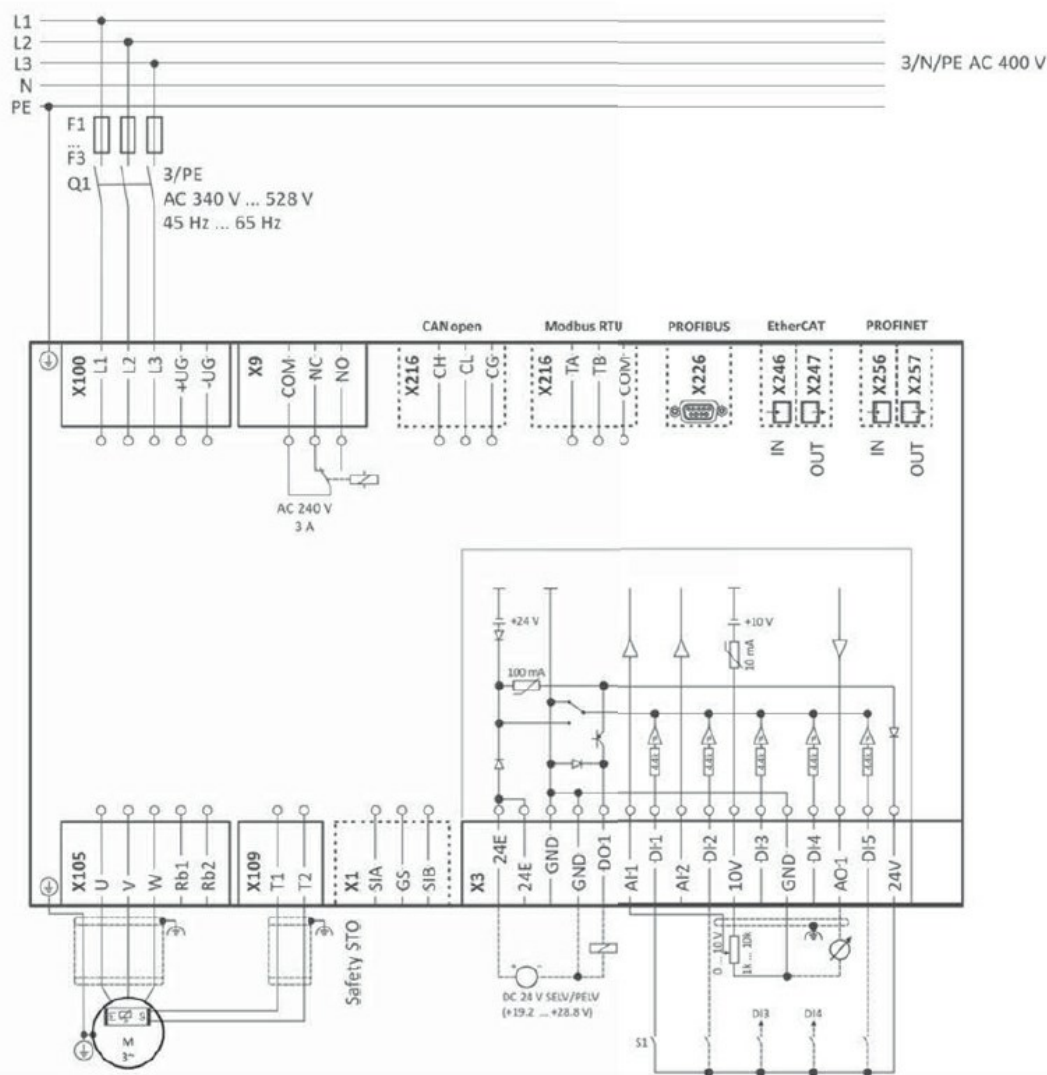

Certifications and compliance

Compliance

CSA 22.2 n°274

EN 61800-5-1

UL61800-5-1

Certificates

CSA

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC001857 -
Frequency
converter ≤ 1 kV