


### SOFT STARTER, ADXNB... TYPE, BASIC VERSION, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC, 25A



Product designation			Soft starter basic
Product type designation			ADXNB
Motor type			Asynchronous three phase
Electrical features			tinee pridee
Supplies voltage			
	Type of system		Three phase
	Rated supply voltage	V	208600VAC
ä	auxiliary supply voltage (Us)		24VAC/DC
	Rated frequency	Hz	50/60
Rated starter current le	· · · · ·	Α	25
Rated motor power			
IEC ratings (T≤40°C)			
	230VAC	kW	5.5
	400VAC	kW	11
	500VAC	KW	15
UL ratings (T≤40°C)			
	220-240VAC	HP	7.5
	380-415VAC	HP	10
	440-480VAC	HP	15
	550-600VAC	HP	20
Number of controlled phases		Nr.	2
Built-in bypass			Yes
Cooling System			Natural or forced (optional)
Rated insulation voltage Ui		V	600
Programming interface			
			Settings: starting voltage, acceleration
Potentiometer			ramp,
			deceleration
			ramp
Display			No
Programming with NFC technology			No
Optical port			No
Startup and stop settings			
Startup method			Voltage ramp
Stop method			Voltage ramp or free-wheel stop
Acceleration ramp		S	1-20
Deceleration ramp		S	0-20
Startup voltage		%	30-80
Protections			



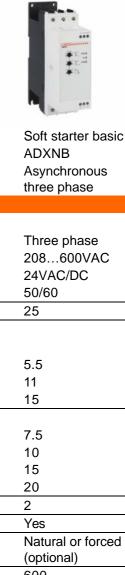

SOFT STARTER, ADXNB... TYPE, BASIC VERSION, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC, 25A

Power supply Protection  Starter protection			No power line, phase loss, frequency out of limits, phase sequence (configurable) Overtemperature
Functions			Overtemperature
Built-in bypass			2
Built-in display and keypad			Yes
Languages			No
View measurements			No
Torque control			No
Adjustable current limit			No
Dynamic braking			No
Kick Start function			No
Motor overload electronic protection			No
Motor protection PTC input			No
Protection against phase loss			No
Protection against phase inversion			Yes
Protection against locked rotor			Yes
Protection against thyristor overtemperature			No No
Protection against trynstor overtemperature  Protection against low load			Yes
Programmable alarm			No
Digital inputs			No
			Yes
Analog inputs Digital outputs			No No
			Yes
Analog output  Manitoring communication			No No
Monitoring communication Optical port for programming			Optional
Event log			No
Motor hour counter			No
			No
Startup counter Clock calendar			No
			No
Remote external keypad			No
Plug-in version Input and Output			INO
Digital inputs			
Digital inputs	Number of digital input	Nr.	1
	Digital input type	INI.	Volt-free contact
	Digital input functions		Motor start
Digital outputs	Digital input functions		Wotor start
Digital outputs	Number of digital output	Nr.	2
	Number of digital output	INI.	2 NO contacts
D	igital output arrangement		with the same common, 5A 250VAC AC1 - 5A 30 VDC
	Digital output functions		Line contactor (Run), TOR (Top Of Ramp)
Communication interfaces			
Communication interface			No
Ambient conditions			






SOFT STARTER, ADXNB... TYPE, BASIC VERSION, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC, 25A

#### Temperature

Operating temperature			
	min	°C	-20
			+60°C (with
	max	°C	current derating
			>40°C)
Storage temperature			
	min	°C	-30
	max	°C	+80
			1000 without
Max altitude		m	derating of the
			starter current
Relative humidity		%	<80%
Pollution degree			2
Installation category			III
Housing			
			Screw-fixing or
Mounting			35mm DIN rail
Wounting			(IEC/EN/BS
			60715)
IP degree of protection			IP20
Dimensions (W x H x D)		mm	45 x 159 x 128.4
Weight		Kg	0.63

#### **Dimensions**

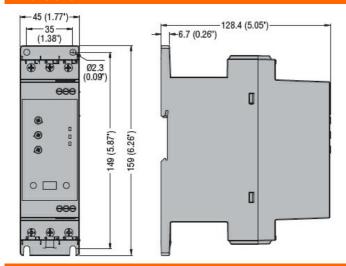

# Certifications and compliance

$\sim$			
1 · ^	mp	เเวท	$\sim$
$\sim$	שווו	II a I	いして

CSA C22.2 n° 60947-4-2 IEC/EN/BS 60947-1 IEC/EN/BS 60947-4-2 UL 60947-4-2

# Certificates

cULus EAC RCM (pending)

### ETIM classification

**ETIM 8.0** 

EC000640 - Soft starter