VOLTAGE MONITORING REALY FOR THREE-PHASE SYSTEM, WITHOUT NEUTRAL, PHASE LOSS AND INCORRECT PHASE SEQUENCE, 208...575VAC 50/60HZ

| | | | The same of the sa |
|---|------------|----------------|--|
| | | | On the comments of the comme |
| | | | |
| | | | Voltage |
| Product designation | | | monitoring relays |
| Product type designation | | | PMV20 |
| General characteristics | | | |
| | | | Phase loss and |
| Description | | | incorrect phase |
| | | | sequence relay |
| Type of system | | | Three-phase |
| | | | without neutral |
| Power supply | | | O a lé manus mand |
| Auxiliary supply voltage Us | | | Self powered |
| Operating voltage range | | | 0.851.1 Ue |
| Rated frequency | | Hz | 50/60 ±5% |
| Power consumption Max | | VA | 28 |
| Power dissipation Max | | W | 2.5 |
| Control circut | | | |
| Rated voltage to control (Ue) | | | |
| | min | VAC | 208 |
| | Max | VAC | 575 |
| Tripping delay | | S | 0.06 |
| Resetting time | | S | 0.5 |
| Resetting hysteresis | | % | 5 |
| Instantaneous tripping for Ue | | | Voltage <70% Ue |
| Type of reset | | | Automatic |
| Repeat accuracy | | % | <±1 |
| Tripping time for phase loss | | ms | 60 |
| Relay outputs | | NI. | 4 |
| Number of relays | | Nr. | 1 |
| | | | Normally |
| Relay state | | | energised De- energises at |
| | | | tripping |
| | | | 1 changeover |
| Contact arrangement | | | SPDT |
| Rated operational voltage AC (IEC) | | VAC | 250 |
| Maximum switching voltage | | VAC | 400 |
| IEC Conventional free air thermal current Ith | | Α | 8 |
| UL/CSA and IEC/EN 60947-5-1 designation | | | B300 |
| Electrical life (with rated load) | | cycles | 100000 |
| Mechanical life | | cycles | 3000000 |
| Functions | | | |
| Modular version | | | 2U |
| Minimum AC voltage | | | No |
| Maximum AC voltage | | | No |
| Phase loss | | | Yes |
| Incorrect phase sequence | | | Yes |
| The characteristics described in this document are subject to updates or modifications at any time. The d | escription | s. technical a | nd . |


ENERGY AND AUTOMATION

VOLTAGE MONITORING REALY FOR THREE-PHASE SYSTEM, WITHOUT NEUTRAL, PHASE LOSS AND INCORRECT PHASE SEQUENCE, 208...575VAC 50/60HZ


| metry ations ation ections inals type ening torque for terminals | max max | Nm Ibin | 1 green LED for power on and tripping Screw 0.8 |
|--|------------|------------|---|
| ections nals type | | | power on and tripping Screw |
| nals type | | | |
| | | | |
| ening torque for terminals | | | 0.8 |
| | | | Λ 8 |
| | max | lbin | |
| | | | 7 |
| uctor cross section | | | |
| AWG/Kcmil | | | |
| | min | AWG | 24 |
| | Max | AWG | 12 |
| IEC | | | |
| | min | mm² | 0.2 |
| | Max | mm² | 4 |
| ations | | | |
| I insulation voltage Ui | | V | 600 |
| I impulse withstand voltage Uimp | | kV | 6 |
| ating frequency withstand voltage | | kV | 4 |
| ent conditions | | | |
| erature | | | |
| Operating temperature | | | |
| operating temperature | min | °C | -20 |
| | max | °C | +60 |
| Storage temperature | max | | |
| Otorago temperaturo | min | °C | -30 |
| | max | °C | +80 |
| ing | Пах | U | 100 |
| ution (n° of modules) | | | 2 |
| mon (n. or modules) | | | Self-extinguishing |
| ial | | | polyamide |
| ting | | | 35mm DIN rail (IEC/EN 60715) |
| legree of protection | | | IP40 on front; IP20 at terminals |
| nsions (W x H x D) | | mm | 35.8 x 104.7 x 64.9 |
| nt | | g | 120 |
| nsions | | | |

ENERGY AND AUTOMATION

VOLTAGE MONITORING REALY FOR THREE-PHASE SYSTEM, WITHOUT NEUTRAL, PHASE LOSS AND INCORRECT PHASE SEQUENCE, 208...575VAC 50/60HZ

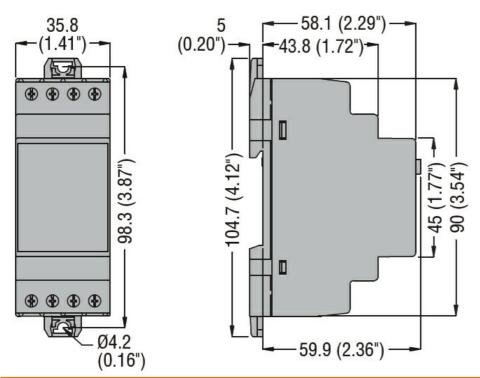

Wiring diagrams

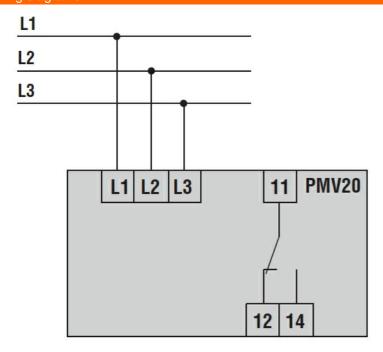

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL 508

Certificates

cULus

EAC





VOLTAGE MONITORING REALY FOR THREE-PHASE SYSTEM, WITHOUT NEUTRAL, PHASE LOSS AND INCORRECT PHASE SEQUENCE, 208...575VAC 50/60HZ

ETIM classification

ETIM 8.0

EC001438 -Voltage monitoring relay