


8LT4K06BG STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED, 24VDC




Product designation			Signal tower Ø45mm/1.7"
Product type designation			8TL4
General characteristi	cs		
Diameter		mm - i	nch 45 / 1.77
Supply voltage (DC)		V	24±10%
Colour			Green, blue, orange, red
IEC degree of protect	ction		IP54
Light consumption per module (DC)		mA	37
Mechanical features			
Tightening torque for terminals max		Nm	0.5
Terminals screw			Screw clamp terminals
Conductor section			
	AWG/Kcmil		
		max	16
	IEC		
		max mm	² 1.5
Weight		g	320
Ambient conditions			
Temperature			
	Operating temperature		
		min °C	-20
		max °C	+50
Dimensions			

8LT4K06BG



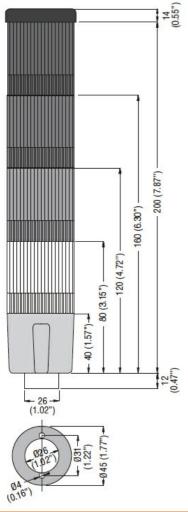

Wiring diagrams

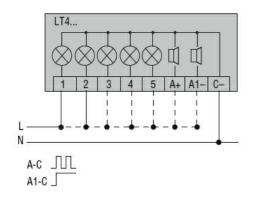

Certifications and compliance

Compliance	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC
ETIM classification	

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

8LT4K06BG



STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED, 24VDC

ETIM 8.0

EC001042 -Signal tower complete