





## STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED WITH CONTINUOUS OR PULSED SOUND, 24VDC

Product designation				Signal tower Ø45mm/1.7"
Product type designation			8TL4	
General characteristics				
Diameter		r	nm - inch	45 / 1.77
Supply voltage (DC)			V	24±10%
Colour				Green, blue, orange, red
IEC degree of protection	on			IP54
Light consumption per			mA	37
Sound module consumption (DC)			mΑ	15
Sound intensity			dB	80
Mechanical features				
Tightening torque for terminals max			Nm	0.5
Terminals screw				Screw clamp terminals
Conductor section				
	AWG/Kcmil			4.0
	150	max		16
	IEC	max	mm²	1.5
Weight			g	400
Ambient conditions				
Temperature				
	Operating temperature			
		min max	°C	-20 +50
Dimensions		111007	<u> </u>	

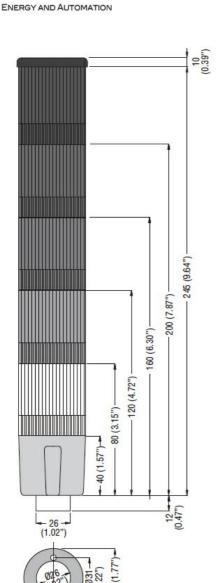

## Wiring diagrams

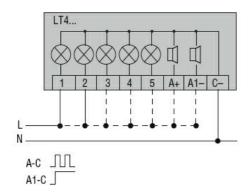

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

**UL508** 



**ENERGY AND AUTOMATION** 

## **8LT4K07BG**

STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED WITH CONTINUOUS OR PULSED SOUND, 24VDC

Certificates			
	cULus		
	EAC		
ETIM classification			

ETIM 8.0

EC001042 -Signal tower complete