




Product designation


Signal tower Ø70mm/2.75" 8TL7FL - Light mudules

Product type designation


| General characteristics | | |
|-----------------------------------|-----------|-----------|
| Diameter | mm - inch | 70 / 2.75 |
| Supply voltage (AC) | V | 24 |
| Supply voltage (DC) | V | 24 |
| Colour | | Yellow |
| IEC degree of protection | | IP65 |
| Light consumption per module (AC) | mA | 135 |
| Light consumption per module (DC) | mA | 75 |
| Sound module consumption (AC) | mA | 135 |
| Sound module consumption (DC) | mA | 75 |
| Mechanical features | | |
| Weight | g | 92 |
| Ambient conditions | | |
| Temperature | | |
| Operating temperature | | |
| | min °C | -20 |
| | max °C | +50 |
| Dimensions | | |



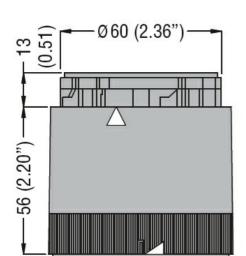



Wiring diagrams

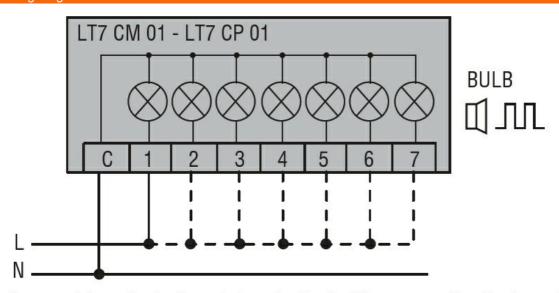

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14



8LT7FLB5

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, YELLOW, 24VAC/DC

| | IEC/EN 60947-1 |
|-------------------------------|------------------|
| | IEC/EN 60947-5-1 |
| | UL508 |
| Certificates | |
| | cULus |
| | EAC |
| ETIMA distance (Constitution) | |

ETIM classification

ETIM 8.0

EC000232 -Optical module for signal tower