



Product designation  
Product type designation  
Motor type

Soft starter basic  
ADXNB  
Asynchronous  
three phase

### Electrical features

Supplies voltage

Type of system	Three phase
Rated supply voltage	208...600VAC
auxiliary supply voltage (Us)	24VAC/DC
Rated frequency	50/60

Rated starter current Ie	A	30
--------------------------	---	----

Rated motor power

IEC ratings (T≤40°C)

230VAC	kW	7.5
400VAC	kW	15
500VAC	KW	18.5

UL ratings (T≤40°C)

220-240VAC	HP	10
380-415VAC	HP	15
440-480VAC	HP	20
550-600VAC	HP	25

Number of controlled phases	Nr.	2
-----------------------------	-----	---

Built-in bypass	Yes
-----------------	-----

Cooling System	Natural or forced (optional)
----------------	------------------------------

Rated insulation voltage Ui	V	600
-----------------------------	---	-----

### Programming interface

Potentiometer	Settings: starting voltage, acceleration ramp, deceleration ramp
---------------	--

Display	No
---------	----

Programming with NFC technology	No
---------------------------------	----

Optical port	No
--------------	----

### Startup and stop settings

Startup method	Voltage ramp
----------------	--------------

Stop method	Voltage ramp or free-wheel stop
-------------	---------------------------------

Acceleration ramp	s	1-20
-------------------	---	------

Deceleration ramp	s	0-20
-------------------	---	------

Startup voltage	%	30-80
-----------------	---	-------

### Protections

Power supply Protection

No power line,  
phase loss,  
frequency out of  
limits, phase  
sequence  
(configurable)

Starter protection Overtemperature

**Functions**

Built-in bypass	2
Built-in display and keypad	Yes
Languages	No
View measurements	No
Torque control	No
Adjustable current limit	No
Dynamic braking	No
Kick Start function	No
Motor overload electronic protection	No
Motor protection PTC input	No
Protection against phase loss	No
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	No
Protection against low load	Yes
Programmable alarm	No
Digital inputs	No
Analog inputs	Yes
Digital outputs	No
Analog output	Yes
Monitoring communication	No
Optical port for programming	Optional
Event log	No
Motor hour counter	No
Startup counter	No
Clock calendar	No
Remote external keypad	No
Plug-in version	No

**Input and Output**

Digital inputs	Number of digital input	Nr.	1
	Digital input type		Volt-free contact
	Digital input functions		Motor start
Digital outputs	Number of digital output	Nr.	2
	Digital output arrangement		2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC
	Digital output functions		Line contactor (Run), TOR (Top Of Ramp)

**Communication interfaces**

Communication interface No

**Ambient conditions**

## Temperature

### Operating temperature

min	°C	-20
max	°C	+60°C (with current derating >40°C)

### Storage temperature

min	°C	-30
max	°C	+80

## Max altitude

m 1000 without  
derating of the  
starter current

## Relative humidity

% <80%

## Pollution degree

2

## Installation category

III

## Housing

## Mounting

Screw-fixing or  
35mm DIN rail  
(IEC/EN/BS  
60715)

## IP degree of protection

IP20


## Dimensions (W x H x D)

mm 45 x 159 x 128.4

## Weight

Kg 0.63

## Dimensions

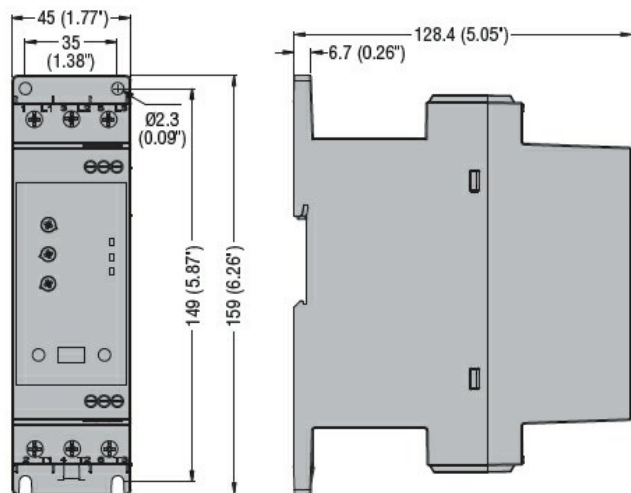

## Certifications and compliance

### Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-2

UL 60947-4-2

### Certificates

cULus

EAC

RCM (pending)

## ETIM classification

### ETIM 8.0

EC000640 - Soft  
starter