



				24 cont
Product designation				Soft Starter
Product type designat	ion			ADXL
Motor type				Asynchronous three phase
Electrical features				tinos pridos
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208600VAC
		auxiliary supply voltage (Us)		100240VAC
		Rated frequency	Hz	50/60
Rated starter current le			Α	45
Rated motor power	(T (40°C)			
	IEC ratings (T≤40°C)	0001/40	1-147	44
		230VAC	kW	11
		400VAC 500VAC	kW KW	22 30
	UL ratings (T≤40°C)	SOUVAC	T V V	30
	OL fattings (1340 C)	220-240VAC	HP	15
		380-415VAC	HP	25
		440-480VAC	HP	30
		550-600VAC	HP	40
Number of controlled	phases	300 000 7710	Nr.	2
Built-in bypass				Yes
				Natural or forced
Cooling System				(optional)
Rated insulation voltage Ui			V	600
Programming interface	Э			
Display				Backlit icon LCD
-				display
Programming with NF	C technology			Yes
Optical port				Yes
Startup and stop settir	ngs			
				Torque ramp with
				current limit,
Startup method				Voltage ramp with current limit,
				Constant torque
				with current limit
				Torque ramp,
Stop method				voltage ramp,
· 				free-wheel stop
Protections				
Auxiliary supply protect	ction			Voltage too low





## SOFTSTARTÉR 45A, 22KW/400V, BY-PASS STYKAČ, OVLÁDACÍ NAPĚTÍ 208-600VAC

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run),
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request
Functions	
Built-in bypass	2
Built-in display and keypad	Yes
Languages	Yes
View measurements	6
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	
ICAL OCCUPATION	Yes
Kick Start function	No
Motor overload electronic protection	No Yes
Motor overload electronic protection  Motor protection PTC input	No Yes Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss	No Yes Yes Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion	No Yes Yes Yes Yes Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor	No Yes Yes Yes Yes Yes Yes Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature	No Yes Yes Yes Yes Yes Yes Yes Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load	No Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm	No Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs	No Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs	No Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs	No Yes
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs  Analog output	No
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs	No
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs  Analog output  Monitoring communication	No           Yes           Yes           Yes           Yes           Yes           Yes           Yes           Yes           Yes           No           Yes           No           Yes           No
Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs  Analog output  Monitoring communication  Optical port for programming	No







## SOFTSTARTÉR 45A, 22KW/400V, BY-PASS STYKAČ, OVLÁDACÍ NAPĚTÍ 208-600VAC

Clock calendar			Yes
Remote external keypad			No
Plug-in version			Optional
Input and Output			
Digital inputs			
	Number of digital input	Nr.	3
			2 input with dry contact + 1 input
	Digital input type		with dry contact
	gapat .j,pa		or PTC
			(configurable)
			Programmable
			(motor start,
			motor stop, freewheel stop,
			motor preheating,
	Digital input functions		commands lock,
	Digital input functions		alarms inhibition,
			thermal status
			reset, keyboard lock, motor
			selection, user
			alarm, command)
Digital outputs			
	Number of digital output	Nr.	3
			2 x 1 NO (SPST)
			+ 1 C/O (SPDT) Ratings: 2 x 1NO
			contacts: 3A
			250VAC - 3A
	Digital autout averagement		30VDC 1 x C/O
	Digital output arrangement		contact: NO contact 5A
			250VAC - 5A
			30VDC; NC
			contact 3A
			250VAC - 3A 30VDC
			Programmable
			(line contactor,
			run, global alarm,
	Digital output functions		limits, remote
			variable, alarm
			Axx, user alarm Axx, OFF)
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
			+60°C (with
	max	°C	current derating >40°C of 0.5%/
			°C)
Storage temperature			<del>-</del> ,
2.2.2.52	min	°C	-30
	max	°C	+80



Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		III
Housing		
		Screw-fixing or
Mounting		35mm DIN rail with optional accessory EXP8003
Mounting  IP degree of protection		with optional accessory
	mm	with optional accessory EXP8003
IP degree of protection	mm Kg	with optional accessory EXP8003 IP00

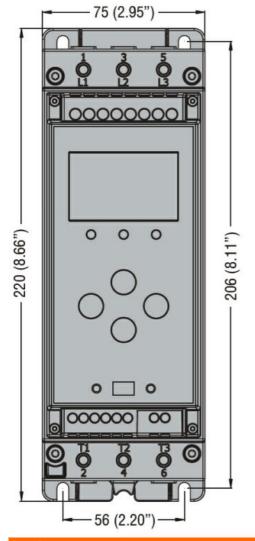

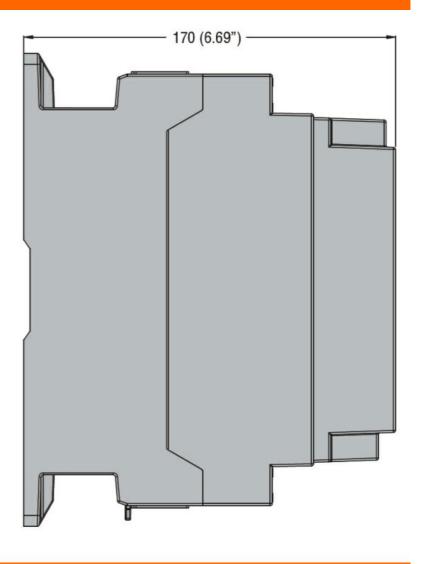

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2



## ADXL0045600

SOFTSTARTÉR 45A, 22KW/400V, BY-PASS STYKAČ, OVLÁDACÍ NAPĚTÍ 208-600VAC

	UL508	
Certificates		
	cULus	
	EAC	
	RCM	
ETIM classification		
ETIM 8.0		EC000640 - Soft starter