



				111
Product designation Product type designation	ion			Soft Starter ADXL
Motor type				Asynchronous three phase
Electrical features				
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208600VAC
		auxiliary supply voltage (Us)		100240VAC
		Rated frequency	Hz	50/60
Rated starter current le			Α	162
Rated motor power				
	IEC ratings (T≤40°C)			
		230VAC	kW	45
		400VAC	kW	90
		500VAC	KW	110
	UL ratings (T≤40°C)	000 040440		•
		220-240VAC	HP	60
		380-415VAC	HP	75 405
		440-480VAC	HP	125
Ni. and an of a surfuelle d		550-600VAC	HP	150
Number of controlled phases			Nr.	Yes
Built-in bypass				Forced
Cooling System	40 I Ii		V	
Rated insulation voltage			V	600
Programming interface	<del>d</del>			Backlit icon LCD
Display				display
Programming with NF0	C technology			Yes
Optical port				Yes
Startup and stop setting	nas			. 00
	.9-			Torque ramp with
				current limit,
Startup method				Voltage ramp with
Otartap metrioa				current limit,
				Constant torque
				with current limit
Stan mathad				Torque ramp,
Stop method				voltage ramp, free-wheel stop
Protections				Hee-Mileel Stob
A	dia.a			Valtage too lev


Voltage too low

Auxiliary supply protection



**ENERGY AND AUTOMATION** 

	No power, phase loss, phase sequence,
Power supply Protection	frequency out of
	limits, minimum
	and maximum
	voltage
	Overload at
	starting (trip class 2, 10A, 10, 15,
	20, 25, 30, 35
	and 40), overload
	during running
Motor protection	(trip class 2, 10A,
	10, 15, 20, 25
	and 30), locked rotor, current
	asymmetry,
	minimum torque
	(dry run),
	Overcurrent,
	overtemperature,
	bypass failure,
Starter protection	phase shorted, temperature
Starter protection	sensor fault,
	cooling fan fault,
	maintenance
	request
Functions	•
Built-in bypass	2
Built-in display and keypad	Yes
Languages	Yes
View measurements Torque control	6
Torque control Adjustable current limit	
· ·	Yes
Dynamic broking	Yes
Dynamic braking Kick Start function	Yes Yes
Kick Start function	Yes Yes No
Kick Start function  Motor overload electronic protection	Yes Yes No Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input	Yes Yes No Yes Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss	Yes Yes No Yes Yes Yes Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion	Yes Yes No Yes Yes Yes Yes Yes Yes Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor	Yes Yes No Yes Yes Yes Yes Yes Yes Yes Yes Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature	Yes Yes No No Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load	Yes Yes No Yes Yes Yes Yes Yes Yes Yes Yes Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm	Yes Yes No Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs	Yes Yes No Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm	Yes Yes No Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs	Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs	Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs  Analog output	Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs  Analog output  Monitoring communication	Yes
Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion  Protection against locked rotor  Protection against thyristor overtemperature  Protection against low load  Programmable alarm  Digital inputs  Analog inputs  Digital outputs  Analog output  Monitoring communication  Optical port for programming	Yes







**ENERGY AND AUTOMATION** 

Clock calendar Yes Remote external keypad No Plug-in version Optional Input and Output Digital inputs Number of digital input Nr. 3 2 input with dry contact + 1 input Digital input type with dry contact or PTC (configurable) Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, Digital input functions alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command) Digital outputs 3 Number of digital output Nr. 2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O Digital output arrangement contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC Programmable (line contactor, run, global alarm, Digital output functions limits, remote variable, alarm

#### Ambient conditions

Temperature

Operating temperature

Storage temperature

min °C -20
+60°C (with
current derating
>40°C of 0.5%/
°C )

min °C -30

+80

°C


max


Axx, user alarm Axx, OFF)



Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		III
Housing		
Mounting		Screw-fixing
IP degree of protection		IP00
Dimensions (W x H x D)	mm	212 x 301 x 216
Weight	Kg	7.8

#### **Dimensions**

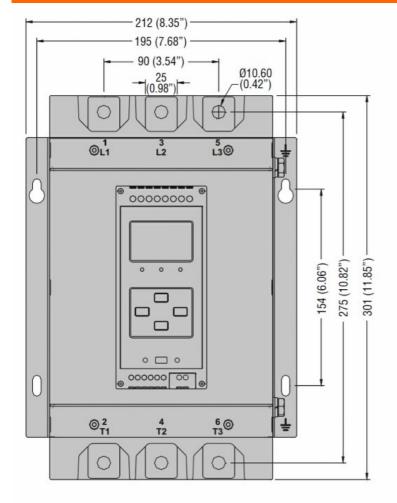

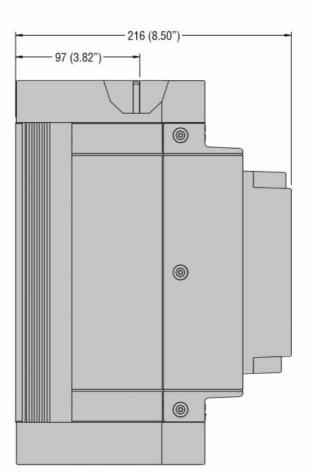

# Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508

Certificates

cULus

EAC

RCM

### ETIM classification





## SOFT-MOTORSTARTER MIT INTERGRIERTEM BYPASS-RELAIS 162A 600V

ETIM 8.0

EC000640 - Soft starter