





Product designation			Variable speed drives
Product type designation			VLB3
General characteristics			
Rated power supply voltage			400...480VAC 50/60Hz
Rated output voltage		VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current		A	23.5
Rated output power		kW	11
Rated output power		HP	15 (Heavy load) / 20 (Standard load)
EMC filter			Built-in EMC suppressor cat. C2
Communication port			RS485, Modbus- RTU
Technical features			
Input type			Three-phase
Rated mains voltage		VAC	400...480
Operating mains voltage range		VAC	340...528
Rated mains frequency		Hz	50/60
Operating mains frequency range		Hz	45...65
Rated mains current without mains choke			28.4 (heavy load)
Rated mains current with mains choke			22.3 (heavy load) / 27.1 (standard load)
Output type			Three-phase
Output voltage range		VAC	0...480
Output frequency range		Hz	0...599
Current overload		%/s	150% for 60s; 200% for 3s
Apparent output power			16 (heavy load) / 19 (standard load)
Power loss			4kHz: 260W (heavy load) / 309 (standard load)
Brake chopper			Yes
Switching frequency			2...16kHz
Max motor cable length			
Shielded		Without EMC category	m 100
		Category C1	m 3
		Category C2	m 20


	Category C3	m	50
Unshielded			
	Without EMC category	m	200
<b>Functions</b>			
Motor control modes			V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless
Speed reference signals			External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer
3-wire control			Yes
S-shape curves			Yes
Slip compensation			Yes
Flying restart			Yes
Access to DC bus			Yes
DC braking			Yes
DC injection at start			Yes
PID control			Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)			Yes
Preset speeds			Yes
Motorpotentiometer			Yes
Different parameter configuration sets			Yes
Parameters changeover function			Yes
Favorite parameters menu			Yes
Autotuning			No
Safe torque Off (STO) safety function			Optional
PTC probe input			Yes

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse		
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)		
Input and Output			
Number of digital input	Nr.	5	
Digital input type	Selectable PNP or NPN logic		
Number of digital output	Nr.	2	
Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output		
Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC		
Number of analog input	Nr.	2	
Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA		
Number of analog output	Nr.	1	
Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA		
Ambient conditions			
Temperature	Operating temperature		
	min	°C	-10
	max	°C	+55

		Current derating		switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C
Storage temperature		min	°C	-25
		max	°C	+60
Relative humidity			%	5...95% (with no condensing)
Max altitude			m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree				2
Overvoltage category				III up to 2000m altitude (II above 2000m)
<b>Housing</b>				
Installation position				Vertical
IP degree of protection				IP20
Dimensions (W x H x D)			mm	120 x 305 x 130
Weight			Kg	3.95
<b>Dimensions</b>				

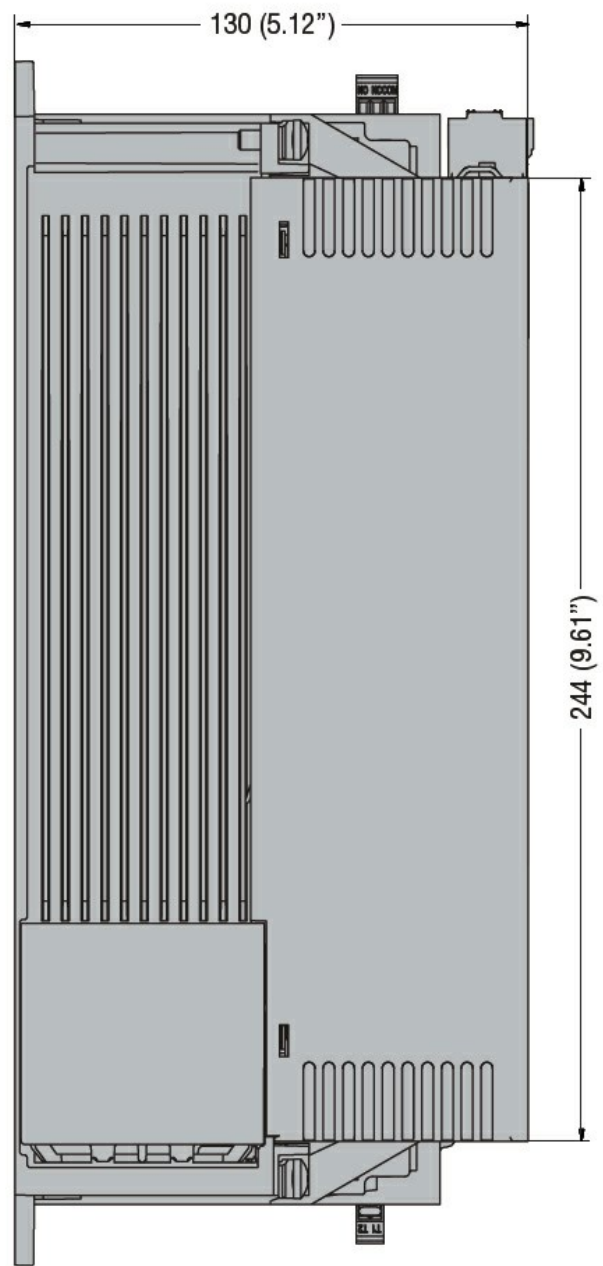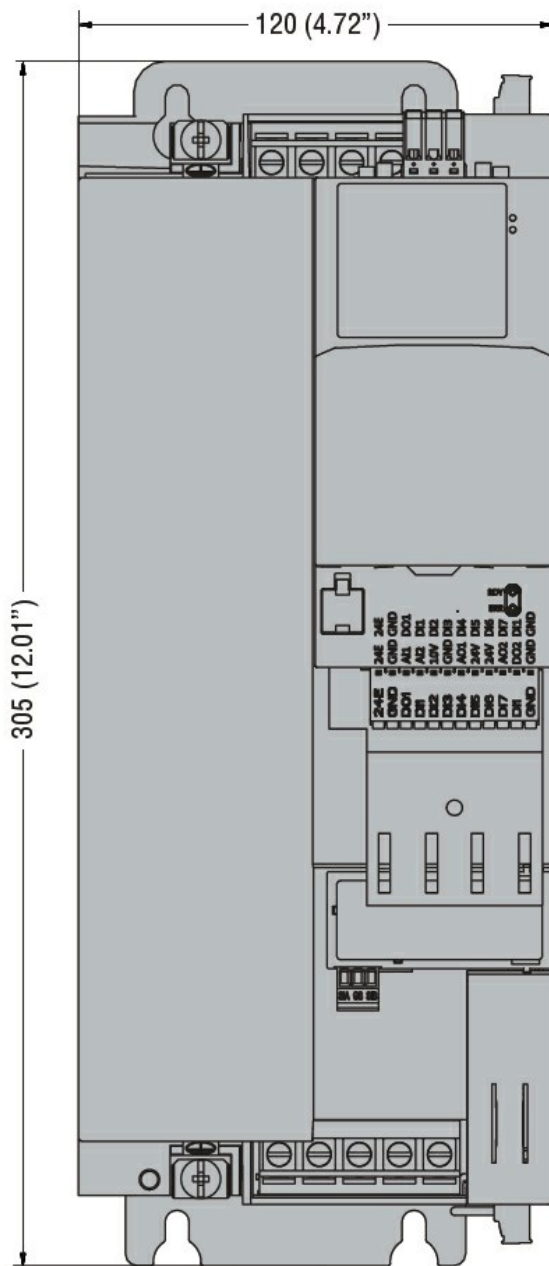

## Wiring diagrams

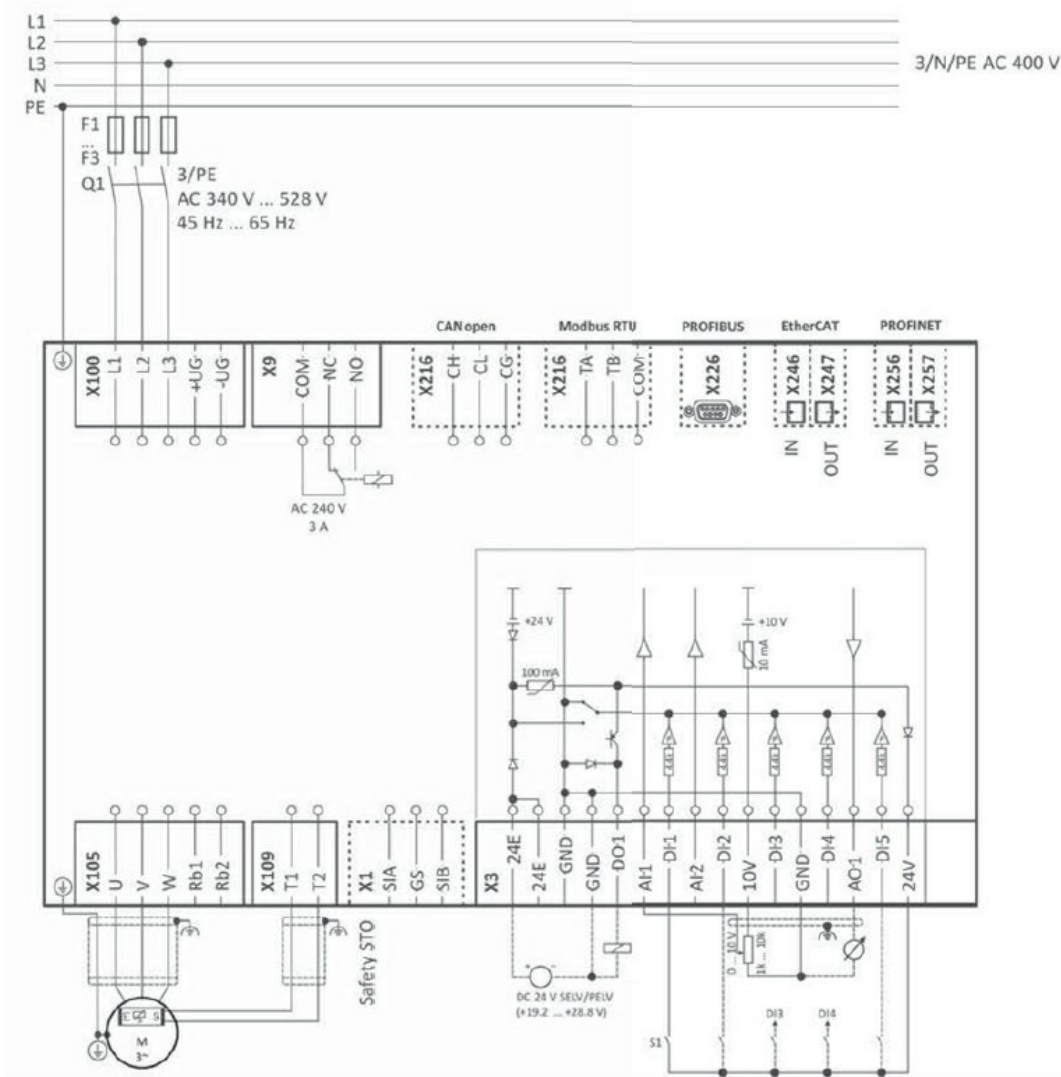

## Certifications and compliance

## Compliance

CSA 22.2 n°274

EN 61800-5-1

UL61800-5-1

## Certificates

CSA

---

cULus

EAC

RCM

## ETIM classification

ETIM 8.0

EC001857 -  
Frequency  
converter  $\leq 1$  kV