



Product designation Product type designation	on			Soft Starter ADXL
Motor type				Asynchronous three phase
Electrical features				under pridee
Supplies voltage				
		Type of system Rated supply voltage auxiliary supply voltage (Us) Rated frequency	V Hz	Three phase 208600VAC 100240VAC 50/60
Rated starter current le	9	, ,	Α	75
Rated motor power				
	IEC ratings (T≤40°C)			
		230VAC	kW	22
		400VAC	kW	37
	UL ratings (T≤40°C)	500VAC	KW	45
	OL ratings (1540 C)	220-240VAC	HP	25
		380-415VAC	HP	40
		440-480VAC	HP	50
		550-600VAC	HP	60
Number of controlled p	hases		Nr.	2
Built-in bypass				Yes
Cooling System				Natural or forced (optional)
Rated insulation voltag	e Ui		V	600
Programming interface				
Display				Backlit icon LCD display
Programming with NFC	technology			Yes
Optical port				Yes
Startup and stop settin	gs			Torque remp with
Startup method				Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
Stop method				Torque ramp, voltage ramp, free-wheel stop
Protections Auxiliary supply protections	tion			Voltage too low





Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run),
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request
Functions	
Built-in bypass	2
Built-in display and keypad	Yes
Languages	Yes
View measurements	6
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Dynamic braking Kick Start function	Yes No
Dynamic braking Kick Start function Motor overload electronic protection	Yes No Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input	Yes No Yes Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss	Yes No Yes Yes Yes Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion	Yes No Yes Yes Yes Yes Yes Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor	Yes No Yes Yes Yes Yes Yes Yes Yes Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature	Yes No Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	Yes No Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	Yes No Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs	Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output	Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming	Yes
Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	Yes






Clock calendar				Yes
Remote external keypa	ad			No
Plug-in version				Optional
Input and Output				
Digital inputs		No. of Particles of	N.1.	0
		Number of digital input	Nr.	3
				2 input with dry contact + 1 input
		Digital input type		with dry contact
				or PTC
				(configurable)
				Programmable (motor start,
				motor stop,
				freewheel stop,
				motor preheating
		Digital input functions		commands lock, alarms inhibition,
				thermal status
				reset, keyboard
				lock, motor selection, user
				alarm, command)
Digital outputs				
		Number of digital output	Nr.	3
				2 x 1 NO (SPST)
				+ 1 C/O (SPDT) Ratings: 2 x 1NO
				contacts: 3A
				250VAC - 3A
		Digital output arrangement		30VDC 1 x C/O contact: NO
		Digital output arrangement		contact 5A
				250VAC - 5A
				30VDC; NC
				contact 3A
				250VAC - 3A 30VDC
				Programmable
				(line contactor,
		Division to the contract		run, global alarm,
		Digital output functions		limits, remote variable, alarm
				Axx, user alarm
				Axx, OFF)
Ambient conditions				
Temperature	Operating temperature			
	Sporacing temperature	min	°C	-20
				+60°C (with
		max	°C	current derating
			=	>40°C of 0.5%/ °C)
	Storage temperature			<u> </u>
	c.orago tomporataro	min	°C	-30
		max	°C	+80

ENERGY AND AUTOMATION

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 75A

Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		III
Housing		
Mounting		Screw-fixing or 35mm DIN rail with optional accessory EXP8003
IP degree of protection		IP00
Dimensions (W x H x D)	mm	95 x 226 x 182
Weight	Kg	2.9
Dimensions		

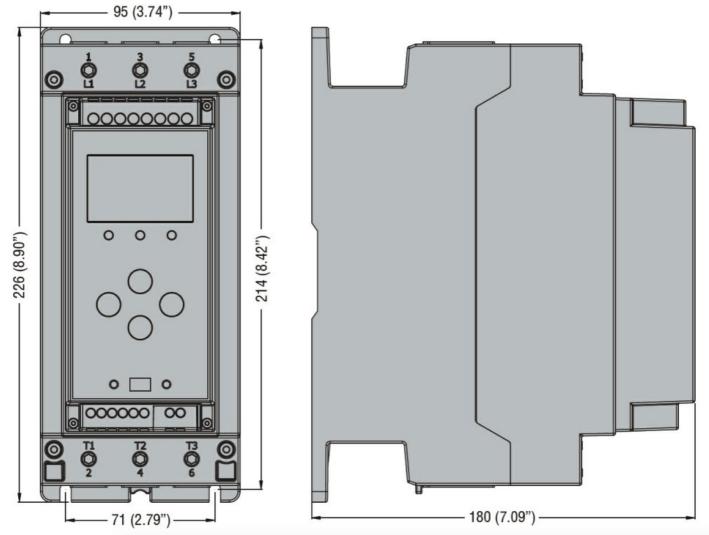

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508



ENERGY AND AUTOMATION

ADXL0075600

starter

Certificates		
	cULus	
	EAC	
	RCM	
ETIM classificat	ion	
ETIM 8.0		EC000640 - Soft