

0



## SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

Product designation				Soft Starter
Product type designation				ADXL
Motor type				Asynchronous three phase
Electrical features				
Supplies voltage		Type of system Rated supply voltage auxiliary supply voltage (Us) Rated frequency	V Hz	Three phase 208600VAC 100240VAC 50/60
Rated starter current le			Α	85
Rated motor power	· (T - 1000)			
IEC rat	ings (T≤40°C)	230VAC	kW	22
		400VAC	kW	45
		500VAC	KW	55
UL ratir	ngs (T≤40°C)			
		220-240VAC	HP	30
		380-415VAC 440-480VAC	HP HP	50 60
		550-600VAC	HP	75
Number of controlled phases		333 333 1.13	Nr.	2
Built-in bypass				Yes
Cooling System				Natural or forced (optional)
Rated insulation voltage Ui			V	600
Programming interface				D 1177
Display				Backlit icon LCD display
Programming with NFC technol	ogy			Yes
Optical port Startup and stop settings				Yes
Startup method				Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
Stop method				Torque ramp, voltage ramp, free-wheel stop
Protections Auxiliary supply protection				Voltage too low





SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

	No power, phase
	loss, phase
	sequence,
Power supply Protection	frequency out of
	limits, minimum
	and maximum
-	voltage
	Overload at
	starting (trip class 2, 10A, 10, 15,
	20, 25, 30, 35
	and 40), overload
	during running
Motor protection	(trip class 2, 10A,
·	10, 15, 20, 25
	and 30), locked
	rotor, current
	asymmetry,
	minimum torque
	(dry run),
	Overcurrent,
	overtemperature, bypass failure,
	phase shorted,
Starter protection	temperature
Ciano, protocion	sensor fault,
	cooling fan fault,
	maintenance
	request
Functions Built-in bypass	2
Built-in display and keypad	 Yes
Languages	. 55
	Yes
	Yes 6
View measurements	6
View measurements Torque control	6 Yes
View measurements Torque control Adjustable current limit	6 Yes Yes
View measurements Torque control	6 Yes
View measurements Torque control Adjustable current limit Dynamic braking	6 Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function	6 Yes Yes Yes No
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection	6 Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss	6 Yes Yes Yes No Yes Yes Yes
View measurements  Torque control  Adjustable current limit  Dynamic braking  Kick Start function  Motor overload electronic protection  Motor protection PTC input  Protection against phase loss  Protection against phase inversion	6 Yes Yes Yes No Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor	6 Yes Yes Yes No Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature	6 Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	6 Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	6 Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	6 Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	6
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs	6 Yes Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	6 Yes Yes Yes Yes No Yes
View measurements Torque control  Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output	6
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	6 Yes Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming	6 Yes Yes Yes Yes No Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log	6 Yes Yes Yes Yes No Yes





**ENERGY AND AUTOMATION** 

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

Clock calendar				Yes
Remote external keypa	ad			No
Plug-in version				Optional
Input and Output				
Digital inputs		No. of Particles of	N.1.	0
		Number of digital input	Nr.	3
				2 input with dry contact + 1 input
		Digital input type		with dry contact
				or PTC
				(configurable)
				Programmable (motor start,
				motor stop,
				freewheel stop,
				motor preheating
		Digital input functions		commands lock, alarms inhibition,
				thermal status
				reset, keyboard
				lock, motor selection, user
				alarm, command)
Digital outputs				
		Number of digital output	Nr.	3
				2 x 1 NO (SPST)
				+ 1 C/O (SPDT) Ratings: 2 x 1NO
				contacts: 3A
				250VAC - 3A
		Digital output arrangement		30VDC 1 x C/O contact: NO
		Digital output arrangement		contact 5A
				250VAC - 5A
				30VDC; NC
				contact 3A
				250VAC - 3A 30VDC
				Programmable
				(line contactor,
		Division to the contract		run, global alarm,
		Digital output functions		limits, remote variable, alarm
				Axx, user alarm
				Axx, OFF)
Ambient conditions				
Temperature	Operating temperature			
	Sporacing temperature	min	°C	-20
				+60°C (with
		max	°C	current derating
			=	>40°C of 0.5%/ °C )
	Storage temperature			<u> </u>
	c.orago tomporataro	min	°C	-30
		max	°C	+80






**ENERGY AND AUTOMATION** 

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		III
Housing		
Mounting		Screw-fixing or 35mm DIN rail with optional accessory EXP8003
IP degree of protection		IP00
Dimensions (W x H x D)	mm	95 x 226 x 182
Weight	Kg	2.9
Dimensions		

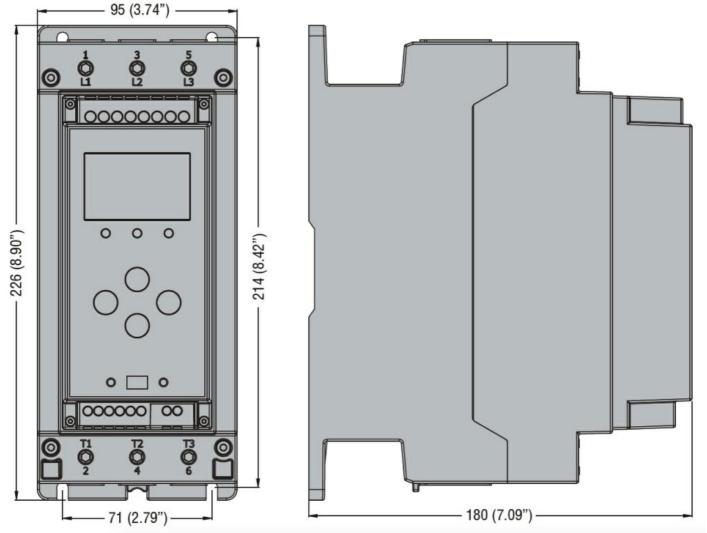

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508



**ENERGY AND AUTOMATION** 

## ADXL0085600

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

Certificates				
	cULus			
	EAC			
	RCM			
FTIM classification	nn			

E I IM classification

ETIM 8.0 EC000640 - Soft starter