

Product designation				Soft Starter
Product type designation				ADXL Asynchronous
Motor type				three phase
Electrical features				
Supplies voltage		Type of system		Three phase
		Rated supply voltage	V	208600VAC
		auxiliary supply voltage (Us)	v	100240VAC
		Rated frequency	Hz	50/60
Rated starter current I	e		A	30
Rated motor power	-			
·	IEC ratings (T≤40°C)			
	<b>,</b>	230VAC	kW	7.5
		400VAC	kW	15
		500VAC	KW	18.5
	UL ratings (T≤40°C)			
		220-240VAC	HP	10
		380-415VAC	HP	15
		440-480VAC	HP	20
		550-600VAC	HP	25
Number of controlled	phases		Nr.	2
Built-in bypass				Yes
Cooling System				Natural or forced (optional)
Rated insulation voltage Ui			V	600
Programming interfact	5			Backlit icon LCD
Display				display
Programming with NF	C technology			Yes
Optical port				Yes
Startup and stop settir	ngs			
Startup method				Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
Stop method				Torque ramp, voltage ramp, free-wheel stop
Protections Auxiliary supply protect	tion			Voltage too low
				1011290 100 1011



Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run),
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request
Functions	
Built-in bypass	2
Built-in display and keypad	Yes
Languages View measurements	Yes 6
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	No
Motor overload electronic protection	Yes
Motor protection PTC input	100
Protection against phase loss	Yes
	Yes
	Yes
Protection against phase inversion	Yes Yes
Protection against phase inversion Protection against locked rotor	Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature	Yes Yes Yes
Protection against phase inversion Protection against locked rotor	Yes Yes Yes Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	Yes Yes Yes Yes Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	Yes Yes Yes Yes Yes Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	Yes Yes Yes Yes Yes Yes Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs	Yes Yes Yes Yes Yes Yes Yes Yes Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	Yes Yes Yes Yes Yes Yes Yes Yes No Yes No
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output	Yes Yes Yes Yes Yes Yes Yes Yes No Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log	Yes Yes Yes Yes Yes Yes Yes Yes No Yes No Yes No RS485 Yes
Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming	Yes Yes Yes Yes Yes Yes Yes Yes No Yes No RS485

ADXL0030600



Clock calendar Yes Remote external keypad No Plug-in version Optional Input and Output **Digital inputs** Number of digital input Nr. 3 2 input with dry contact + 1 input Digital input type with dry contact or PTC (configurable) Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, **Digital input functions** alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command) **Digital outputs** 3 Number of digital output Nr. 2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O Digital output arrangement contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC Programmable (line contactor, run, global alarm, Digital output functions limits, remote variable, alarm Axx, user alarm Axx, OFF) Ambient conditions Temperature Operating temperature °C -20 min +60°C (with current derating °C max >40°C of 0.5%/ °C) Storage temperature °C min -30 °C +80 max


ADXL0030600



ADXL0030600 DÉMARREURS PROGRESSIFS AVEC RELAIS BY PASS INTÉGRÉ (SOFT STARTER) 30A 600V

Max altitude	m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity	%	<80%
Pollution degree		2
Installation category		
Housing		
Mounting		Screw-fixing or 35mm DIN rail with optional accessory EXP8003
IP degree of protection		IP00
Dimensions (W x H x D)	mm	75 x 218 x 171.5
Weight	Kg	2.1

Dimensions

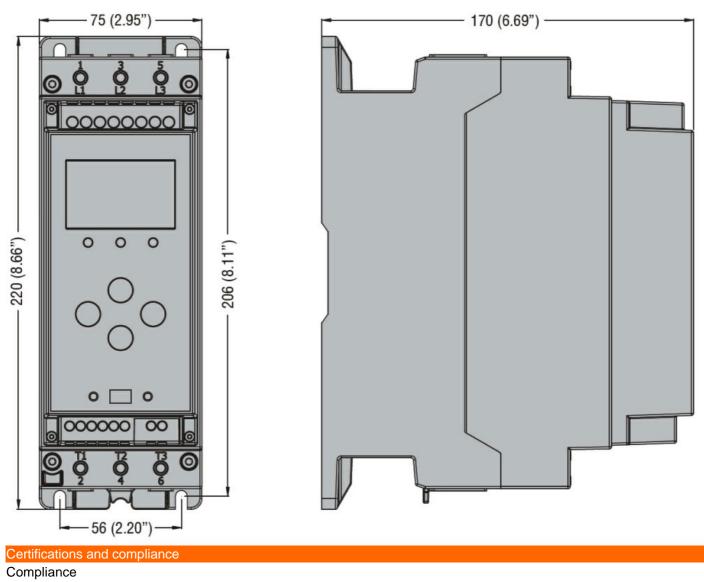

CSA C22.2 n° 14		
IEC/EN 60947-1		
IEC/EN 60947-4-2		

ADXL0030600

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding



ADXL0030600 DÉMARREURS PROGRESSIFS AVEC RELAIS BY PASS INTÉGRÉ (SOFT STARTER) 30A 600V

	UL508	
Certificates		
	cULus	
	EAC	
	RCM	
ETIM classificat	ion	
ETIM 8.0		EC000640 - Soft

starter

ADXL0030600