




Product designation	Automatic battery chargers
Product type designation	BCE
Type	Single phase automatic battery charger 1 charging level for lead-acid batteries


Power supply			
Rated voltage Us	min	VAC	220
	Max	VAC	240 ±10%
Operational frequency			
	min	Hz	50 ±5%
	max	Hz	60 ±5%
Power consumption			
	Max	VA	222
	Max	W	46
Internal fuse		A	4
Charging cycle			
Reference standards			IEC60335-2-29
Battery type			lead-acid
Battery voltage		VDC	12
Charging voltage (Uc)			13.8
Charging current (Ic)		A	6
Charging current adjustment		% Ic	30 to 100
Protections			Main supply fuse; Battery output fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at battery poles; 4. Output overload.
Indications			
LED indicator for operating status			Yes
LED reverse battery polarity			Yes
Alarm output circuit			
Output type			Relay with 1 c/o (SPDT)
Rated capacity			AC1: 5A 250VAC; DC13: 5A 30VDC

Mechanical life	cycles	>3000000
Electrical life	cycles	>1000000
Mechanical features		
Housing type	Internal panel mounting	
Terminals type	Fixed	
Fixing	Screw fixing	
Weight	g	4832
Ambient conditions		
Temperature		
Operating temperature		
min		°C -10
max		°C +50
Storage temperature		
min		°C -30
max		°C +80
Protection degree	IP00	

Dimensions

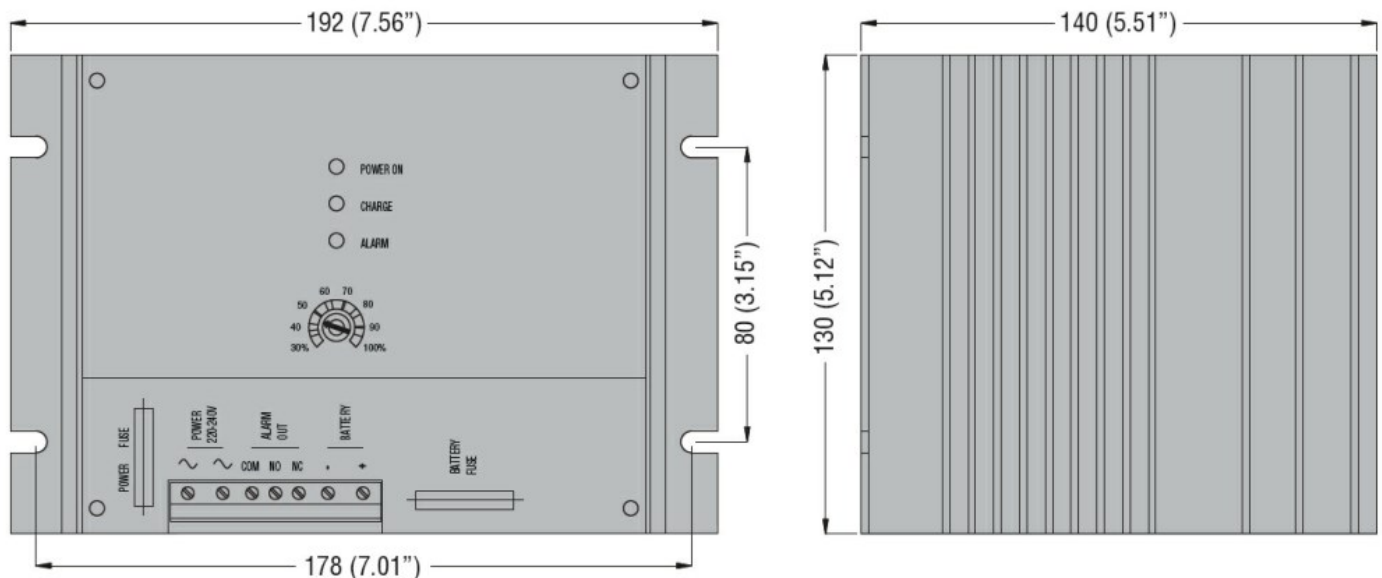

Wiring diagrams

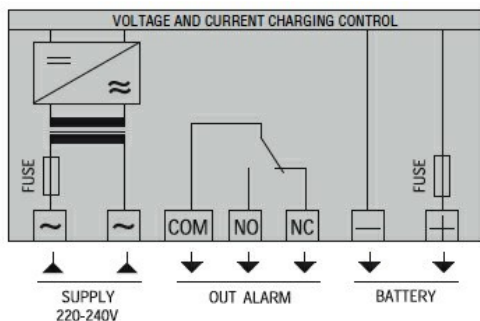

Certifications and compliance

Compliance

IEC/EN 60335-2-29

Certificates

EAC

ETIM classification

ETIM 8.0

EC000359 -
Universal charger