

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A

**ENERGY AND AUTOMATION** 



Product designation			RF38
Product type designation			Motor protection relay
General characteristics			·
Number of poles		Nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	Α	20
	aM (IEC)	Α	10
	RK5 (UL)	Α	40
Phase failure detection	· ·		yes
Reset mode			Manual or automatic
Power circuit characteristics			automatic
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency		•	
oporational modulonsy	min	Hz	0
	max	Hz	400
Operational current le	· · · · · · · · · · · · · · · · · · ·		
Operational outrone to	Operational current min	Α	6.3
	Operational current max	A	10
Tripping class	operational current max	- , ,	10A
Test Button			yes
Trip indicator			yes
Terminals			yco
Terrinials			screw and
	type		washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals			
righterning terique for terminale	min	Nm	2
	max	Nm	2.5
	min	lbin	1.5
	max	Ibin	1.8
Conductor section			
	Flexible w/o lug max	mm²	10
	Flexible c/w lug max	mm²	6
	AWG/kcmil max		8
Auxiliary circuit characteristics	7 (T) C/Normi max		



ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A

**Auxiliary contacts** 

NO	Nr.	1
NC_		1
		690 6
		690
	V	090
24\/	Δ	3
		3
		1.5
380V	Α	0.95
480V	Α	0.75
500V	Α	0.72
600V	Α	0.6
125V	Α	0.11
600V	Α	0.22
	Α	10
Auxiliary circuit type		screw and
		washer
		M3.5
	mm	8
Auxiliary circuit tool		Phillips 2
A william airea it Florible/a lan area.	2	0.5
-		2.5
Auxiliary circut Flexible c/w lug max	mm-	2.5
Auxiliary circuit min	Nm	0.8
		1
		0.59
		0.74
Administry chodic max	10111	B600-R300
		2000 11000
min	°C	-25
max	°C	60
min	°C	-50
max	°C	70
min	°C	-20
max	°C	60
	m	3000
normal		Vertical plan ±30°
allowable		Direct mounting
		on BF09
	g	BF38
	Auxiliary circuit type Auxiliary circuit victuit victu	NC Nr.  V  kV  V  24V A  120V A  240V A  380V A  480V A  500V A  600V A  600V A  A  A  A  A  Auxiliary circuit type  Auxiliary circuit screw Auxiliary circuit width Auxiliary circuit width Auxiliary circuit tool  Auxiliary circuit tool  Auxiliary circuit min C C max  °C  min  °C max  °C  min  normal

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A


**ENERGY AND AUTOMATION** 

Full-load current (FLA) for three-phase AC motor


at 480V Α 10 at 600V Α 10

## **Dimensions**


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

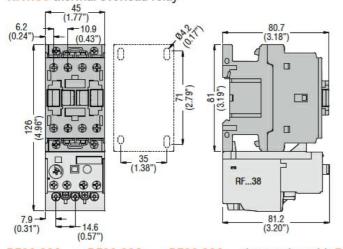

BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

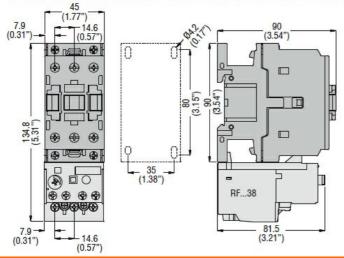

## Wiring diagrams

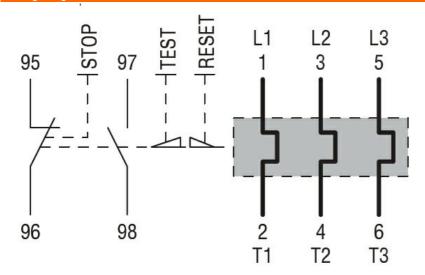

## Certifications and compliance

## RF381000



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 6.3...10A

**ENERGY AND AUTOMATION** 

Compliance

CSA C22.2 n° 14 IEC/EN 60947-1 IEC/EN 60947-4-1

**UL508** 

Certifications

CCC cULus

EAC

ETIM classification

EC000106 -**ETIM 8.0** Thermal overload relay