
GAX63K



DOOR-COUPLING HANDLE, PADLOCKABLE. RED/YELLOW, ROTATING, FOR GA...A, GA063SA, GA016C - GA040C AND GA...D. RING FIXING. PROTRUDING SELECTOR. 5MM/0.2". IEC IP66/IP69K UL TYPE 4X



Dimensions

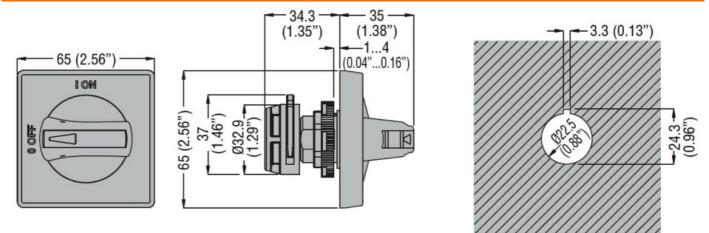

Certifications and compliance		
Compliance		
	CSA C22.2	
	IEC/EN 60947-1	
	IEC/EN 60947-3	
	UL508	
	UL98	
Certifications		
	cULus according to UL508 /CSA C22.2 n°14	
	cULus according to UL98 / CSA C22.2 n°4	
	EAC	
ETIM classification		
		EC000230 -
ETIM 8.0		Door coupling

uμ ıy handle for switchgear