



LED elements  
steady light base  
mount on LPZ  
control station  
LPXLPB

Product designation

Product type designation

General characteristics

Colour Green

Electrical characteristics

Rated frequency Hz 50-60

Supply voltage (AC) V 185...265

Operations

Electrical life hours 100000

Mechanical features

Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

Mounting adapter LPXAU120

Weight g 16

Ambient conditions

Temperature

Operating temperature


min °C -25  
max °C +70

Storage temperature


min °C -40  
max °C +85

Dimensions

### Mounting position on the LPZ control station base

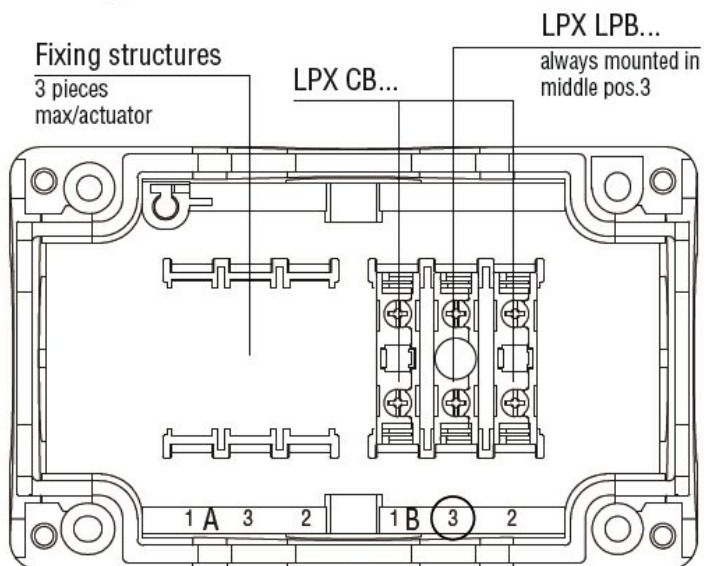

### Wiring diagrams

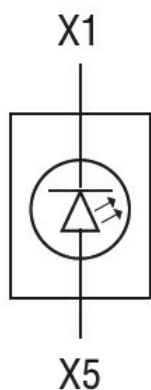

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

#### Certificates

CCC  
cULus  
EAC  
RINA  
UL

### ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices