



Product designation

Signal tower
Ø50mm/1.97"
LTN50

Product type designation

General characteristics

Diameter	mm - inch	50 / 1.97
Supply voltage (DC)	V	12...24
IEC degree of protection		IP65
Power consumption	VA	1

Mechanical features

Terminals screw	Spring terminals
-----------------	------------------


Conductor section	AWG/Kcmil	min	max	
				16
				24
	IEC	min	mm ²	0.25
		max	mm ²	1.5

Weight	g	136
--------	---	-----


Ambient conditions

Temperature	Operating temperature	min	°C	-30
		max	°C	+50

Dimensions

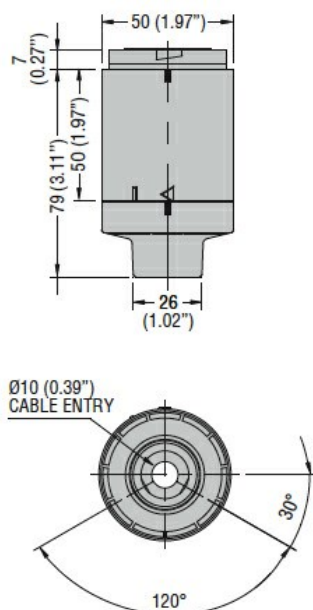

Wiring diagrams

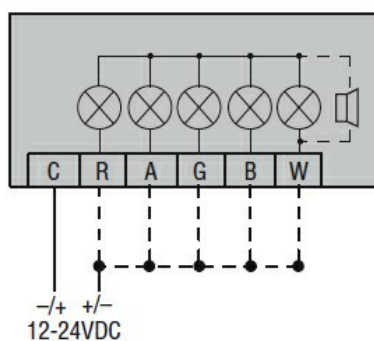

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC001154 -
Stand for signal
tower without
tube