



Product designation

Product type designation

Type

DIN rail module number

Auxiliary supply U_s

Operational frequency

min	Hz	50
max	Hz	60

Power consumption

Max	VA	3.5
-----	----	-----

Power dissipation Max

W	2.7
---	-----

Measuring voltage inputs

Rated voltage (U_e)

phase-phase	VAC	380...415
phase-neutral	VAC	220...240

Operating voltage range

phase-phase	VAC	323...456
phase-neutral	VAC	187...264

Connection method

Via CT

Current

IEC maximum (I_{max})

A	5
---	---

IEC minimum (I_{min})

A	0.05
---	------

IEC rated (I_{ref-Ib})

A	5
---	---

IEC start (I_{st})

mA	0.005
----	-------

Transition (I_{tr})

A	0.25
---	------

Accuracy

Active energy	Class 0.5s (IEC/EN 62053-22)
Reactive energy	Class 2 (IEC/EN 62053-23)

Output characteristics

LED Pulse rate

pulse/kWh	1000
-----------	------

LED Pulse duration

ms	30
----	----

Insulations

Rated insulation voltage U_i IEC/EN

V	250
---	-----

Rated impulse withstand voltage U_{imp}

kV	6
----	---

Operating frequency withstand voltage

kV	4
----	---

Mechanical features

Housing type

Polyamide

Terminals type


Fixed

Conductor cross section

min	mm ²	0.2
-----	-----------------	-----


				4 for supply voltage measurement; 2.5 for current measurement
	Max	mm ²		
	min	AWG		24
	Max	AWG		12
Tightening torque (Max)				
		Nm		0.8
		lbin		7
Fixing				
				Din rail
Weight				
		g		332
Ambient conditions				
Temperature				
	Operating temperature			
	min	°C		-25
	max	°C		+55
	Storage temperature			
	min	°C		-25
	max	°C		+70
Relative humidity				
		%		<80
Maximum Pollution degree				
				2

Dimensions

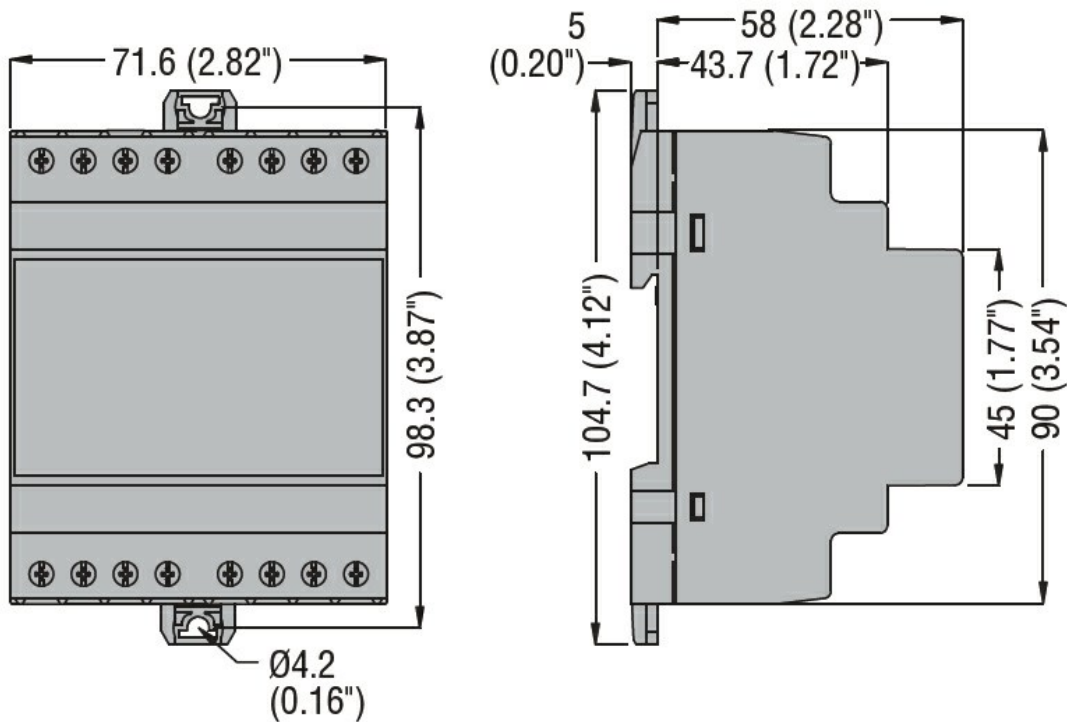


Wiring diagrams


Single-phase





Two-phase




Three-phase with or without neutral




Three-phase without neutral in ARON connection




Tariff input




Pulse output 30VDC 50mA for DME D305 T2



RS485 for DME D330



M-Bus for DME D332



Certifications and compliance

Compliance

IEC/EN 50470-1

IEC/EN 61010-1

IEC/EN 61010-2-030

Certificates

EAC

RCM

ETIM classification

ETIM 8.0

EC001506 -
Kilowatt-hour
meter