



Product designation	Micro PLC - Base module
Product type designation	LRD20RD024
Auxiliary supply voltage	24VDC
Number of inputs	Nr. 8 digital + 4 digital/analog
Number of outputs	Nr. 8 relay
Max I/O number	20 (12 inputs + 8 outputs) up to 44 with LRE modules

Power supply			
Rated auxil. supply voltage			24VDC
Operating voltage range			20.4...28.8VDC
Average current consumption	mA		185
Power consumption Max	W		5

Digital inputs			
Number of digital input	Nr.		8 + 4 digital/analog
Rated voltage	V		24VDC
Input signals		State 0 (OFF) State 1 (ON)	<5VDC >15VDC
Response time		0 to 1 (OFF-ON) 1 to 0 (ON-OFF)	4ms (0.5ms for high speed) 4ms (0.3ms for high speed)

Analog inputs			
Number of analog input	Nr.		4 digital/analog
Analog input type			Voltage inputs
Inputs signal range	V		0...10
Resolution			0.01V
Bit of conversion	bit		8
Current consumption at	10VDC	mA	<0.17mA
Input impedance		kΩ	>40
Admissible overload		VDC	28
Sampling time		ms	5...20ms(LADDER), 2...10ms (FBD)
Maximum cable length		m / ft	≤30m/98ft (shielded wire)

Digital outputs			
Number of digital output	Nr.		8
type			Relay

System resources			
-------------------------	--	--	--

Display	LCD display, 4 lines x 16 characters
---------	--------------------------------------

Connections

Terminals type	Screw
Tightening torque for terminals	max Nm 0.6 Max lbft 0.4
Conductor section	
AWG/Kcmil	min 26 max 14
IEC	min mm ² 0.14 max mm ² 2.5


Ambient conditions

Temperature	
Operating temperature	min °C -20 max °C +55
Storage temperature	min °C -40 max °C +70
Relative humidity	% 20...90% without condensation


Housing

Mounting	35mm DIN rail or screw fixing (M4x20mm)
Degree of protection	IP20
Dimensions (W x H x D)	mm 126 x 106 x 59.6
Weight	g 360

Dimensions

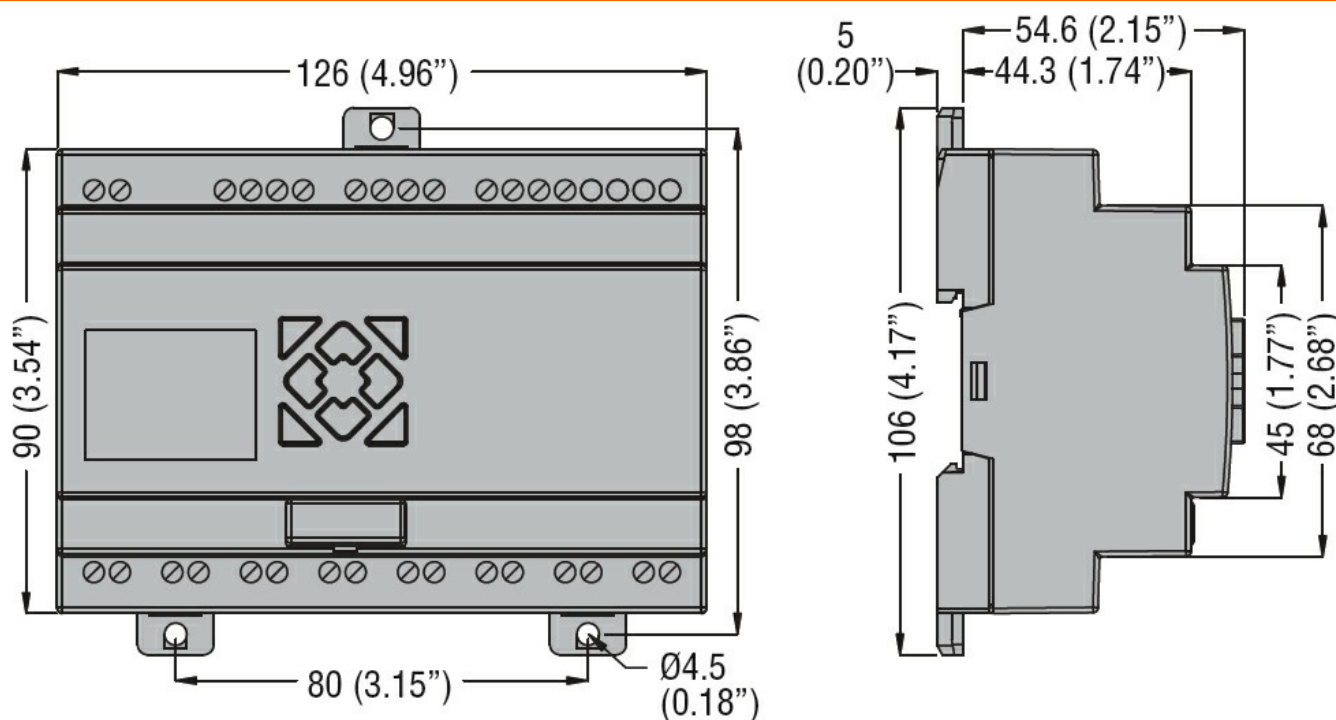

Wiring diagrams

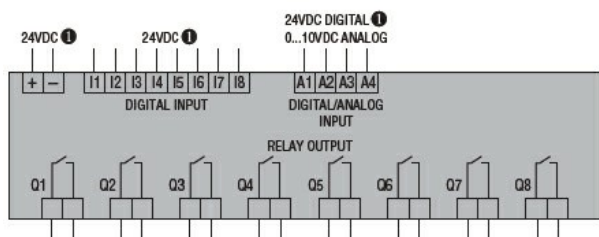

① 12VDC for LRD20R D012.

Certifications and compliance

Compliance

CSA C22.2 n° 142

IEC/EN 61131-2

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001417 -
Logic module