



Product designation

Product type designation

General characteristics

Voltage
monitoring relays
PMV20

Description

Phase loss and
incorrect phase
sequence relay

Type of system

Three-phase
without neutral

Power supply

Auxiliary supply voltage U_s

Self powered

Operating voltage range

0.85...1.1 U_e

Rated frequency

Hz 50/60 $\pm 5\%$

Power consumption Max

VA 28

Power dissipation Max

W 2.5

Control circuit

Rated voltage to control (U_e)

min	VAC	100
Max	VAC	240

Tripping delay

s 0.06

Resetting time

s 0.5

Resetting hysteresis

% 5

Instantaneous tripping for U_e

Voltage $< 70\% U_e$

Type of reset

Automatic

Repeat accuracy

% $\leq \pm 1$

Tripping time for phase loss

ms 60

Relay outputs

Number of relays

Nr. 1

Relay state

Normally
energised De-
energises at
tripping

Contact arrangement

1 changeover
SPDT

Rated operational voltage AC (IEC)

VAC 250

Maximum switching voltage

VAC 400

IEC Conventional free air thermal current I_{th}

A 8

UL/CSA and IEC/EN 60947-5-1 designation

B300

Electrical life (with rated load)

cycles 100000

Mechanical life

cycles 3000000

Functions

Modular version

2U

Minimum AC voltage

No

Maximum AC voltage

No


Phase loss

Yes


Incorrect phase sequence

Yes

Asymmetry			No		
Indications					
Indication			1 green LED for power on and tripping		
Connections					
Terminals type			Screw		
Tightening torque for terminals			max	Nm	0.8
			max	lbin	7
Conductor cross section					
AWG/Kcmil			min	AWG	24
			Max	AWG	12
IEC			min	mm²	0.2
			Max	mm²	4
Insulations					
Rated insulation voltage Ui			V	600	
Rated impulse withstand voltage Uimp			kV	6	
Operating frequency withstand voltage			kV	4	
Ambient conditions					
Temperature					
Operating temperature			min	°C	-20
			max	°C	+60
Storage temperature			min	°C	-30
			max	°C	+80
Housing					
Execution (n° of modules)			2		
Material			Self-extinguishing polyamide		
Mounting			35mm DIN rail (IEC/EN 60715)		
IEC degree of protection			IP40 on front; IP20 at terminals		
Dimensions (W x H x D)			mm	35.8 x 104.7 x 64.9	
Weight			g	120	
Dimensions					

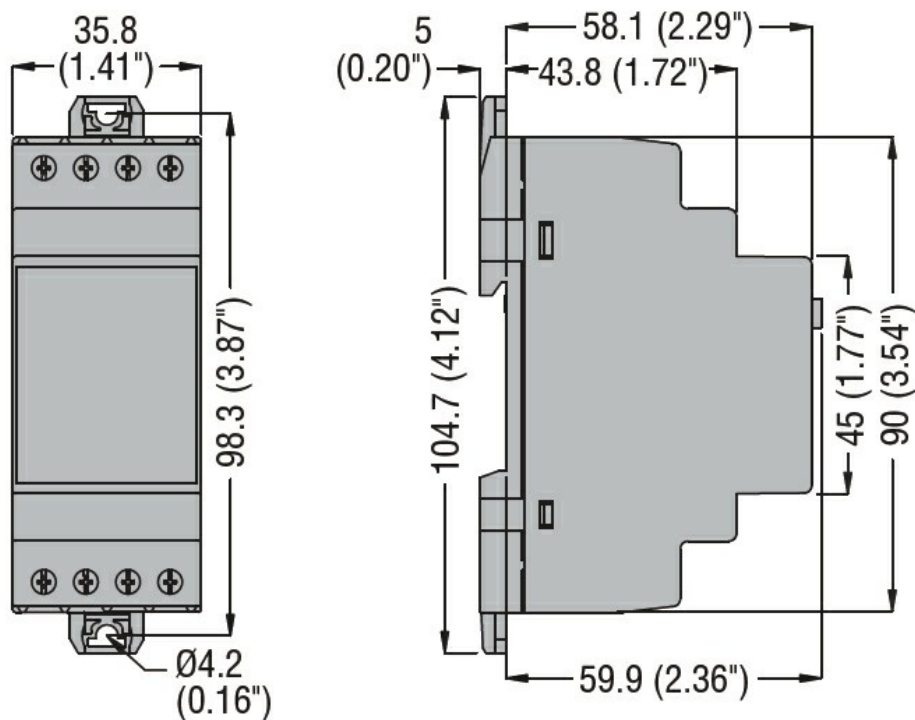

Wiring diagrams

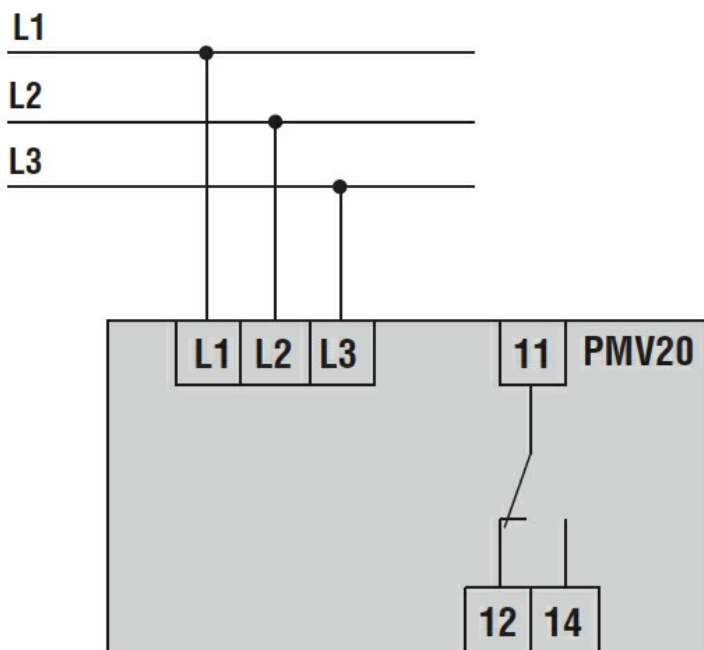

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL 508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001438 -
Voltage
monitoring relay