




Product designation			Dual power supply module
Product type designation			ATLDPS1
General characteristics			
Number of controlled power sources		Nr.	2
AC Power supply			
Rated supply voltage AC		VAC	110...230
Operating supply voltage range AC		VAC	80...300
Rated frequency		Hz	50/60
Operating frequency range		Hz	45...66
Power consumption AC (Max)		VA	7
Voltage inputs			
Maximum rated voltage Ue			110...230VAC
Measurement range		V	80...300
Frequency range		Hz	45...66
Measurement method			True root mean square (TRMS)
Wiring mode			Power supplied by the system with phase-to-neutral voltage <= 300VAC
Digital inputs			
Number of digital input		Nr.	1 for rated voltage selection 110/230VAC
Relay outputs			
Number of relay output		Nr.	3
Contact arrangement			2 x 2NO (presence line 1 and line 2), 1 x 2C/O (relay exchange line), 1 x NO (alarm)
Electrical life		cycles	10 ⁵
Mechanical life		cycles	10 ⁷
Ambient conditions			
Temperature			
Operating temperature		min	°C -30
		max	°C +70
Storage temperature		min	°C -30
		max	°C +80
Relative humidity		%	<80%
Maximum Pollution degree			2

Overvoltage category	3
Measurement category	III
Climatic sequence	Z/ABDM (IEC/EN 60068-2-61)
Shock resistance	15g (IEC/EN 60068-2-27)
Vibration resistance	0.7g (IEC/EN 60068-2-6)

Housing


Execution	Modular housing (3 modules DIN 43880)
Material	Polyamide
Mounting	35mm DIN rail (IEC/EN 60715) or screw-type by means of removable clips
Degree of protection	IP40 on front, IP20 on terminals
Dimensions (W x H x D)	mm 53.5 x 104.7 x 63
Weight	g 300

Dimensions

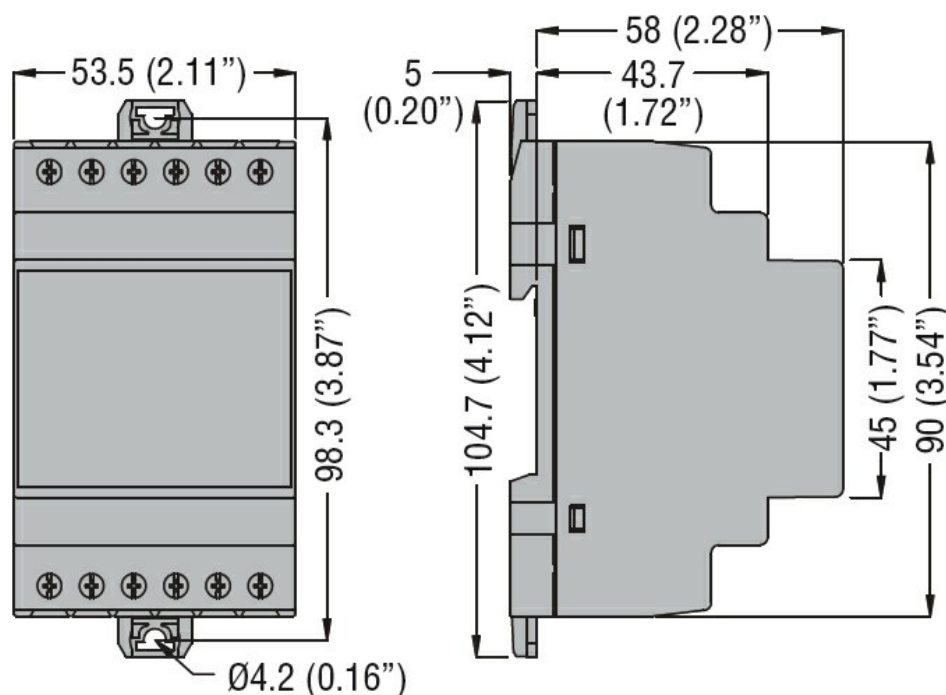

Wiring diagrams

Connection diagram

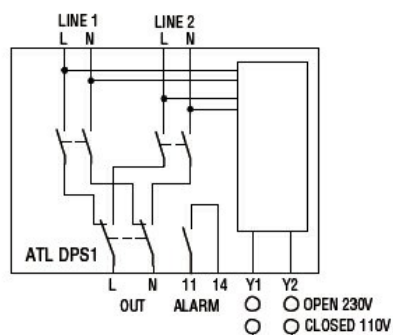

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-6-1

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL508

Certificates

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC002541 - AC-
power supply