





Product designation Product type designation			Plastic control station without actuators - for 1 actuators LPZP1A8
General characteristics			-
Colour			Grey
Material			Polycarbonate
IEC degree of protection			IP66, IP67, IP69K
Mechanical features			
Tightening torque for terminals max		Nm	1.8
Weight		g	107
UL technical data			
UL degree of protection			1, 2, 3R, 4, 4X, 12K
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85


Dimensions



LPZP1A8 AUFBAUGEHÄUSE GRAU, 1 EINBAUSTELLE SERIE PLATINUM Ø22MM



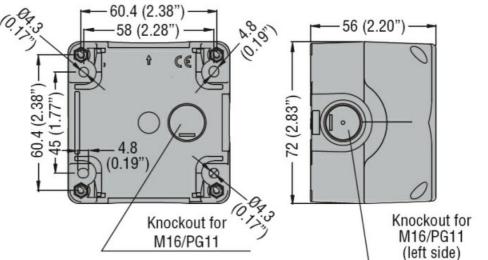



Knockout for M20/M25/PG13.5/PG16 (on top and bottom)

Certifications and compliance

Compliance		
	CSA C22.2 n° 14	
	IEC/EN 60947-1	
	IEC/EN 60947-5-1	
	UL508	
Certificates		
	cULus	
	EAC	
ETIM classification		

ETIM 8.0

EC000200 -Enclosure for control circuit devices