



Modular LCD
multimeters. non
expandable
DMG100
Three-phase +
neutral
4

Product designation

Product type designation

Type

DIN rail module number

Auxiliary supply Us

Auxiliary rated supply voltage AC	VAC	100...240
Auxiliary rated supply voltage DC	VDC	110...250
Auxiliary operating voltage range		
AC	min	VAC 90
	Max	VAC 264
DC	min	VDC 93.5
	Max	VDC 300

Operational frequency	min	Hz	45
	max	Hz	66

Power consumption	Max	VA	1.5
Power dissipation Max		W	0.5

Measuring voltage inputs

Rated voltage (Ue)	phase-phase	VAC	690
	phase-neutral	VAC	346

Operating voltage range	phase-phase	VAC	90...720
	phase-neutral	VAC	50...415

Voltage inputs operational frequency	min	Hz	45
	max	Hz	66

Voltage inputs measurement method			True RMS
-----------------------------------	--	--	----------


Connection method			Single. two. three-phase with or without neutral. balanced three- phase systems
-------------------	--	--	---

Current inputs

Rated current (Ie)	A	5
Measurement range		0.025...6A
Measurement method		TRMS


Overload capacity		+20% Ie through external CT with 5A secondary
-------------------	--	---

Overload peak	A	50A for 1s
Accuracy		
VLN voltage		±0.5%
VLL voltage		±0.5%
Current		±0.5%
Frequency		±0.05%
Active power		±1%
Active energy		Class 1 (IEC/EN 62053-21)
Reactive energy		Class 2 (IEC/EN 62053-23)
Insulations		
Rated insulation voltage Ui IEC/EN	V	690
Rated impulse withstand voltage Uimp	kV	9.5
Operating frequency withstand voltage	kV	5.2
Functions		
Harmonic analysis		15th order
PLC logic		No
Type of communication port		No
Ethernet-RS485 gateway function		No
Mechanical features		
Housing type		Polyamide
Terminals type		Fixed
Conductor cross section	min	mm ² 0.2
	Max	mm ² 4
	min	AWG 24
	Max	AWG 12
Tightening torque (Max)	Nm	0.8
	lbin	7
Fixing		Din rail
Weight	g	294
Ambient conditions		
Temperature		
Operating temperature	min	°C -20
	max	°C +60
Storage temperature	min	°C -30
	max	°C +80
Relative humidity		% <90
Maximum Pollution degree		2
Protection degree		IP30
Dimensions		

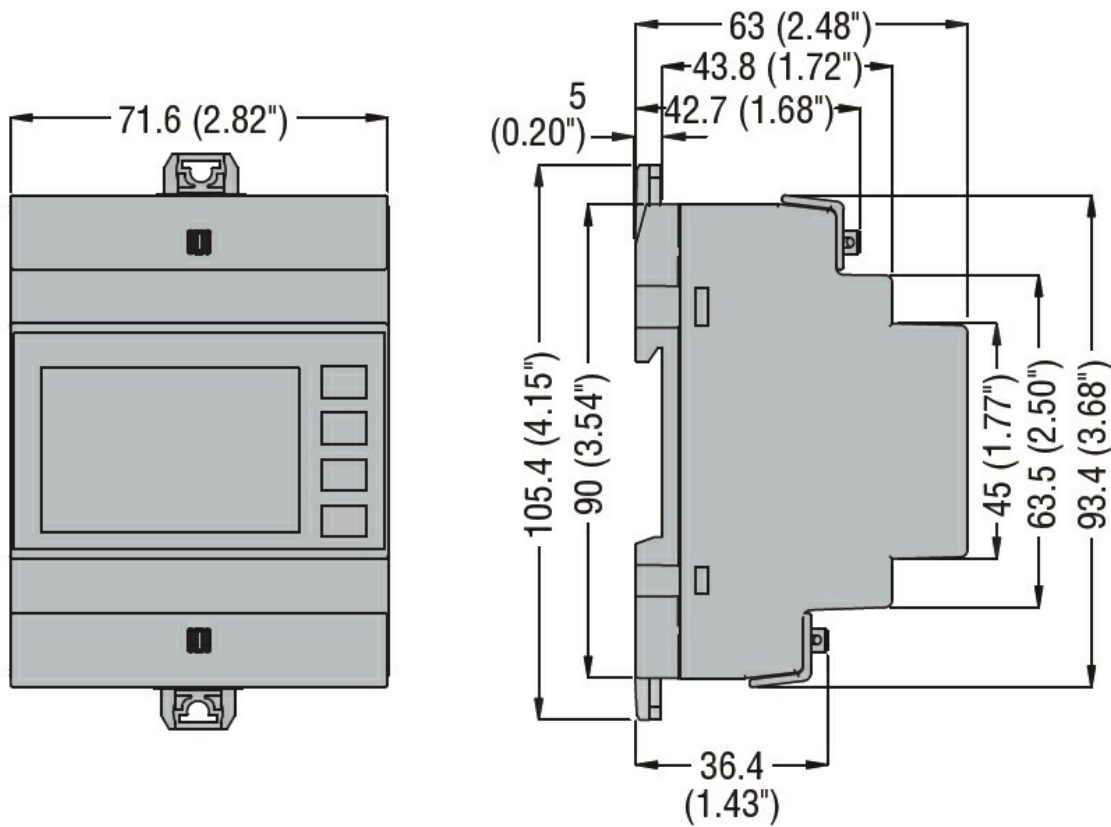


Wiring diagrams


Single-phase




Two-phase




Three-phase with or without neutral




Three-phase without neutral in ARON connection



Two-phase



Balanced 3-phase connection with or without neutral



CODE	AUX SUPPLY
DMG100-110-200-210-300	100...240VAC 110...250VDC
DMG6...	100...440VAC 110...250VDC
DMG7000-7500-8000-9000	100...240VAC 110...250VDC

RS485 for DMG110 and DMG210



RS485 for DMG610



RS485 for DMG7500 and DMG9000



Certifications and compliance

Compliance

CSA 22.2 n°61010-1

IEC/EN 61000-6-2

IEC/EN 61000-6-3

IEC/EN 61010-1

IEC/EN 61010-2-030

UL61010-1

Certificates

cULus

EAC

GOST

RCM

ETIM classification

ETIM 8.0

EC002301 -
Multifunction
measuring
instrument