



Product designation

Roller lever  
plunger  
KME

Product type designation

### General characteristics

Material

Housing

Aluminium-zinc  
alloy  
Metal

Roller


### Contact characteristics

Type of contact		1NO+1NC Snap action
Thermal current Ith	A	10
IEC/EN 60947-5-1 designation		A300 Q300
Rated insulation voltage Ui	V	440
Rated impulse withstand voltage Uimp	kV	4
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE
Switching speed	min max	m/s m/s 0.5 1.5
IEC Conventional free air thermal current Ith	A	10
Resistance per pole (average value)	mΩ	<10

### Mechanical features


Operating head fixing		Locking bayonet insert
Operating torque	Ncm ozin	3 4.25
Tightening torque (Max)		
Switch fixing	Nm lbin	2.5 22.1
Contact terminals	Nm lbin	0.8 7
Body lid screw fixing	Nm lbin	0.8 7
Conductor section		
AWG/Kcmil	min max	16 14
IEC	min max	mm <sup>2</sup> mm <sup>2</sup> 1 or 2 2.5

Cable connection			Self-releasing screw terminal	
Cable entry			M20 on the bottom	
Operations				
Mechanical life			cycles	<10000000
Mechanical operation			cycles/h	3600
Ambient conditions				
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature		min	°C	-40
		max	°C	+70
Resistance & Protection				
IP degree			Terminals	IP20
			Body housing	IP65
Pollution degree			3	
Dimensions				

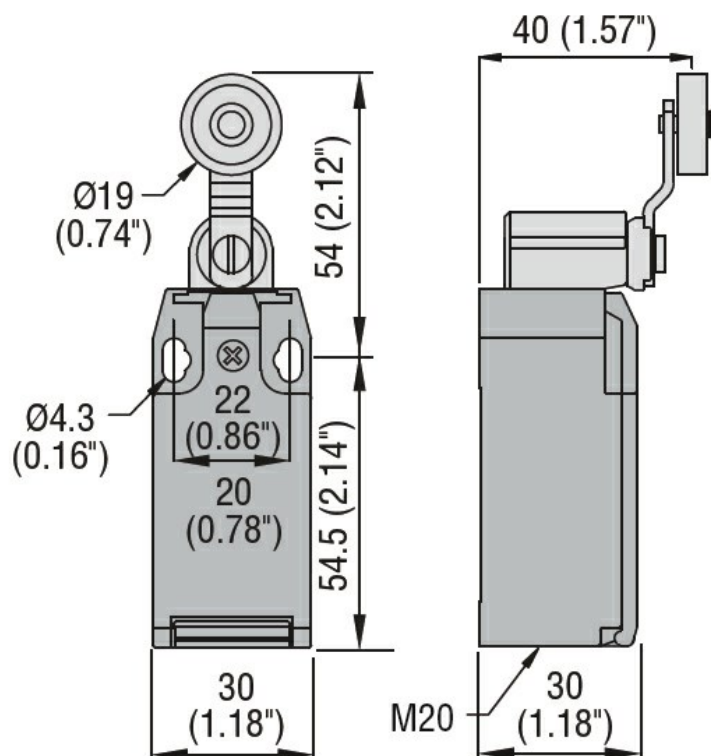

## Wiring diagrams

## Snap action

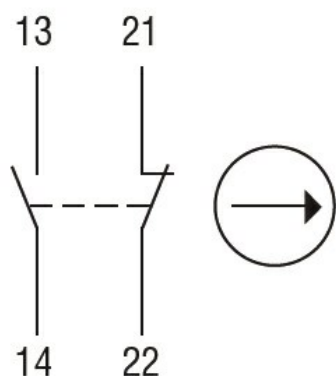

**1NO + 1NC**

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

CCC

cULus

EAC

### ETIM classification

ETIM 8.0

EC000030 - End  
switch