



Product designation

Power contactor

Product type designation

BG09

**Contact characteristics**

|                                                                                |                                                    |      |
|--------------------------------------------------------------------------------|----------------------------------------------------|------|
| Number of poles                                                                | Nr.                                                | 3    |
| Rated insulation voltage $U_i$ IEC/EN                                          | V                                                  | 690  |
| Rated impulse withstand voltage $U_{imp}$                                      | kV                                                 | 6    |
| Operational frequency                                                          | min Hz                                             | 25   |
|                                                                                | max Hz                                             | 400  |
| IEC Conventional free air thermal current $I_{th}$                             | A                                                  | 20   |
| Operational current $I_e$                                                      | AC-1 ( $\leq 40^\circ\text{C}$ )                   | A 20 |
|                                                                                | AC-1 ( $\leq 55^\circ\text{C}$ )                   | A 18 |
|                                                                                | AC-1 ( $\leq 70^\circ\text{C}$ )                   | A 15 |
|                                                                                | AC-3 ( $\leq 440\text{V } \leq 55^\circ\text{C}$ ) | A 9  |
|                                                                                | AC-4 (400V)                                        | A 4  |
| Rated operational power AC-3 ( $T \leq 55^\circ\text{C}$ )                     | 230V kW                                            | 2.2  |
|                                                                                | 400V kW                                            | 4    |
|                                                                                | 415V kW                                            | 4.3  |
|                                                                                | 440V kW                                            | 4.5  |
|                                                                                | 500V kW                                            | 5    |
|                                                                                | 690V kW                                            | 5    |
| Rated operational power AC-1 ( $T \leq 40^\circ\text{C}$ )                     | 230V kW                                            | 8    |
|                                                                                | 400V kW                                            | 14   |
|                                                                                | 500V kW                                            | 16   |
|                                                                                | 690V kW                                            | 22   |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ A                                | 12   |
|                                                                                | 48V A                                              | 10   |
|                                                                                | 75V A                                              | 4    |
|                                                                                | 110V A                                             | 3    |
|                                                                                | 220V A                                             | —    |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ A                                | 15   |
|                                                                                | 48V A                                              | 14   |
|                                                                                | 75V A                                              | 9    |
|                                                                                | 110V A                                             | 8    |
|                                                                                | 220V A                                             | —    |
| IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ A                                | 16   |
|                                                                                | 48V A                                              | 16   |
|                                                                                | 75V A                                              | 10   |
|                                                                                | 110V A                                             | 10   |

|                                                                      |          |      |      |
|----------------------------------------------------------------------|----------|------|------|
|                                                                      | 220V     | A    | 2    |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 4 poles in series      |          |      |      |
|                                                                      | ≤24V     | A    | 16   |
|                                                                      | 48V      | A    | 16   |
|                                                                      | 75V      | A    | 10   |
|                                                                      | 110V     | A    | 10   |
|                                                                      | 220V     | A    | 2    |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series |          |      |      |
|                                                                      | ≤24V     | A    | 7    |
|                                                                      | 48V      | A    | 6    |
|                                                                      | 75V      | A    | 2    |
|                                                                      | 110V     | A    | 1    |
|                                                                      | 220V     | A    | –    |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series |          |      |      |
|                                                                      | ≤24V     | A    | 8    |
|                                                                      | 48V      | A    | 8    |
|                                                                      | 75V      | A    | 5    |
|                                                                      | 110V     | A    | 4    |
|                                                                      | 220V     | A    | –    |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series |          |      |      |
|                                                                      | ≤24V     | A    | 10   |
|                                                                      | 48V      | A    | 10   |
|                                                                      | 75V      | A    | 6    |
|                                                                      | 110V     | A    | 5    |
|                                                                      | 220V     | A    | 0,8  |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series |          |      |      |
|                                                                      | ≤24V     | A    | 10   |
|                                                                      | 48V      | A    | 10   |
|                                                                      | 75V      | A    | 6    |
|                                                                      | 110V     | A    | 5    |
|                                                                      | 220V     | A    | 0,8  |
| Short-time allowable current for 10s (IEC/EN60947-1)                 |          | A    | 96   |
| Protection fuse                                                      |          |      |      |
|                                                                      | gG (IEC) | A    | 20   |
|                                                                      | aM (IEC) | A    | 10   |
| Making capacity (RMS value)                                          |          | A    | 92   |
| Breaking capacity at voltage                                         |          |      |      |
|                                                                      | 440V     | A    | 72   |
|                                                                      | 500V     | A    | 72   |
|                                                                      | 690V     | A    | 72   |
| Resistance per pole (average value)                                  |          | mΩ   | 10   |
| Power dissipation per pole (average value)                           |          |      |      |
|                                                                      | Ith      | W    | 4    |
|                                                                      | AC-3     | W    | 0.81 |
| Tightening torque for terminals                                      |          |      |      |
|                                                                      | min      | Nm   | 0.8  |
|                                                                      | max      | Nm   | 1    |
|                                                                      | min      | Ibin | 9    |
|                                                                      | max      | Ibin | 9    |
| Tightening torque for coil terminal                                  |          |      |      |
|                                                                      | min      | Nm   | 0.8  |
|                                                                      | max      | Nm   | 1    |
|                                                                      | min      | Ibin | 9    |

|                                                     |                  |                  |                          |
|-----------------------------------------------------|------------------|------------------|--------------------------|
|                                                     | max              | I <sub>bin</sub> | 9                        |
| Max number of wires simultaneously connectable      |                  | Nr.              | 2                        |
| Conductor section                                   |                  |                  |                          |
| AWG/Kcmil                                           | max              |                  | 12                       |
| Flexible w/o lug conductor section                  | min              | mm <sup>2</sup>  | 0.75                     |
|                                                     | max              | mm <sup>2</sup>  | 2.5                      |
| Flexible c/w lug conductor section                  | min              | mm <sup>2</sup>  | 1.5                      |
|                                                     | max              | mm <sup>2</sup>  | 2.5                      |
| Flexible with insulated spade lug conductor section | min              | mm <sup>2</sup>  | 1.5                      |
|                                                     | max              | mm <sup>2</sup>  | 2.5                      |
| Power terminal protection according to IEC/EN 60529 |                  |                  | IP20 when properly wired |
| <b>Mechanical features</b>                          |                  |                  |                          |
| Operating position                                  | normal allowable |                  | Vertical plan ±30°       |
| Fixing                                              |                  |                  | Screw / DIN rail 35mm    |
| Weight                                              |                  | g                | 178                      |
| Conductor section                                   |                  |                  |                          |
| AWG/kcmil conductor section                         | max              |                  | 12                       |
| <b>Auxiliary contact characteristics</b>            |                  |                  |                          |
| Thermal current I <sub>th</sub>                     |                  | A                | 10                       |
| IEC/EN 60947-5-1 designation                        |                  |                  | A600 - Q600              |
| Operating current AC15                              | 230V             | A                | 3                        |
|                                                     | 400V             | A                | 1.9                      |
|                                                     | 500V             | A                | 1.4                      |
| Operating current DC12                              | 110V             | A                | 2.9                      |
| Operating current DC13                              | 24V              | A                | 2.9                      |
|                                                     | 48V              | A                | 1.4                      |
|                                                     | 60V              | A                | 1.2                      |
|                                                     | 110V             | A                | 0.6                      |
|                                                     | 125V             | A                | 0.55                     |
|                                                     | 220V             | A                | 0.3                      |
|                                                     | 600V             | A                | 0.1                      |
| <b>Operations</b>                                   |                  |                  |                          |
| Mechanical life                                     |                  | cycles           | 20000000                 |
| Electrical life                                     |                  | cycles           | 500000                   |
| <b>Safety related data</b>                          |                  |                  |                          |
| Performance level B10d according to EN/ISO 13489-1  | rated load       | cycles           | 500000                   |
|                                                     | mechanical load  | cycles           | 20000000                 |
| Mirror contacts according to IEC/EN 60947-4-1       |                  |                  | yes                      |
| EMC compatibility                                   |                  |                  | yes                      |
| <b>AC coil operating</b>                            |                  |                  |                          |

|                                     |                    |      |
|-------------------------------------|--------------------|------|
| Rated AC voltage at 50/60Hz         | V                  | 24   |
| AC operating voltage                |                    |      |
| of 50/60Hz coil powered at 50Hz     |                    |      |
| pick-up                             | min %Us            | 75   |
|                                     | max %Us            | 115  |
| drop-out                            | min %Us            | 20   |
|                                     | max %Us            | 55   |
| of 50/60Hz coil powered at 60Hz     |                    |      |
| pick-up                             | min %Us            | 80   |
|                                     | max %Us            | 115  |
| drop-out                            | min %Us            | 20   |
|                                     | max %Us            | 55   |
| AC average coil consumption at 20°C |                    |      |
| of 50/60Hz coil powered at 50Hz     | in-rush holding VA | 30   |
|                                     |                    | 4    |
| of 50/60Hz coil powered at 60Hz     | in-rush holding VA | 25   |
|                                     |                    | 3    |
| of 60Hz coil powered at 60Hz        | in-rush holding VA | 30   |
|                                     |                    | 4    |
| Dissipation at holding ≤20°C 50Hz   | W                  | 0.95 |
| Max cycles frequency                |                    |      |
| Mechanical operation                | cycles/h           | 3600 |
| Operating times                     |                    |      |
| Average time for Us control         |                    |      |
| in AC                               |                    |      |
| Closing NO                          | min ms             | 12   |
|                                     | max ms             | 21   |
| Opening NO                          | min ms             | 9    |
|                                     | max ms             | 18   |
| Closing NC                          | min ms             | 17   |
|                                     | max ms             | 26   |
| Opening NC                          | min ms             | 7    |
|                                     | max ms             | 17   |
| in DC                               |                    |      |
| Closing NO                          | min ms             | 18   |
|                                     | max ms             | 25   |
| Opening NO                          | min ms             | 2    |
|                                     | max ms             | 3    |
| Closing NC                          | min ms             | 3    |
|                                     | max ms             | 5    |

Opening NC

|     |    |    |
|-----|----|----|
| min | ms | 11 |
| max | ms | 17 |

UL technical data

Full-load current (FLA) for three-phase AC motor

|         |   |     |
|---------|---|-----|
| at 480V | A | 7.6 |
| at 600V | A | 6.1 |

Yielded mechanical performance

for single-phase AC motor

|          |    |     |
|----------|----|-----|
| 110/120V | HP | 0.5 |
| 230V     | HP | 1.5 |

for three-phase AC motor

|          |    |   |
|----------|----|---|
| 200/208V | HP | 2 |
| 220/230V | HP | 3 |
| 460/480V | HP | 5 |
| 575/600V | HP | 5 |

General USE

Contactor

|            |   |    |
|------------|---|----|
| AC current | A | 20 |
|------------|---|----|

Short-circuit protection fuse, 600V

High fault

|                       |    |     |
|-----------------------|----|-----|
| Short circuit current | kA | 100 |
| Fuse rating           | A  | 30  |
| Fuse class            |    | J   |

Standard fault

|                       |    |     |
|-----------------------|----|-----|
| Short circuit current | kA | 5   |
| Fuse rating           | A  | 30  |
| Fuse class            |    | RK5 |

Contact rating of auxiliary contacts according to UL

A600 - Q600

Ambient conditions

Temperature

Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -50 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -60 |
| max | °C | +80 |

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

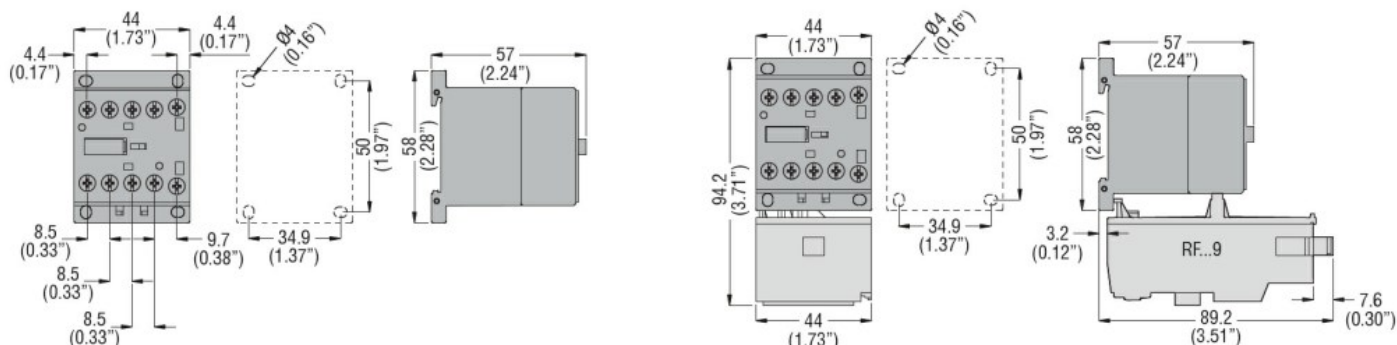

Wiring diagrams

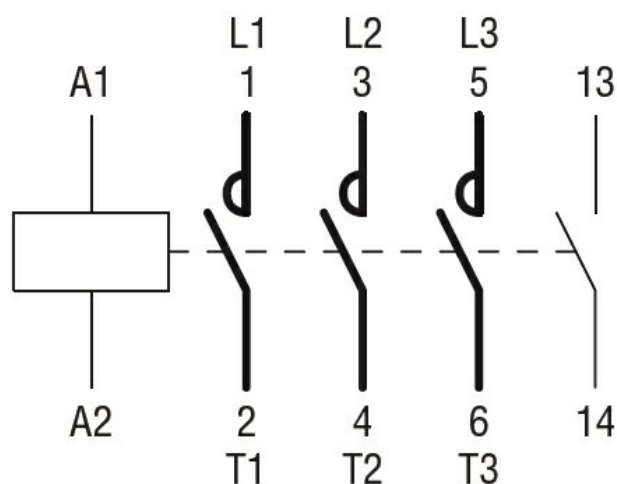

## Certifications and compliance

### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

### Certificates

CCC

cULus

EAC

## ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching