



Product designation
Product type designation
Motor type

Soft Starter
ADXC
Asynchronous
three phase

Electrical features

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	220...400VAC
auxiliary supply voltage (Us)		110...400VAC
Rated frequency	Hz	50/60
Start command (Uc)		110...400VAC -15...+10%

Rated starter current Ie	A	32
--------------------------	---	----

Rated motor power

IEC ratings (T≤40°C)

230VAC	kW	9
400VAC	kW	15

UL ratings (T≤40°C)

220-240VAC	HP	10
380-415VAC	HP	15

Number of controlled phases	Nr.	2
-----------------------------	-----	---

Built-in bypass	Yes
-----------------	-----

Cooling System	Natural
----------------	---------

Rated insulation voltage Ui	V	630
-----------------------------	---	-----

Programming interface

Display	No
---------	----

Programming with NFC technology	No
---------------------------------	----

Optical port	No
--------------	----

Startup and stop settings

Startup method	Voltage ramp with current limitation
----------------	---

Stop method	Voltage ramp or free-wheel stop
-------------	------------------------------------

Acceleration ramp	s	1...20
-------------------	---	--------

Deceleration ramp	s	0...20
-------------------	---	--------

Startup voltage	%	0...85%
-----------------	---	---------

Protections

Motor protection	Wrong phase sequence
------------------	-------------------------

Ambient conditions

Temperature

Operating temperature


min	°C	-20
max	°C	+60°C (with derating >40°C)

Storage temperature

SOFT STARTER, ADXC... TYPE, WITH INTEGRATED BY-PASS. THREE-PHASE 400VAC
MOTOR CONTROL, AUXILIARY SUPPLY: STARTER 110...400VAC (L1-L2-L3 INPUTS); START
COMMAND 110-400VAC (A1-A2 TERMINALS), 32A

	min max	°C °C	-40 +80
Max altitude		m	1000
Relative humidity		%	<95 non condensing at 40°C
Pollution degree			2
Installation category			III
Housing			
Mounting			Screw-fixing or 35mm DIN rail
IP degree of protection			IP20
Dimensions (W x H x D)	mm		45 x 125 x 109.8
Weight	Kg		0.5

Dimensions

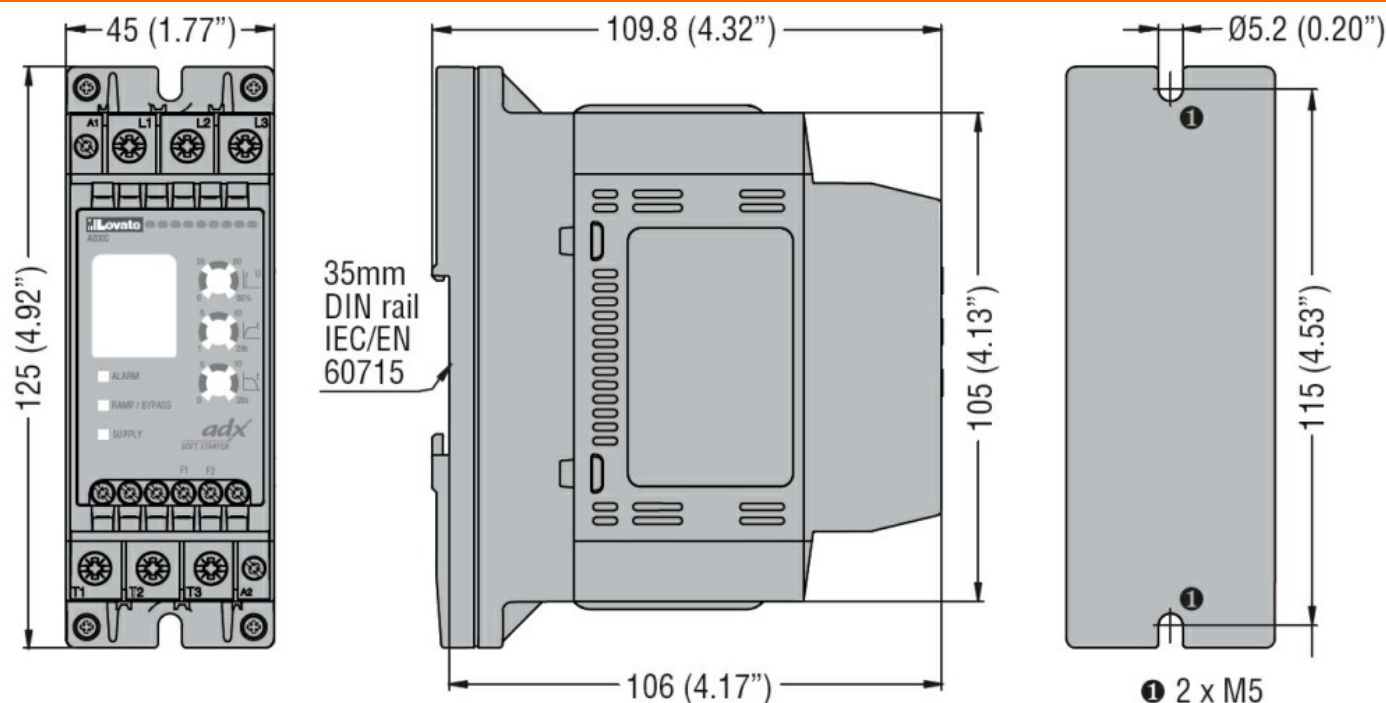

Certifications and compliance

Compliance

CSA C22-2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-2
UL508

Certificates

cULus
EAC
RCM

ETIM classification

ETIM 8.0

EC000640 - Soft
starter