





Number of poles	Nr.	1
Operating voltage type		AC
Contact characteristics		
IEC Conventional free air thermal current Ith	A	15
Mechanical features		
Tightening torque for terminals	min	Nm 1.8
	max	Nm 2
	min	Ibin 16
	max	Ibin 18

Dimensions

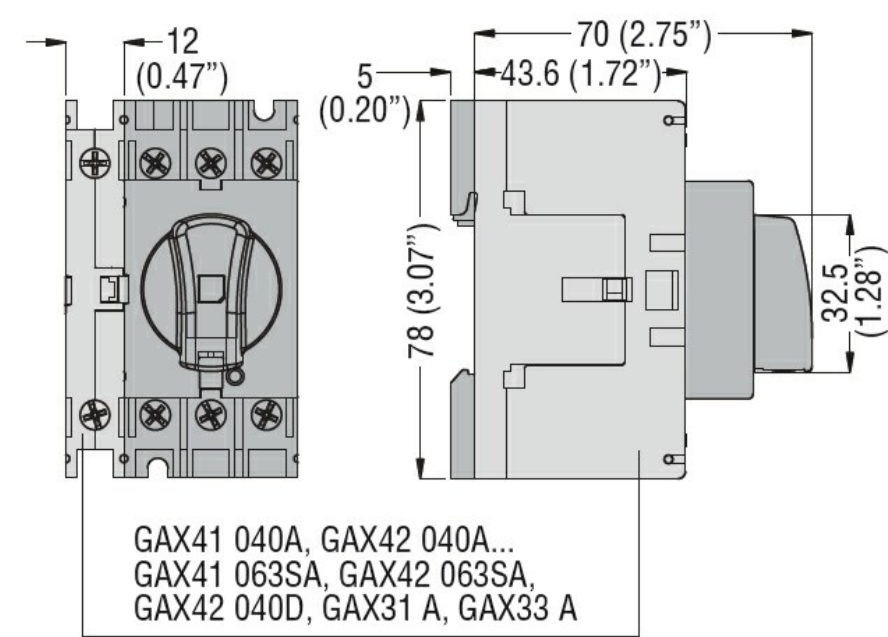

Wiring diagrams

Fourth pole add on  
**GAX42...** **GAX41...**

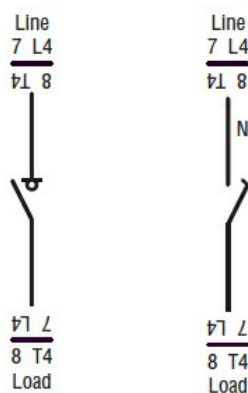

## Certifications and compliance

### Compliance

CSA C22.2

IEC/EN 60947-1

IEC/EN 60947-3

UL508

UL98

### Certifications

cULus UL508 / CSA C22.2 n° 14

EAC