



## Modular time relays TM series



moduLo

**Lovato**  
**electric**

*100% electricity*

# Modular time relays



**moduLo**

LOVATO Electric extends the range of electronic time relays with new modular models of the TM series, **moduLo** line.

- Models with multiscale 0.1 seconds ... 100 days
- Wide supply voltage range 12 ... 440V
- Excellent time accuracy and stability
- Immunity to industrial ambient noise
- Operating temperature -20 ... +60°C
- Robust modular DIN 43880 housing, one module
- 35mm DIN rail mounting or screw fixing by extractible clips
- Conductor section 0.2 ... 4mm<sup>2</sup>
- Reliable in most severe operating conditions.

## Time relays



ORDER CODE	TM P	TM M1	TM M2	TM PL	TM D	TM ST	TM ST A440
DESCRIPTION	On delay	Programmable multifunction	Programmable multifunction	Asymmetrical recycle	True off delay	For star- delta starting	
CONTROL CIRCUIT							
Rated supply voltage (Us)	24-48VDC 24-240VAC	12-240VAC/DC			24-240VAC/DC	24/48VDC 24-240VAC	380-440VAC
TIMING CIRCUIT							
Timing setting range		Multiscale 0.1-1s 1-10s 6-60s 1-10min 6-60min 1-10h 0.1-1 day 1-10 days ON only OFF only		Multiscale 0.1-1s 1-10s 6-60s 1-10min 6-60min 1-10h 0.1-1 day 1-10 days 3-30 days 10-100 days	Multiscale 0.06-0,6s 0.6-6s 6-60s 8-180s		Multiscale 0.1-1s 1-10s 6-60s 1-10min
OUTPUT CONTACTS							
Contact arrangement	1 delayed changeover	1 instantaneous/ delayed N/O + 1 delayed c/o		1 delayed changeover		2 delayed N/O	
Maximum switching voltage	250VAC						
Conventional free air thermal current (Ith)	8A			5A		8A	
OTHER INFORMATION							
Operating ambient temperature	-20...+60°C						
Quantity per package [n°]	1						
Net weight [kg]	0.048	0.053	0.078	0.060		0.065	

## Staircase time relay

DESCRIPTION	Staircase illumination		
CONTROL CIRCUIT	220-240VAC		
Rated supply voltage (Us)	220-240VAC		
TIMING CIRCUIT	Single scale 0.5-20min		
Time setting range	Single scale 0.5-20min		
OUTPUT CONTACTS	Contact arrangement	1 delayed N/O	
	Maximum switching voltage	250VAC	
	Conventional free air thermal current (Ith)	16A	
	OTHER INFORMATION		
	Operating temperature	-20...+60°C	
	Quantity per package [n°]	1	
	Net weight [kg]	0.060	

- Connection with up to 50 light-up switches maximum
- Suitable for 3 or 4-wire systems
- 1 slide switch for manual or automatic operation (constant lighting)
- Extra lighting time function: when the button is pressed for more than 3s, the time relay remains energised for 1 hour. By pressing it again for additional 3s, the time relay de-energises.



ORDER CODE

**TM LS**

# Operational and wiring diagrams




A1-A2 = Power supply


ON ⊗ = LED indicator for power on

⊗ ⊘ = LED indicator for relay state


## TM P




On delay. Delay on make, with start at relay energising




## TM M1



On delay. Delay on make, with start at relay energising




## TM M2

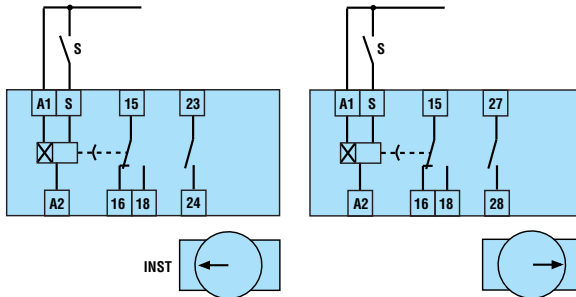


With the rotary switch on INST, the configurable contact (23 - 24) instantaneously switches at relay energising. With the rotary switch on DEL, the configurable contact (27 - 28) replicates the same operation of the first contact (15 - 18).


Off delay. Relay energising at external contact closing with start on break




Internal trigger ON/OFF. Relay contact either opens or closes at each external contact closing




Pulse on relay energising with start on energising




Pulse on relay energising with start at external contact closing




Pulse generator. Unequal timing recycle, starting with ON pulse time and 0.5sec OFF time




Flasher, starting with OFF (pause) interval. Equal timing recycle, OFF first




Pulse on relay energising with start at external contact opening




## TM PL




ON first (W)




Flasher, starting with ON (work) interval. Equal timing recycle, ON first



On-Off delay. Delay on make, with start at external contact closing, and delay at break, with start at external contact opening



OFF first (P)



# Operational and wiring diagrams





A1-A2 = Power supply

ON ⊗ = LED indicator for power on

⊗ † = LED indicator for relay state



## TM D

True off delay. Delay on break, starting at relay de-energising






## TM ST

For star-delta starting




## TM LS

Staircase lighting

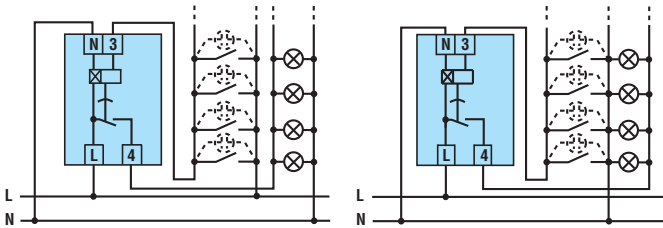

## Dimensions [mm]

moduLo

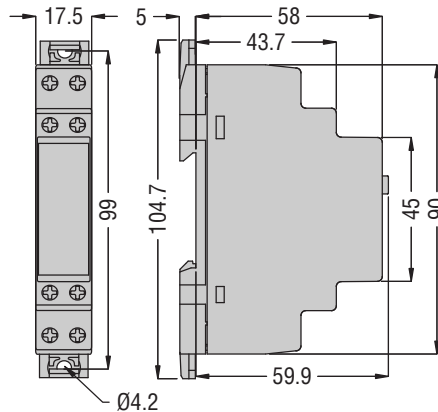


## Certifications and compliance

Certifications obtained: cULus, GOST.

Compliant with standards: IEC/EN 61812-1.

LOVATO Electric can also offer a complete range of time relays in the following versions.

## DIN mount time relays

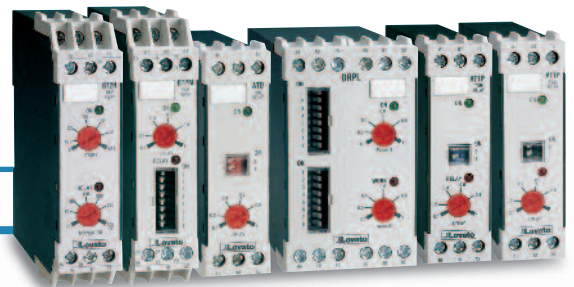

- 31 AT1P... On delay. Multiscale. Multivoltage in AC. 1 changeover contact.
- 31 AT1CP... On delay. Multiscale. Multivoltage in AC and DC. 1 changeover contact.
- 31 ATD... Off delay. Multiscale. Single voltage in AC and DC. 1 changeover contact.
- 31 AT1DP... Off delay at external contact opening. Multiscale. Single voltage in AC and DC. 1 changeover contact.
- 31 BTM 220 Multifunction. Multiscale. Multivoltage in AC and DC. 2 independent changeover contacts.
- 31 DRPL 220 Asymmetrical recycle. Multiscale. Multivoltage in AC and DC. 2 independent changeover contacts.
- 31 BT2N... For starting. Dual voltage in AC and DC.

## Plug-in and flush-mount time relays, 48x48mm

- 31 L48T... On delay. Single scale. Single voltage. 1 changeover contact.
- 31 L48TP... On delay. Multiscale. Multivoltage. 1 changeover contact.
- 31 L48TPB... On delay. Multiscale. Single voltage. 2 independent changeover contacts.
- 31 L48M... Multifunction. Multiscale. Multivoltage. 2 changeover contacts.



The above-indicated order codes must be completed with the end-scale time value, if any, and the supply voltage. Contact our Customer Service (Tel. +39 035 4282422; email: service@LovatoElectric.com).



Switch disconnectors  
16A to 1250A

**orange**



Contactors



Digital multimeters and analyzers  
DMG series




Automatic transfer switch controllers  
ATL 10 type




Switching power supplies


**PLANET Switch**

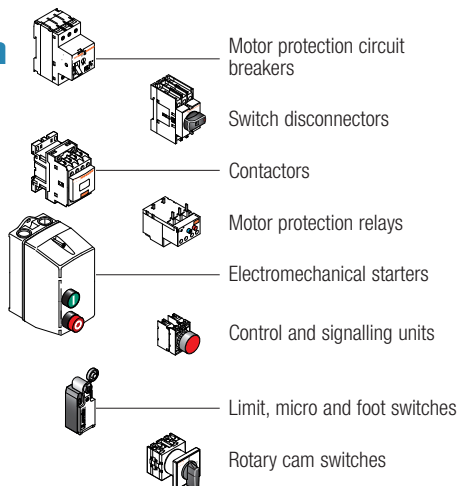

**PLANET Din**

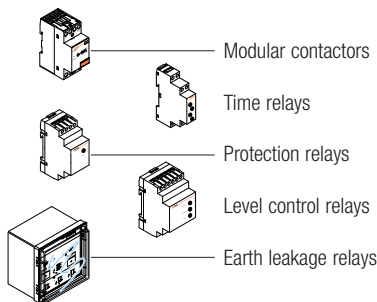

**PLANET Logic**

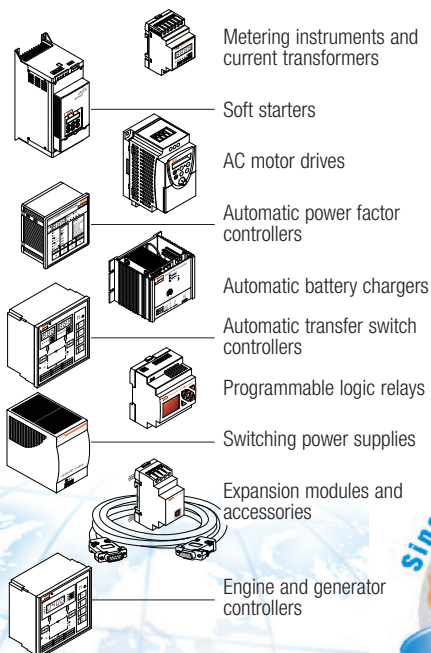

**www.LovatoElectric.com**

**LOVATO ELECTRIC S.P.A.**  
CONTROL SOLUTIONS FOR INDUSTRY  
VIA DON E. MAZZA, 12 - 24020 GORLE (BERGAMO) ITALY  
Tel. +39 035 4282111 Fax +39 035 4282200  
E-mail: info@LovatoElectric.com

Sales Department: Tel. +39 035 4282354 - Fax +39 035 4282400

**LOVATO Electric offices in the world**

**United Kingdom**  
LOVATO (UK) LTD  
Tel. +44 8458 110023  
www.Lovato.co.uk

**Czech Republic**  
LOVATO S.R.O.  
Tel. +420 382 265482  
www.Lovato.cz

**Germany**  
DELTEC LOVATO GmbH  
Tel. +49 7237 1733  
www.DeltecLovato.de

**USA**  
LOVATO ELECTRIC INC  
Tel. +1 757 545 4700  
www.LovatoUsa.com

**Spain**  
LOVATO ELECTRIC SLU  
Tel. +34 93 7812016  
www.LovatoElectric.es

**Canada**  
LOVATO ELECTRIC CORPORATION  
Tel. +1 450 681 9200  
www.Lovato.ca

**Poland**  
LOVATO ELECTRIC SP. Z O.O.  
Tel. +48 71 7979010  
www.LovatoElectric.pl

**Mexico**  
LOVATO ELECTRIC DE MEXICO, S.A. DE C.V.  
Tel. +52 555 3415662  
www.LovatoElectric.com.mx



100% electricity



Present in over 90 countries

The products described in this publication are subject to be revised or improved at any moment. Catalogue descriptions and details, such as technical and operational data, drawings, diagrams and instructions, etc., do not have any contractual value. In addition, products should be installed and used by qualified personnel and in compliance with the regulations in force for electrical systems in order to avoid damages and safety hazards.