




Product designation		Variable speed drives	
Product type designation		VLB3	
General characteristics			
Rated power supply voltage		400...480VAC 50/60Hz	
Rated output voltage		VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current		A	13
Rated output power		kW	5.5
Rated output power		HP	7.5 (Heavy load) / 10 (Standard load)
EMC filter		Built-in EMC suppressor cat. C2	
Communication port		RS485, Modbus- RTU	
Technical features			
Input type		Three-phase	
Rated mains voltage		VAC	400...480
Operating mains voltage range		VAC	340...528
Rated mains frequency		Hz	50/60
Operating mains frequency range		Hz	45...65
Rated mains current without mains choke		17.2 (heavy load) / 18.3 (standard load)	
Rated mains current with mains choke		12.4 (heavy load) / 14.5 (standard load)	
Output type		Three-phase	
Output voltage range		VAC	0...480
Output frequency range		Hz	0...599
Current overload		%/s	150% for 60s; 200% for 3s
Apparent output power		8.7 (heavy load) / 10.5 (standard load)	
Power loss		4kHz: 145W (heavy load) / 173 (standard load)	
Brake chopper		Yes	
Switching frequency		2...16kHz	
Max motor cable length			
Shielded		Without EMC category	m 100


	Category C1	m	3
	Category C2	m	20
	Category C3	m	35
Unshielded			
	Without EMC category	m	200
Functions			
Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless		
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer		
3-wire control	Yes		
S-shape curves	Yes		
Slip compensation	Yes		
Flying restart	Yes		
Access to DC bus	Yes		
DC braking	Yes		
DC injection at start	Yes		
PID control	Yes, with sleep and rinse function		
Sequencer (programmable frequency/time cycles)	Yes		
Preset speeds	Yes		
Motorpotentiometer	Yes		
Different parameter configuration sets	Yes		
Parameters changeover function	Yes		
Favorite parameters menu	Yes		
Autotuning	No		
Safe torque Off (STO) safety function	Optional		
PTC probe input	Yes		

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse		
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)		
Input and Output			
Number of digital input	Nr.	5	
Digital input type	Selectable PNP or NPN logic		
Number of digital output	Nr.	2	
Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output		
Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC		
Number of analog input	Nr.	2	
Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA		
Number of analog output	Nr.	1	
Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA		
Ambient conditions			
Temperature	Operating temperature		
	min	°C	-10
	max	°C	+55

		Current derating	switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C
Storage temperature			
		min	°C
		max	°C
			-25
			+60
Relative humidity			%
			5...95% (with no condensing)
Max altitude			m
			4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)
Housing			
Installation position			Vertical
IP degree of protection			IP20
Dimensions (W x H x D)		mm	90 x 278 x 130
Weight		Kg	2.45
Dimensions			

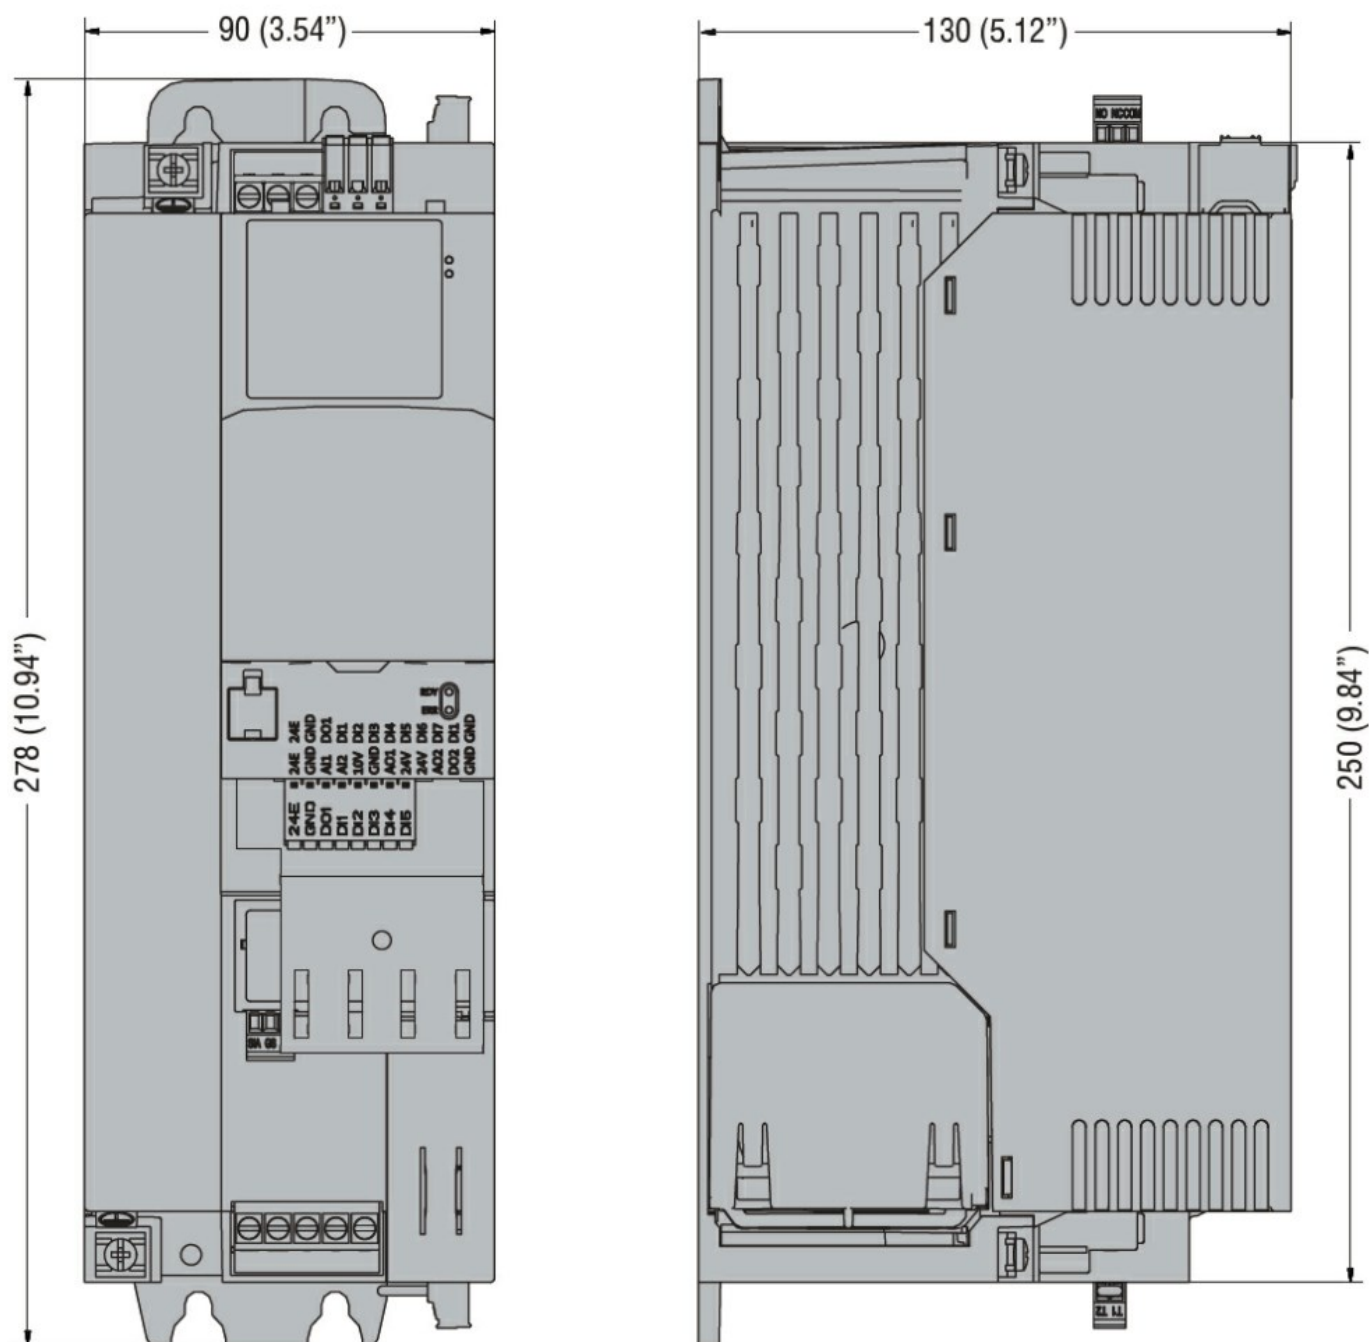

Wiring diagrams

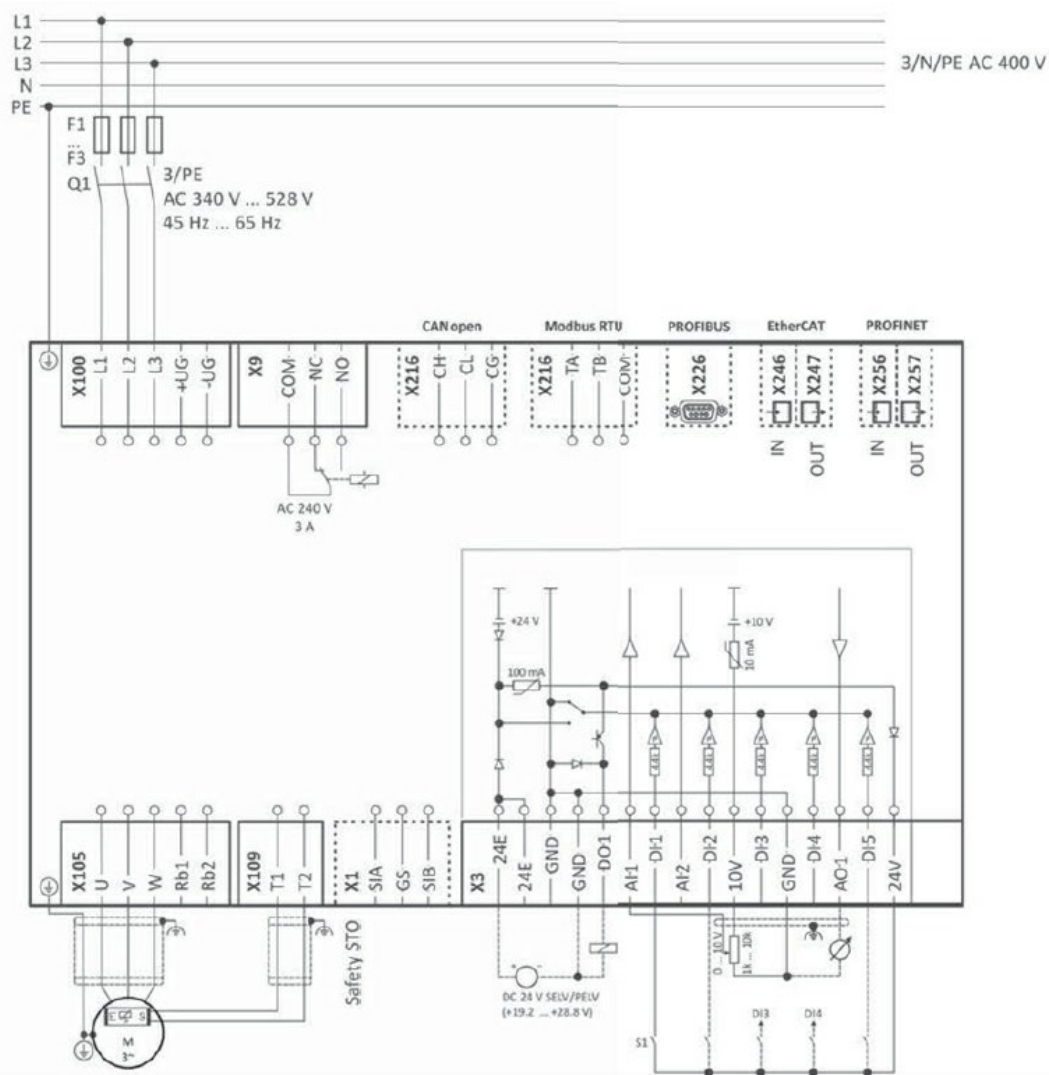

Certifications and compliance

Compliance

CSA 22.2 n°274

EN 61800-5-1

UL61800-5-1

Certificates

CSA

cULuS

EAC

RCM

ETIM classification

ETIM 8.0

EC001857 -
Frequency
converter ≤ 1 kV