





|   |                     |     |      |
|---|---------------------|-----|------|
| Product designation                                   | Reversing contactor |     |      |
| Product type designation                              | BFA009              |     |      |
| Electrical features                                   |                     |     |      |
| Maximum operating current (≤440V)                     | A                   | 9   |      |
| Contact characteristics                               |                     |     |      |
| Operational current Ie                                | AC-3 (≤440V ≤55°C)  | A   | 9    |
| Rated operational power AC-3 (T≤55°C)                 | 230V                | kW  | 2.2  |
|   | 400V                | kW  | 4.2  |
|   | 415V                | kW  | 4.5  |
|   | 440V                | kW  | 4.8  |
|   | 500V                | kW  | 5.5  |
|   | 690V                | kW  | 7.2  |
| Built-in auxiliary contacts                           | NO                  | 0   |      |
|   | NC                  | 1   |      |
| UL technical data                                     |                     |     |      |
| Maximum UL/CSA horsepower ratings single-phase        | 110V-120V           | HP  | 0.75 |
|   | 220V-240V           | HP  | 2    |
| Maximum UL/CSA horsepower ratings three-phase, 3-pole | 200V-208V           | HP  | 3    |
|   | 220V-240V           | HP  | 3    |
|   | 440V-480V           | HP  | 5    |
|   | 550V-600V           | HP  | 7.5  |
| Mechanical features                                   |                     |     |      |
| Terminals type  | Clamp screw         |     |      |
| Weight  | g                   | 760 |      |
| Dimensions  |                     |     |      |

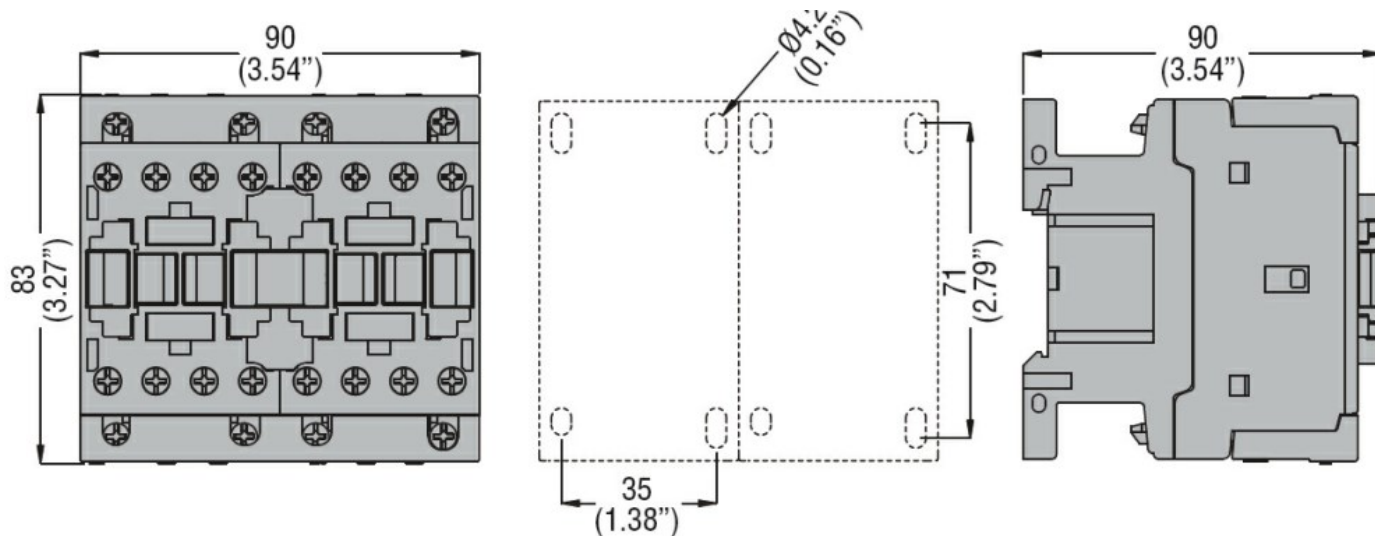

## Wiring diagrams

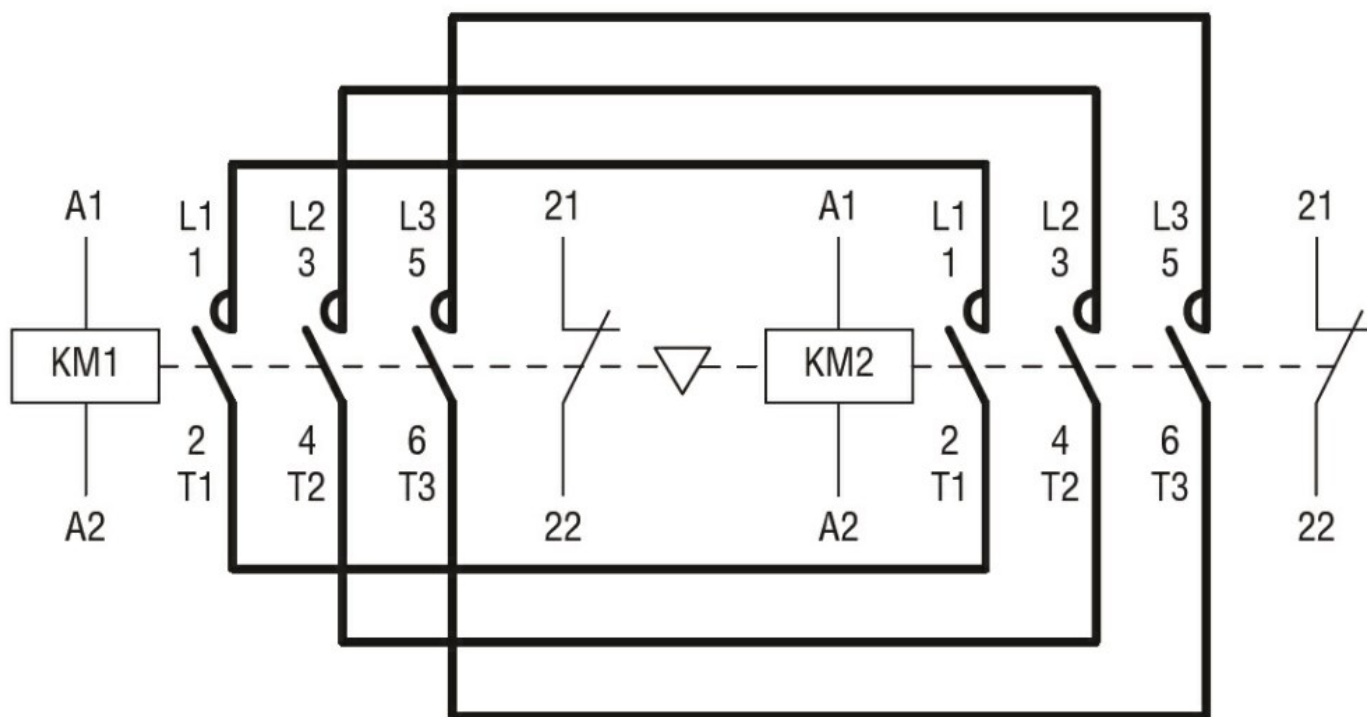

## Certifications and compliance

### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

### Certificates

cULus

## ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination