



batteries

Product designation	Automatic battery chargers
Product type designation	BCG
Туре	Single phase automatic battery charger 1 charging level for sealed and non- sealed lead-acid

Power supply Rated voltage Us

Raled vollage US			
	min	VAC	110
	Max	VAC	240 ±10%
Operational frequency			
	min	Hz	50 ±10%
	max	Hz	60 ±10%
Power consumption			
	Max	VA	284
	Max	W	290
Internal fuse		А	6.3
Charging cycle			
Reference standards			IEC62368-1
			non-sealed and
Battery type			sealed lead-acid
			batteries
Battery voltage		VDC	12
Charging voltage (Uc)			in pos. V1:13.8; V2:13.5
Boost		% Uc	+4.4
Charging current (Ic)		А	12
Charging current adjustment		% Ic	20 to 100
			Main supply fuse;
			charging
			inhibition due to:
			1. Short circuit at
Protections			battery terminals;
			2. Reverse
			battery polarity; 3. Low voltage at
			battery poles; 4.
			Output overload.
Indications			Output overload.
LED indicator for operating status			Yes
LED reverse battery polarity			Yes
Alarm output circuit			
Output type			1 relay


BCG1212




ENERGY AND AUTOMATION

Rated capacity	5A 30VD0	С
Mechanical features		
Housing type	Internal pa mounting	anel
Terminals type	Fixed	
Fixing	35mm DIN Screw fixi	
Weight	g 710	
Ambient conditions		
Temperature		

Operating temperature				
	min	°C	-30	
	max	°C	+55	
Storage temperature				
	min	°C	-30	
	max	°C	+80	
Protection degree			IP20	
Dimonsions				

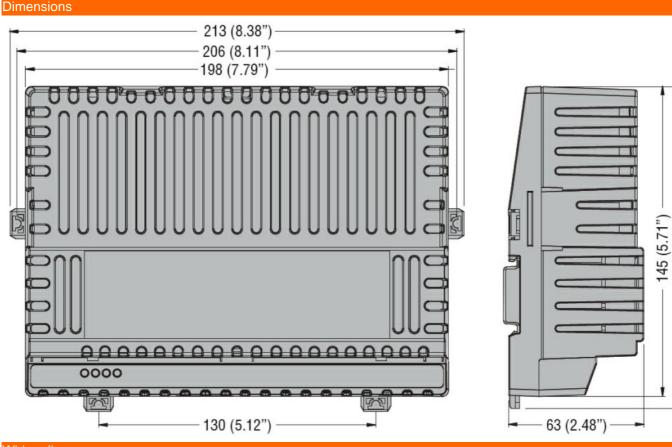

Wiring diagrams



Certifications and compliance

151 (5.94")



Compliance		
	CSA C22.2 n°60950-1	
	IEC/EN/BS 61000-6-2	
	IEC/EN/BS 61000-6-3	
	IEC/EN/BS 62368-1	
	UL 60950-1	
Certificates		
	cURus	
	EAC	
ETIM classification		
ETIM 8.0		EC000359 -

Universal charger