



Product designation Product type designation		Variable speed drives VLA1
General characteristics		
Rated power supply voltage		200240VAC 50/60Hz
Rated output voltage	VAC	Three-phase 0240VAC 0- 599Hz
Rated output current	А	7
Rated output power	kW	1.5
Rated output power	HP	2
EMC filter		Built-in EMC suppressor cat. C2
Communication port		None
Technical features		
Input type		Single-phase
Rated mains voltage	VAC	200240
Operating mains voltage range	VAC	170264
Rated mains frequency	Hz	50/60
Operating mains frequency range	Hz	4565
Operating mains frequency range Rated mains current without mains choke	Hz	4565 16.7
	Hz	
Rated mains current without mains choke	Hz	16.7
Rated mains current without mains choke Rated mains current with mains choke	Hz	16.7 13.9 Three-phase 0240
Rated mains current without mains choke Rated mains current with mains choke Output type		16.7 13.9 Three-phase
Rated mains current without mains choke Rated mains current with mains choke Output type Output voltage range	VAC	16.7 13.9 Three-phase 0240
Rated mains current without mains choke Rated mains current with mains choke Output type Output voltage range Output frequency range	VAC Hz	16.7 13.9 Three-phase 0240 0599 150% for 60s,
Rated mains current without mains choke Rated mains current with mains choke Output type Output voltage range Output frequency range Current overload	VAC Hz	16.7 13.9 Three-phase 0240 0599 150% for 60s, 200% for 3s
Rated mains current without mains choke Rated mains current with mains choke Output type Output voltage range Output frequency range Current overload Power loss	VAC Hz	16.7 13.9 Three-phase 0240 0599 150% for 60s, 200% for 3s 50W

Shielded

Functions	Without EMC category	m	50
	Category C2	m	20
Motor control modes			V/f linear, quadratic torque, sensorless vector control, ECO mode



		External
		potentiometer
		010kΩ Voltage
		signals: 0
		10VDC Current
		signals: 0/4…
Speed reference signals		20mA Buttons on
		front keyboard
		Door-mount
		installation kit 15
		preset speeds
		via digital inputs
		Motor
3-wire control		potentiometer Yes
S-shape curves		Yes
Slip compensation		Yes
Flying restart		Yes
Access to DC bus		No
DC braking		Yes
DC injection at start		Yes
PID control		Yes, with sleep
		and rinse function
Sequencer (programmable frequency/time cycles)		Yes
Preset speeds		Yes
Motorpotentiometer		Yes
Different parameter configuration sets		Yes
Parameters changeover function		Yes
Favorite parameters menu		Yes
Autotuning		No
Safe torque Off (STO) safety function		No
PTC probe input		No
		Overcurrent
		Output short
		circuit and
		earth/ground
Protections		leakage
Protections		Overvoltage
		Undervoltage Phase loss Motor
		heat overload
		(i2t) Overspeed
		Speed reverse
		Multi-pump PID
		control (1 main
		pump frequency
		regulated + 2
Special funct.		auxiliary pumps
		activated in direct
		mode in case of
		necessity)
Input and Output		_
Number of digital input	Nr.	5 Salastable DND
Digital input type		Selectable PNP or NPN logic
Number of digital output	Nr.	2


VLA115A240




			1 relay output with changeover
Digital output arrangement			contact (C/O- SPDT) + 1 digital
			output
			Relay output: 3A 250VAC Digital
Output contacts ratings			output: 100mA max 30VDC
Number of analog input		Nr.	2
Analog input type			Analog input 1: configurable 0/210VDC, 0 5VDC, 0/4 20mA Analog input 2: configurable
			0/2…10VDC or 0…5VDC
Number of analog output		Nr.	1
			configurable as
Analog output type			010VDC, 0 5VDC, 2
Analog output type			10VDC, 0/4
			20mA
Ambient conditions			
Temperature Operating temperature			
Operating temperature	min	°C	-10
	max	°Č	+55
	Current derating		2.5%/°C over 40°C
Storage temperature			
	min	°C	-25
	max	°C	+60
Relative humidity		%	595% (with no condensing)
Max altitude		m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)
Housing			
Installation position			Vertical
IP degree of protection			IP20
Dimensions (W x H x D)		mm	60 x 281 x 130
Weight Dimensions		Kg	1.35




VLA115A240 FREQUENZUMRICHTER,1 PHASE AC 1.5 KW 200/240V 50/60HZ MIT FILTER CAT, C2

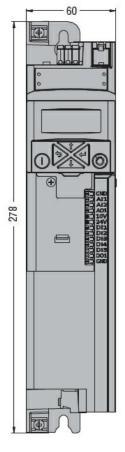

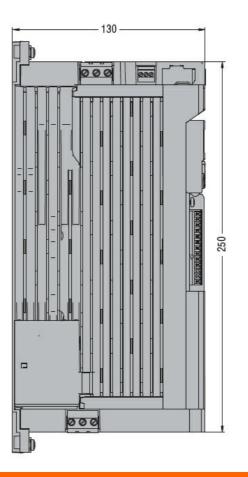

Wiring diagrams



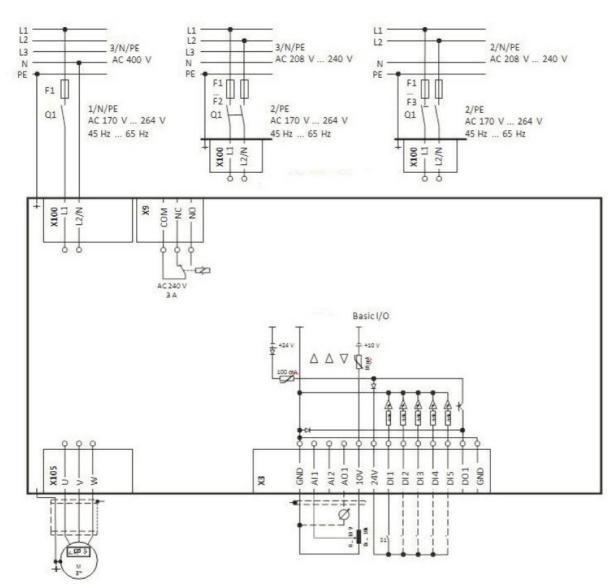

Certifications and compliance

Compliance	
	CSA 22.2 No. 274
	EN 61800-5-1
	UL61800-5-1
Certificates	
	cULus
	EAC
	RCM
ETIM classification	n

ETIM 8.0

EC001857 -Frequency converter =< 1 kV