INTERRUPTEURS DE POSITION 1NO+1NC BRUSQUE À COMMANDE PAR CÂBLE POUR ARRÊT SIMPLE (ISO 13850)




Product designation			Rope-pull lever with reset buttom
Product type designati		RS131310	
General characteristics			
General characteristics			
Housing Material		Polymer thermoplastic	
Contact characteristics			
Type of contact			1NO+1NC
Thermal current Ith		A	10
Rated insulation voltage Ui		V	250
Short-circuit protection with fuse			10 gG/SC QUICK FUSE
IEC Conventional free	A	10	
Resistance per pole (a	verage value)	mΩ	<10
Operations			
Mechanical life		cycles	100000
Mechanical operation		cycles/h	1800
Output characteristics			400000
Mechanical life		cycles	100000
Mechanical features			Caraviad
Operating head fixing			Screwed
Operating torque		N	25
		lb	5.6
Tightening torque (Max)	15	0.0
rigitioning torque (max	Switch fixing		
	C.M.C.T.ID.M.Ig	Nm	2.5
		lbin	22.1
	Contact terminals		
		Nm	0.8
		lbin	7
	Body lid screw fixing		
		Nm	0.8
		lbin	7
Conductor section			
	AWG/Kcmil		
		max	14
	IEC		
		min mm²	1 or 2
		max mm²	2.5
Cable connection			Self-releasing screw terminal
Cable entry			PG11
Weight		~	92
Ambient conditions		g	JL
Ambient conditions			

ENERGY AND AUTOMATION


INTERRUPTEURS DE POSITION 1NO+1NC BRUSQUE À COMMANDE PAR CÂBLE POUR ARRÊT SIMPLE (ISO 13850)

Pollution degree				3	
Temperature					
	Operating temperature				
		min	°C	-25	
		max	°C	+70	
	Storage temperature				
		min	°C	-40	
		max	°C	+70	

Dimensions

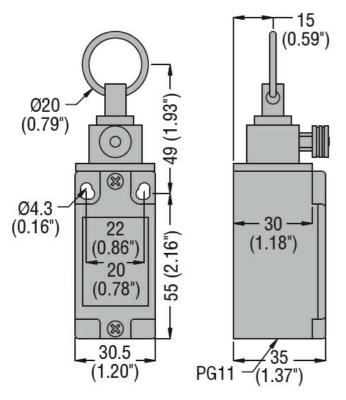

Wiring diagrams

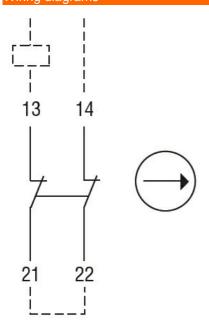

Certifications and compliance

Compliance



RS131310

INTERRUPTEURS DE POSITION 1NO+1NC BRUSQUE À COMMANDE PAR CÂBLE POUR ARRÊT SIMPLE (ISO 13850)

	CSA C22.2 n° 14
	IEC/EN 60204-1
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	ISO 13850; UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0 EC000030 - End switch