



Product designation

Product type designation

Auxiliary supply voltage

Number of inputs

Number of outputs

Max I/O number

Starter kit
complete with
LRD12RA024
base module,
LRXSW software
and LRXC03
cable
LRDKIT12RA024
24VAC
Nr. 8 digital
Nr. 4 relay
12 (8 inputs + 4
outputs) up to 36
with LRE
modules

Power supply

Rated auxil. supply voltage		24VAC
Operating voltage range		20.4...28.8VAC
Operating frequency range	Hz	47...63
Average current consumption	mA	290
Power consumption Max	W	7

Digital inputs

Number of digital input	Nr.	8
Rated voltage	V	24VAC (50/60Hz)
Input signals	State 0 (OFF) State 1 (ON)	<6VAC >14VAC

Response time

0 to 1 (OFF-ON)	90ms
1 to 0 (ON-OFF)	90ms

Digital outputs

Number of digital output	Nr.	4
type		Relay

System resources

Display	LCD display, 4 lines x 16 characters
---------	--

Connections


Terminals type	Screw
Tightening torque for terminals	max Nm 0.6 Max lbft 0.4

Conductor section

AWG/Kcmil

min	26
max	14

IEC			
	min	mm ²	0.14
	max	mm ²	2.5
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70
Relative humidity		%	20...90% without condensation
Housing			
Mounting		35mm DIN rail or screw fixing (M4x20mm)	
Degree of protection		IP20	
Dimensions (W x H x D)		mm	72 x 106 x 59.6
Weight		g	424
Dimensions			

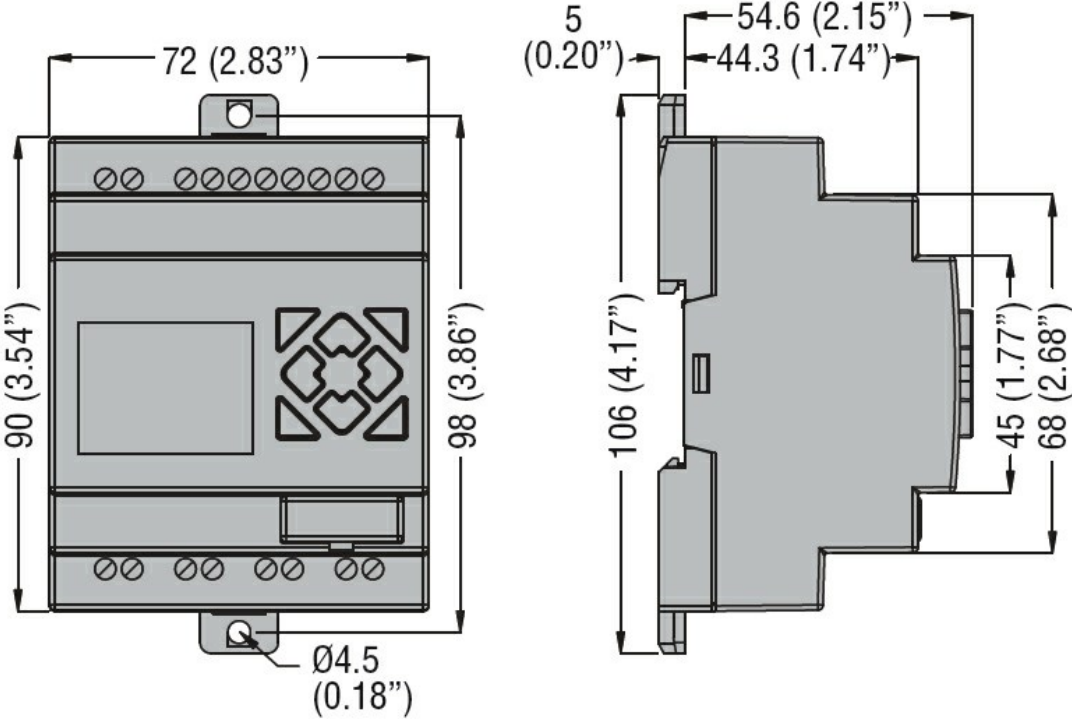

Certifications and compliance	
Compliance	
	CSA C22.2 n° 142
	IEC/EN 61131-2
	UL508
Certificates	
	cULus
	EAC

ETIM classification	
ETIM 8.0	EC002581 - PLC device set