


START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 220...240VAC




Product designation			Possible starting of stand-by motor. Modular version
Product type designation			LVMP10 Start-up priority
Function			change relay. Possible starting of stand-by motor
Auxiliary supply			
Supply voltage Type			Single voltage
Rated auxiliary supply voltage Us			
AC			
	min	VAC	220
	Max	VAC	240
Operating voltage range			0.851.1 Us
Rated frequency		Hz	50/60
Power consumption Max		VA	4.8
Power dissipation Max		W	3
Relay outputs			
Number of relays		Nr.	2
Relay state			Normally de- energised, energises at tripping
Contact arrangement			2 x 1NO-SPST contact
Rated operational voltage AC (IEC)		VAC	250
Maximum switching voltage		VAC	400
IEC Conventional free air thermal current Ith		Α	8
UL/CSA and IEC/EN 60947-5-1 designation			B300
Electrical life (with rated load)		cycles	10 ⁵
Mechanical life		cycles	30x10 ⁶
Indications			
Indication			1 green LED for power on 1 red LED for relay state
Functions			
3 detecting electrodes (MIN, MAX and COM)			No
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM			No
Sensitivity adjustment 2.550k Ω			No
Sensitivity adjustment 2.5100k Ω			No
Sensitivity adjustment 2.5200k Ω			No

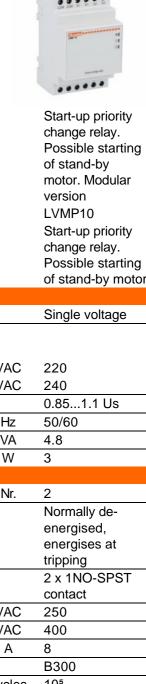

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 220...240VAC


Adjustable consitiuity full code value 25 50 100 200 k O			No
Adjustable sensitivity full-scale value 25-50-100-200 k Ω			No
Separate sensitivity adjustment for MAX probe (foam detection)			No
Emptying function Filling function			No
			No
Emptying function with MIN and/or MAX alarm Filling function with MIN and/or MAX alarm			No
·			No
Emptying function with pump priority change Filling function with pump priority change			No
Tank filling, well drawing and alarm			No
			_
Filling-emptying adjustment selector			No
Programming selector for 5 different			No No
Motor start-up priority change Connections			INO
			Corour
Terminals type			Screw
Tightening torque for terminals		Nima	0.0
	max	Nm	0.8
Ocea de estas constituira	max	Ibin	7
Conductor cross section			
AWG/Kcmil		A1A/O	0.4
	min Max	AWG	24
IFO	Max	AWG	12
IEC			0.0
	min Mov	mm²	0.2
Insulations	Max	mm²	4
		V	415
Rated insulation voltage Ui Rated impulse withstand voltage Uimp		kV	4
Operating frequency withstand voltage		kV	2.5
Ambient conditions		KV	2.5
Temperature			
Operating temperature	min	°C	-20
	max	°C	+60
Storage temperature	Παλ		+00
Storage temperature	min	°C	-30
	max	°C	+80
Housing	Пах		+00
riodaling			Modular DIN rail
Execution			mounting
N° of modules			3
			Self-extinguishing
Material			polyamide
			35mm DIN rail
			(IEC/EN 60715)
Mounting			or by screws
			using extractable
			clips
IEC degree of protection			IP40 on front / IP20 on terminals
Dimensions (W x H x D)		mm	53.5 x 104.7 x 64.9
			64.9
Dimensions (W x H x D) Weight Dimensions		mm g	



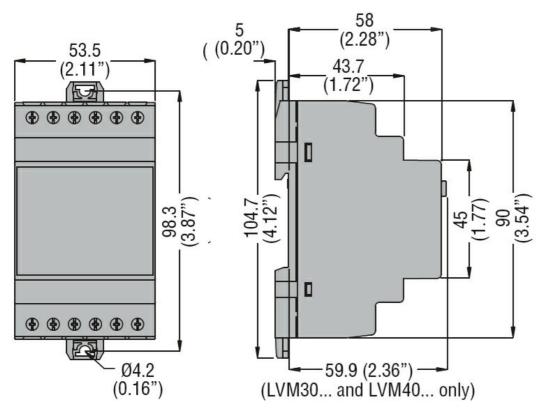

Wiring diagrams


2-wire connection



C1 = Primary

C2 = Secondary / Standby

3-wire connection



C1 = Start Primary

C2 = Start Standby C3 = Stop Primary

C4 = Stop Standby

Certifications and compliance

Compliance



LVMP10A240

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 220...240VAC

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL508

CULus

EAC

ETIM classification

ETIM 8.0

Certificates

EC001447 - (Fill) level monitoring relay