

DIRECT-ON-LINE-STARTER, ENCLOSED WITHOUT THERMAL OVERLOAD RELAY, WITH **electric** START AND STOP/RESET BUTTONS, WITH BF09/BF18 CONTACTOR, 18A MAX (≤440V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ **ENERGY AND AUTOMATION**


9	
0	
6	

Product designation Product type designation			Direct-on-line starter M1P01810
Electrical features			
Maximum operating current (≤440V)		Α	18
Components			
Starter enclosure standard supplied			M1PA
Contactor standard supplied			BF1810A
Thermal relay to purchase separately			RF38
Mechanical features			
Weight		g	910
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
Frontal IP degree			IP65
Dimensions			



DIRECT-ON-LINE-STARTER, ENCLOSED WITHOUT THERMAL OVERLOAD RELAY, WITH **electric** START AND STOP/RESET BUTTONS, WITH BF09/BF18 CONTACTOR, 18A MAX (≤440V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

ENERGY AND AUTOMATION

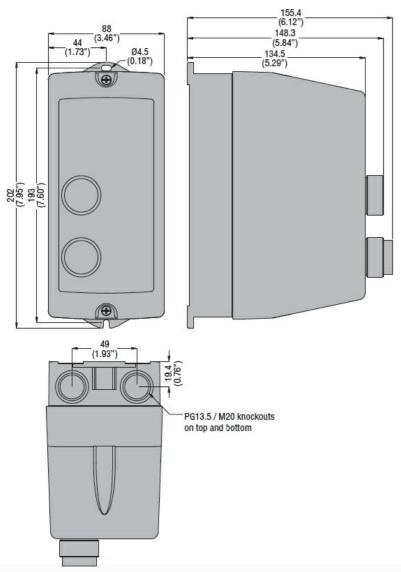


Wiring diagrams



DIRECT-ON-LINE-STARTER, ENCLOSED WITHOUT THERMAL OVERLOAD RELAY, WITH **electric** START AND STOP/RESET BUTTONS, WITH BF09/BF18 CONTACTOR, 18A MAX (≤440V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

ENERGY AND AUTOMATION

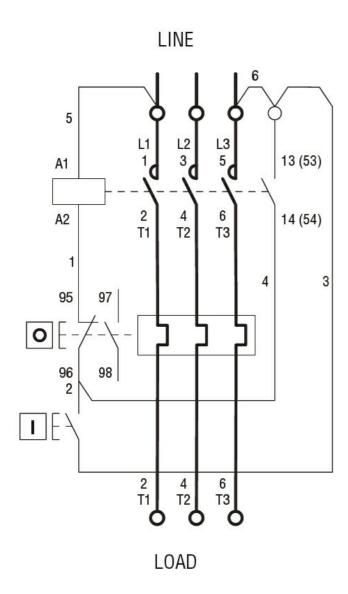

I = Start; O = Stop/Reset

Certifica	tions and	l comp	liance
-----------	-----------	--------	--------

Compliance

IEC/EN 60947-1 IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

Certificates

CSAus cULus EAC

ETIM classification

ETIM 8.0

EC001037 -Motor starter/Motor starter combination