



Product designation

Product type designation

Type

Automatic battery
chargers
BCE
Single phase
automatic battery
charger 1
charging level for
lead-acid
batteries

Power supply

Rated voltage U_s

min	VAC	220
Max	VAC	240 $\pm 10\%$

Operational frequency

min	Hz	50 $\pm 5\%$
max	Hz	60 $\pm 5\%$

Power consumption

Max	VA	166
Max	W	26

Charging cycle

Reference standards	IEC60335-2-29
---------------------	---------------

Battery type	lead-acid
--------------	-----------

Battery voltage	VDC	24
-----------------	-----	----

Charging voltage (U_c)		27.6
----------------------------	--	------

Charging current (I_c)	A	2.5
----------------------------	---	-----

Charging current adjustment	% I_c	30 to 100
-----------------------------	---------	-----------

Protections

Battery output
fuse; charging
inhibition due to:
1. Short circuit at
battery terminals;
2. Reverse
battery polarity; 3.
Low voltage at
battery poles; 4.
Output overload.

External fuse	1
---------------	---

Indications

LED indicator for operating status	Yes
------------------------------------	-----

LED reverse battery polarity	Yes
------------------------------	-----

Alarm output circuit

Output type	NPN transistor
-------------	----------------


Mechanical features

Housing type	Internal panel mounting
--------------	----------------------------


Terminals type	Removable/plug- in
----------------	-----------------------

Fixing				Screw fixing
Weight			g	1992
Ambient conditions				
Temperature				
Operating temperature		min	°C	-10
		max	°C	+50
		Storage temperature		
		min	°C	-30
		max	°C	+80
Protection degree				IP00

Dimensions

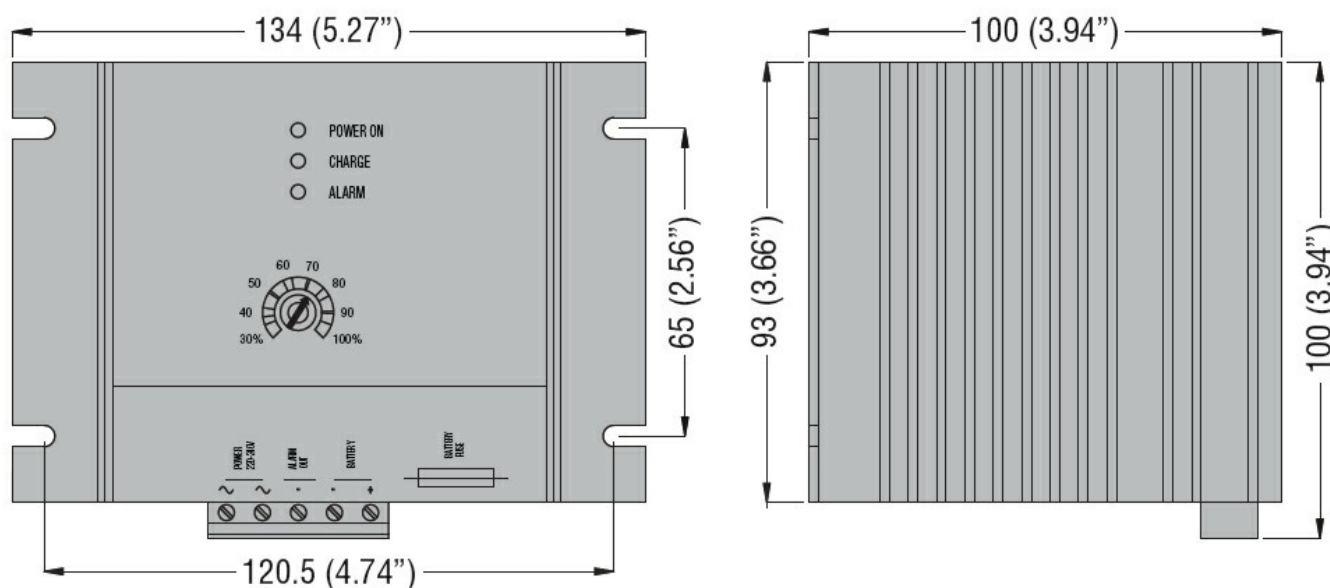

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60335-2-29

Certificates

EAC

ETIM classification

ETIM 8.0

EC000359 -
Universal charger