

# LEVEL CONTROL STARTER KIT COMPLETE CU LVM20A024 RELAY AND TWO SN1 ELECTRODES

Product type designation			Level control relay for emptying function. Single voltage. Modular version - KIT LVMKIT20
Function Auxiliary supply			Emptying
Supply voltage Type			Single voltage
Rated auxiliary supply voltage Us			
AC			
	min	VAC	24
Operating voltage range			0.851.1 Us
Rated frequency		Hz	50/60
Power consumption Max		VA	3.5
Power dissipation Max Output characteristics		W	1.8
Number of connectable electrodes		Nr.	3
Number of connectable electrodes		INI.	Electrode and
Type of electrode			electrode holders: SN1 / SCM / CGL / PS31 / PS3S or similar
Electrode voltage			7.5 VAC
Sensitivity		kΩ	2.550 adjustable
Time delay			
Tripping time		S	≤0.6
Resetting time		S	≤0.75
Relay outputs		N.I.	4
Number of relays  Relay state		Nr.	Normally de- energised, energises at tripping
Contact arrangement			1 changeover contact C/O- SPDT
Rated operational voltage AC (IEC)		VAC	250
Maximum switching voltage		VAC	400
IEC Conventional free air thermal current Ith		Α	8
UL/CSA and IEC/EN 60947-5-1 designation			B300
Electrical life (with rated load)		cycles	105
Mechanical life		cycles	30x10 <sup>6</sup>
Indications			






### LEVEL CONTROL STARTER KIT COMPLETE CU LVM20A024 RELAY AND TWO SN1 **ELECTRODES**

Indication			1 green LED for power on 1 red LED for relay state
Functions			
3 detecting electrodes (MIN, MAX and COM)			Yes
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM			No
Sensitivity adjustment 2.550k Ω			Yes
Sensitivity adjustment 2.5100k Ω			No
Sensitivity adjustment 2.5200k Ω			No
Adjustable sensitivity full-scale value 25-50-100-200 k $\Omega$			No
Separate sensitivity adjustment for MAX probe (foam detection)			No
Emptying function			Yes
Filling function			No
Emptying function with MIN and/or MAX alarm			No
Filling function with MIN and/or MAX alarm			No
Emptying function with pump priority change			No
Filling function with pump priority change			No
Tank filling, well drawing and alarm			No
Filling-emptying adjustment selector			No
Programming selector for 5 different			No
Motor start-up priority change			No
Connections			INU
			Screw
Terminals type			Sciew
Tightening torque for terminals	may	Nm	0.8
	max	Ibin	0.6 7
Conductor cross section	max	IDIII	
AWG/Kcmil	min	AWG	24
	min Max	AWG	12
IEC	IVIAX	AVVG	12
IEC	min	mama <sup>2</sup>	0.2
	min Max	mm²	0.2
Insulations	Max	mm²	4
		V	44E
Rated insulation voltage Ui			415
Rated impulse withstand voltage Uimp		kV	6
Operating frequency withstand voltage		kV	4
Double insulation Supply / relay / electrode		VAC	≤250
Ambient conditions			
Temperature			
Operating temperature		0.0	00
	min	°C	-20
<del></del>	max	°C	+60
Storage temperature		0 =	
	min	°C	-30
	max	°C	+80
Housing			A. 1.1. Part
Execution			Modular DIN rail
N10 - £ d1			mounting
N° of modules			2
Material			Self-extinguishing polyamide


**ENERGY AND AUTOMATION** 

# LEVEL CONTROL STARTER KIT COMPLETE CU LVM20A024 RELAY AND TWO SN1 ELECTRODES

Mounting		35mm DIN rail (IEC/EN 60715) or by screws using extractable clips
IEC degree of protection		IP40 on front / IP20 on terminals
Dimensions (W x H x D)	mm	35.8 x 104.7 x 64.9
Weight	g	215

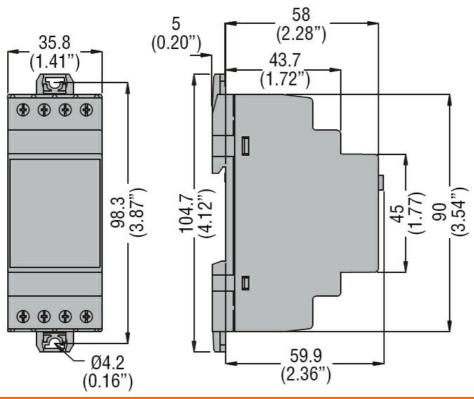

#### Wiring diagrams



### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL508

#### Certificates



## LVMKIT20A024

LEVEL CONTROL STARTER KIT COMPLETE CU LVM20A024 RELAY AND TWO SN1 ELECTRODES

ETIM classification

ETIM 8.0

EC001447 - (Fill) level monitoring relay