




Product designation		Variable speed drives	
Product type designation		VLB3	
General characteristics			
Rated power supply voltage		400...480VAC 50/60Hz	
Rated output voltage		VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current		A	13
Rated output power		kW	5.5
Rated output power		HP	7.5 (Heavy load) / 10 (Standard load)
EMC filter		Built-in EMC suppressor cat. C2	
Communication port		RS485, Modbus- RTU	
Technical features			
Input type		Three-phase	
Rated mains voltage		VAC	400...480
Operating mains voltage range		VAC	340...528
Rated mains frequency		Hz	50/60
Operating mains frequency range		Hz	45...65
Rated mains current without mains choke		17.2 (heavy load) / 18.3 (standard load)	
Rated mains current with mains choke		12.4 (heavy load) / 14.5 (standard load)	
Output type		Three-phase	
Output voltage range		VAC	0...480
Output frequency range		Hz	0...599
Current overload		%/s	150% for 60s; 200% for 3s
Apparent output power		8.7 (heavy load) / 10.5 (standard load)	
Power loss		4kHz: 145W (heavy load) / 173 (standard load)	
Brake chopper		Yes	
Switching frequency		2...16kHz	
Max motor cable length			
Shielded		Without EMC category	m 100

	Category C1	m	3
	Category C2	m	20
	Category C3	m	35
Unshielded			
	Without EMC category	m	200
<b>Functions</b>			
Motor control modes			V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless
Speed reference signals			External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer
3-wire control			Yes
S-shape curves			Yes
Slip compensation			Yes
Flying restart			Yes
Access to DC bus			Yes
DC braking			Yes
DC injection at start			Yes
PID control			Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)			Yes
Preset speeds			Yes
Motorpotentiometer			Yes
Different parameter configuration sets			Yes
Parameters changeover function			Yes
Favorite parameters menu			Yes
Autotuning			No
Safe torque Off (STO) safety function			Optional
PTC probe input			Yes

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)
<b>Input and Output</b>	
Number of digital input	Nr. 5
Digital input type	Selectable PNP or NPN logic
Number of digital output	Nr. 2
Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output
Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC
Number of analog input	Nr. 2
Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA
Number of analog output	Nr. 1
Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA
<b>Ambient conditions</b>	
Temperature	
Operating temperature	
	min °C -10
	max °C +55

		Current derating	switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C
Storage temperature		min max	°C °C -25 +60
Relative humidity			% 5...95% (with no condensing)
Max altitude		m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)
<b>Housing</b>			
Installation position			Vertical
IP degree of protection			IP20
Dimensions (W x H x D)		mm	90 x 278 x 130
Weight		Kg	2.45
<b>Dimensions</b>			



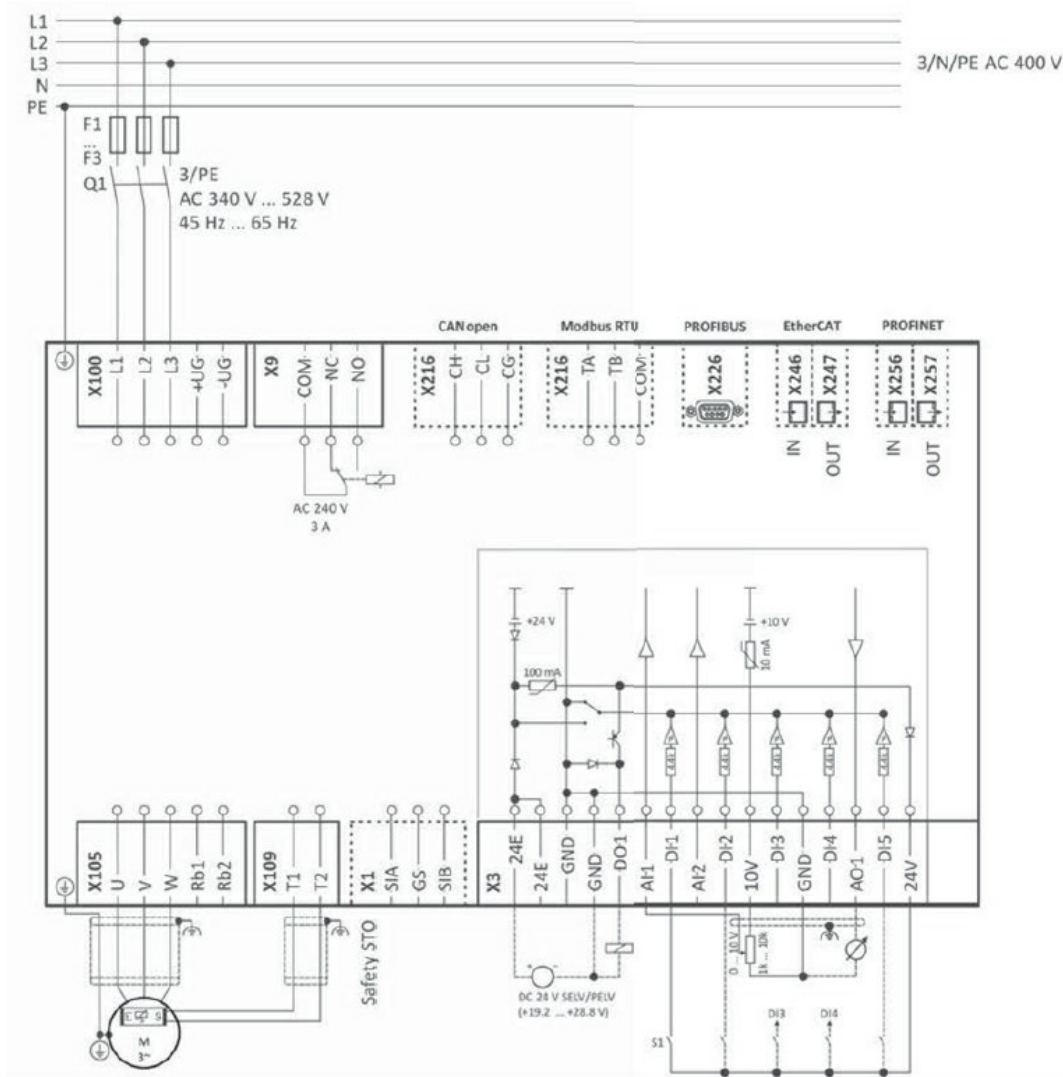

## Certifications and compliance

### Compliance

CSA 22.2 n°274  
EN 61800-5-1  
UL61800-5-1

### Certificates

CSA  
cULus  
EAC  
RCM

## ETIM classification

ETIM 8.0

EC001857 -  
Frequency  
converter =< 1 kV