



Product designation

Residual current
circuit breakers
(RCCB)

Product type designation

P1RD

Number of poles

4P

Number of DIN modules

4

Compliance

IEC

Electrical features

Rated insulation voltage U_i IEC/EN	V	400
Rated impulse withstand voltage U_{imp}	kV	4
Rated operational voltage AC (IEC)	VAC	230/400
Rated frequency	Hz	50/60
Rated current (I_n)	A	63
Residual operation characteristic		A
Rated residual current	mA	300
Short circuit rating (IEC)	kA	10
Electrical life	cycles	10000


Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+80
Max altitude		m	2000

Mechanical features

Operating position		normal		Vertical plan
Fixing		35mm DIN rail		
Tightening torque for terminals		max	Nm	2
		max	lbin	15
Terminals tool		Pz 2		
Conductor section		IEC		
		min	mm²	2.5
		max	mm²	35
		AWG/Kcmil		
		min		14
		max		2
Mechanical life		cycles	20000	
Weight		g	326	
Frontal IP degree		IP20		
Pollution degree		2		

Dimensions

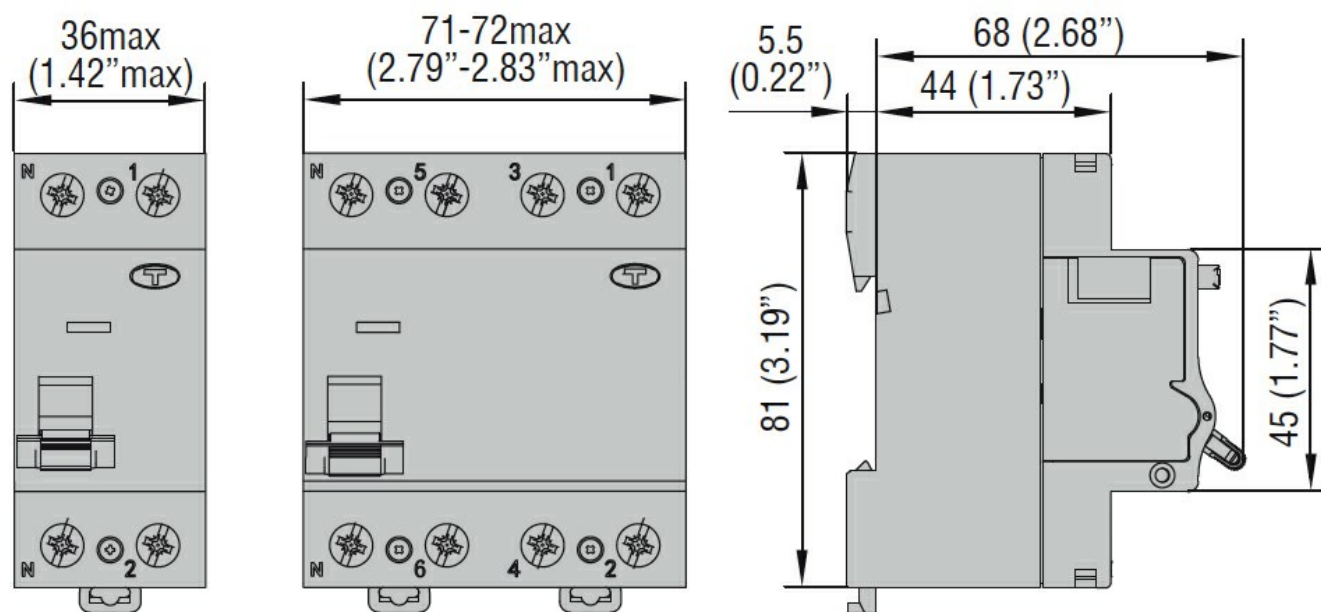

Certifications and compliance

Compliance

IEC/EN/BS 61008-1

Certifications

EAC

TÜV-SUD

ETIM classification

ETIM 8.0

EC000003 -
Residual current
circuit breaker
(RCCB)